ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-5

PARAMETERS OF THE OPENING ANGLE OF THE WINGED BLADES IN THE FERTILIZATION SYSTEM OF A CHISEL-CULTIVATOR

Dusiyorov J.J.
Botirov S.G‘.
O‘ngboyev A.M.
Tashkent State Technical University
Tashkent Metro State Unitary Enterprise
Tashkent State Technical University
anvar.6637676@gmail.com

Annotation. Due to ongoing climate change, the demand for water in agriculture is increasing annually, while water scarcity becomes more pronounced. Therefore, every drop of water must be efficiently conserved. Mineral nutrients are applied to improve the reclamation status of saline and gypsiferous soils before leaching them. However, these nutrients often do not reach the root layer of plants. To address this issue, we conducted a study to determine the optimal opening angle of the winged blades in the fertilizer system of a chisel-cultivator.
Keywords: winged blade, opening angle, crumbling angle, coverage width.

Introduction. Per the Concept for the Development of the Water Management Sector of the Republic of Uzbekistan for 2020–2030, several priority tasks have been outlined. These include:

- Preparing additional land areas for agricultural cultivation;
- Expanding the integration of modern innovative technologies into agricultural practices;
- Promoting such practices through government support;
- Attracting foreign investments and grants into the sector.

Currently, due to climate change, the demand for water in agriculture is rising, while water scarcity continues to worsen. This creates an urgent need for the efficient use and conservation of water resources.

In addition, to improve the reclamation condition of saline and gypsiferous lands, it is necessary to apply mineral nutrients. However, these nutrients often fail to reach the plant root zone. To address this problem, our research focuses on determining the optimal opening angle of the winged blades in the fertilizer system of a chisel-cultivator.

The aim is to improve the technological scheme of the chisel-cultivator-fertilizer, specifically for ameliorating gypsiferous soils. In this work, we examine the opening angle, the crumbling angle, and the coverage width of the large winged blade of the chisel-cultivator. We present the relevant equations and design schemes based on these parameters.

This subject has previously been explored by researchers such as T.S. Khudoyberdiev, A.T. Tokhtakoziev, A.N. Khudoyorov, Z.L. Botirov, B.U. Toshpolatov, and others.[1, 2, 3, 4]

Materials, methods, and research objectives. The following methods were applied in the research:

- Mathematical modeling of the opening angle of the large winged blades in the fertilizer system of the chisel-cultivator.
- Graphical analysis of the theoretical results obtained.
- Determination of the optimal opening angle by considering the internal and external friction angles of the soil.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-5

These methods determined the optimal opening angle of the large winged blade. This, in turn, contributes to improving the interaction processes between the blade and the soil. [5, 6,7, 8, 9]

Results and discussion. Opening angle of the large winged blade. [14, 15, 16] To determine this angle, we analyzed the interaction between the right wing of the large winged blade and the soil in the horizontal plane. The forces acting on the blade under open fracture conditions were considered, assuming that the fracture plane is oriented horizontally. Based on this assumption, the opening angle was determined using the following expression [10, 11, 12, 13]:

$$\gamma_{\check{y}} = arctg\frac{\sqrt{9tg^2\varphi_1 + 8} - 3tg\varphi_1}{2} \quad (1)$$

In Figure 1.1, a graph was constructed based on expression (1), showing the variation of the opening angle γ_o as a function of the soil's internal friction angle φ_1. The graph indicates that as φ_1 increases, the value of $\gamma_{\check{y}}$ decreases.

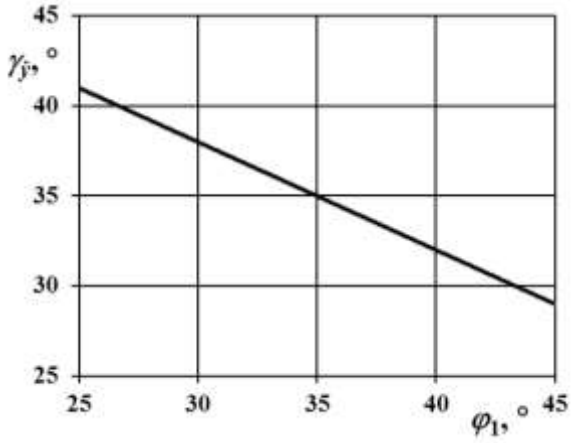


Figure 1.1. Graph of the variation of the opening angle $\gamma_{\check{y}}$ of the large winged blade concerning the internal friction angle φ_1 of the soil.

By substituting known values of φ_1 (30°–35°) into expression (1), it was determined that to minimize the draft resistance of the winged blade, the optimal opening angle γ_o should be within the range of 35°42′ to 38°23′.

Crumbling angle of the large winged blades

This parameter is determined using the following expression:

$$\alpha_{\text{ю}} = \alpha_{\check{y}} = \arcsin\left\{\left\{-\sin(\varphi_1+\varphi_2) + \sqrt{\sin^2(\varphi_1+\varphi_2) + \left[2+\frac{1}{2}\cos(\varphi_1+\varphi_2)\right]\left[1+\cos(\varphi_1+\varphi_2)\right]}\right\} : \left[2+\frac{1}{2}\cos(\varphi_1+\varphi_2)\right]\right\}, \quad (2)$$

where φ_1 and φ_2 are the internal and external friction angles of the soil, respectively, in degrees.

When condition (2) is satisfied, the soil fragmentation step reaches its minimum value, ensuring high-quality crumbling with minimal energy consumption.

Assuming φ_1 = 30°–35° and φ_2 = 35°–45°, calculations based on expression (2) indicate that the crumbling angle of the large winged blade should lie within the range of 24°28′ to 29°24′.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-5

Coverage width of the large winged blade

This parameter is determined using the following expression:

$$\left\{0{,}5b_{\check{y}} - \frac{\left[\sqrt{[\tau_к]^2 + 2q_o[\tau_к]b_{\check{y}}\dfrac{tg\alpha_{\check{y}}\sin(\alpha_{\check{y}}+\varphi_1)}{\cos\varphi_1\cos(\gamma_{\check{y}}+\varphi_1)}} - [\tau_к]\right]}{2q_o\sin(\alpha_{\check{y}}+\varphi_1)} ctg\alpha_{\check{y}}\cos\varphi_1\cos(\gamma_{\check{y}}+\varphi_1)\right\}\times$$


$$\times\frac{\left[\sqrt{[\tau_к]^2 + 2q_o[\tau_к]b_{\check{y}}\dfrac{tg\alpha_{\check{y}}\sin(\alpha_{\check{y}}+\varphi_1)}{\cos\varphi_1\cos(\gamma_{\check{y}}+\varphi_1)}} - [\tau_к]\right]}{q_o\sin\gamma_{\check{y}}\sin(\alpha_{\check{y}}+\varphi_1)} ctg\alpha_{\check{y}}\cos^2\varphi_1 <$$

$$< \frac{1}{2\sin\gamma_{\check{y}}}\left[0{,}5b_{\check{y}} - \frac{htg\dfrac{1}{2}(\alpha_{\check{y}}+\varphi_1+\varphi_2)\cos(\gamma_{\check{y}}+\delta)}{\cos\delta}\right]\frac{h}{\cos(\alpha_{\check{y}}+\varphi_1+\varphi_2)}. \quad (3)$$

As seen from expression (3), under the given working conditions (φ_1, φ_2) and the specified working depth (h), and using the previously determined values of α_o and γ_o, it is possible to achieve horizontal fragmentation of the soil under the influence of the large winged blades by properly selecting the coverage width.

Assuming the values $[\tau_k] = 2 \times 10^4$ Pa, $q_o = 1 \times 10^7$ N/m³, h = 20 sm, $\varphi_1 = 30°$, and $\varphi_2 = 40°$, and taking into account the previously determined values of $\alpha_{\check{y}}$ and $\gamma_{\check{y}}$.

Based on calculations using expression (3) and the given parameters, it was found that to achieve effective horizontal fragmentation of the soil—and consequently reduce energy density—the maximum coverage width of the large winged blade should be no more than 36 cm.

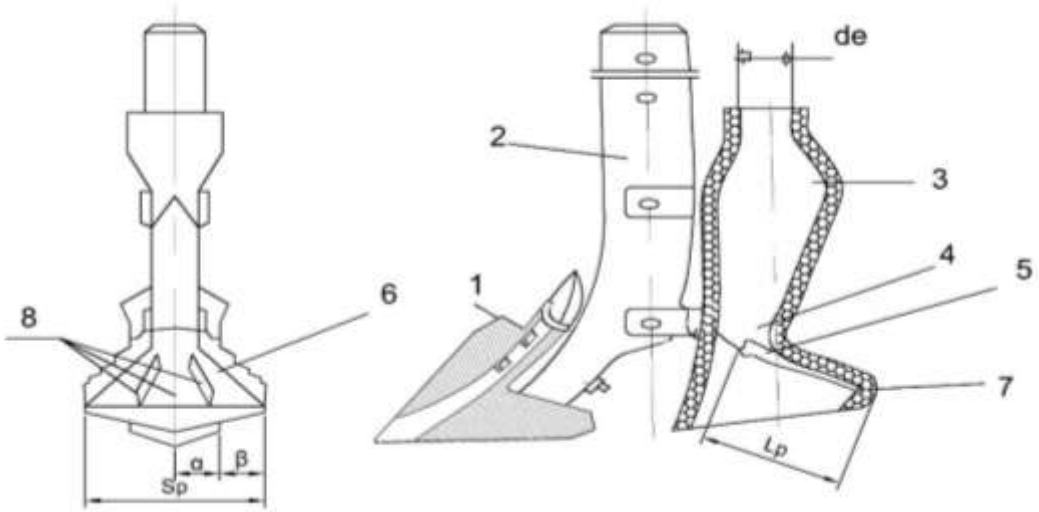

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-5

Figure 1.2. Constructive scheme of the soil fertilizer mixing opener mounted on the improved chisel-cultivator. 1 – blade, 2 – stand, 3 – conical hole, 4 – narrow hole, 5 – valve shaft, 6 – valve, 7 – diffuser

The obtained results contribute to enhancing the efficiency of agricultural machinery. Specifically:

- Accurate delivery of fertilizer to the plant root zone can increase crop yields.
- Ensuring soil crumbles with minimal energy consumption creates a favorable environment for crop growth.
- Defining the optimal coverage width of the blade improves the overall effectiveness of the equipment.

When compared with previous research, the results showed consistent values. In the future, experimental tests may be conducted, and practical implementation recommendations can be developed.

Conclusion. The optimal values for the opening angle, crumbling angle, and coverage width of the large winged blades in the fertilizer system of the chisel-cultivator have been determined. These results contribute to the improvement of agricultural machinery and enable more efficient use of water and fertilizer resources.

Based on the analysis of the work performed on optimizing the fertilization system and its parameters, the following conclusions were drawn:

- The development of plant root systems occurs not only horizontally but also vertically, adapting to the extended band-shaped fertilized layer in both directions.
- The system that applies fertilizer in two or three layers at a depth of 50 cm should only be used in fields where the gypsum layer exceeds 30 cm. This system is particularly effective for technical crops with deeply developed root systems.
- Considering that a large portion of agricultural land in the country has a gypsum layer up to 30 cm thick, and taking into account that crops in such soils develop roots around this depth, it is advisable to use a two-layer combined ridge opener system that distributes fertilizer horizontally at the designated layer.
- To ensure energy and resource efficiency, the working components of the chisel-cultivator-fertilizer should be optimally arranged, reducing the number of loosening elements and expanding the function of the ridge opener.

REFERENCES

[1]. Abdumominov I.I. (2022). Justification of the type and parameters of combined machines used for pre-sowing soil preparation. PhD Dissertation. Tashkent, p.114.

[2]. Khudoyberdiev T.S., Khudoyorov A.N., Boltaboev B.R., Razzakov B.A. (2019). Structure and operation of the ridge opener-fertilizer system. Proceedings of the international scientific-practical conference on agro-industry. Vol. 1, pp. 81–85.

[3]. Khudoyberdiev T.S., Razzakov B., Adhamov M. (2021). The technological process of the combined ridge opener-fertilizer. Agroilm Journal, No. 3, pp. 94–95.

[4]. Toshboltaev M. (Ed.) (2012). Adjustment and effective use of cotton and grain machinery. Tashkent: Fan, 214 p.

[5]. Editorial Board. (2016). Agricultural Reference Book. Tashkent: Fan va Texnologiyalar, 540 p.

[6]. Ponomaryov Mayskiy. (2017). Mechanization of Organic and Mineral Fertilizer Application. Saime, Essay 8. Certificate No. 217061500407.

[7]. Rajabov A., Toshboltaev M., To'xtaqoziyev A. (2017). Recommendations for land preparation. March 6. https://www.agro.uz/uz/

[8]. Listopad G.E. (Ed.) (1976). Agricultural and Reclamation Machines. Moscow: Kolos, 752 p.

[9]. Agrovestnik (Russia). (2017). Fertilizer Application Methods. Issue No. 7. Source: pesticidy.ru

[10]. Rudakov G.M. et al. (1981). Handbook on Cotton Mechanization. Tashkent: Uzbekistan, 238 p.

[11]. Sokolov F.A. (1977). Agronomic Foundations of Complex Mechanization in Cotton Production. Tashkent: Fan, 223 p.

[12]. Bosogo E.S. (Ed.) (1978). Theory, Design, and Calculation of Agricultural Machines. 2nd ed. Moscow: Mashinostroenie, 565 p.

[13]. Tokhtakoziev A., Toshpolatov B.U. (2013). Methods for improving the performance and energy efficiency of chisel cultivators. Collected scientific works of UzMEI. Tashkent, pp. 243–265.

[14]. Hasanov, S., Mardonov, U., Ongboyev, A., Ismatov, M. (2024). Influence of a magnetic field on HSS tool wear/life and the intensity of external machining environments in turning. International Journal of Mechatronics and Applied Mechanics. Available at https://www.scopus.com/record/display.uri?eid=2-s2.0-85197351635&origin=recordpage

[15]. Xudoynazarov D.X., Umarov U.E., Yunusova M.U., Ungboyev A.M. Theoretical and experimental determination of the dimensions of the slope and length of the feed distribution device for family livestock farms. E3S Web of Conferences 486, 02004 (2024) https://doi.org/10.1051/e3sconf/202448602004 AGRITECH-IX 2023 7 February 2024.

[16]. Mamasobirov U.M., Shoobidov Sh.A., Kovalevskiy V.I. Compensation for chain gearing errors by longitudinal modification of the sprocket teeth. https://www.scopus.com/record/display.uri?eid=2-s2.0-85112301012&origin=resultslist&sort=plf-f&src=s&sid=b3f790ead6ea7a405d890b9b66f2f4ce&sot=a&sdt=sisr&s=SOURCE-ID+%2821100831437%29&sl=23&sessionSearchId=b3f790ead6ea7a405d890b9b66f2f4ce

International Journal of Mechatronics and Applied Mechanics Volume 1, Issue 9, Pages 232 – 2382021