ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 8.848 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-4, ISSUE-12

DETERMINATION OF THE STRUCTURE PHASE OF A NEW COMPOSITE TARGET T READING

Orazbayeva Rayxan Izmuratovna

(PhD) Associate Professor, Karakalpak State University named after Berdakh, 230112 Karakalpakstan, Uzbekistan

e-mail: orazbayevarayxan2@gmail.com,

https://orcid.org/0009-0004-8027-5297

Abstract: In this article, the arrangement of yarns in tarpaulin fabric of a new composition was studied according to the theory of Professor Novikov.

Key words: tarpaulin, fabric, cotton, phase, yarn, mowing, wave, tex, twine

Аннотация: В данной статье изучено расположение нитей в брезентовой ткани нового состава по теории профессора Новикова.

Ключевые слова: брезент, ткань, хлопок, фаза, пряжа, переплетение, волна, текс, основа.

Annotatsiya: Ushbu maqola professor Novikov nazariyasiga ko'ra, yangi kompozitsiyadagi brezent matoda iplarning joylashishi o'rganildi.

Kalit so'zlar: brezent, gazlama, paxta, faza, ip, o'rim, to'lqin, teks, ip.

In order to obtain tarpaulin fabric of a new natural composition, the linear density of our threads on the body is equal to Tt=46x2 tex and Ta=39x2 tex on the warp. The width of our fabric is 160 cm and the density of the warp is 110 threads/dm. The position of the warp and weft threads in the fabric determines the phase of the thread structure. According to Professor Novikov's theory, the phases of tissue structure are between I-IX.

The wave height of the fibers in the fabric is called the bending wave height.

Bending wave height is defined as the vertical distance from the center of the thread of the uppermost thread to the center of the thread of the lowest thread. In the first phase of the fabric structure, the warp threads lie in one plane without bending, that is, the height of their bending wave is zero: $h_T = 0$. The vertical distance between the upper and lower rope threads is equal to the sum of the diameters of the body and the rope threads.

In the ninth phase of the fabric structure, on the contrary, the warp yarns lie in one plane without bending, that is, the height of their bending wave is zero: $h_A = 0$, while the warp yarns are bent to the maximum extent around the warp yarns and are located in two planes.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 8.848 / 2024

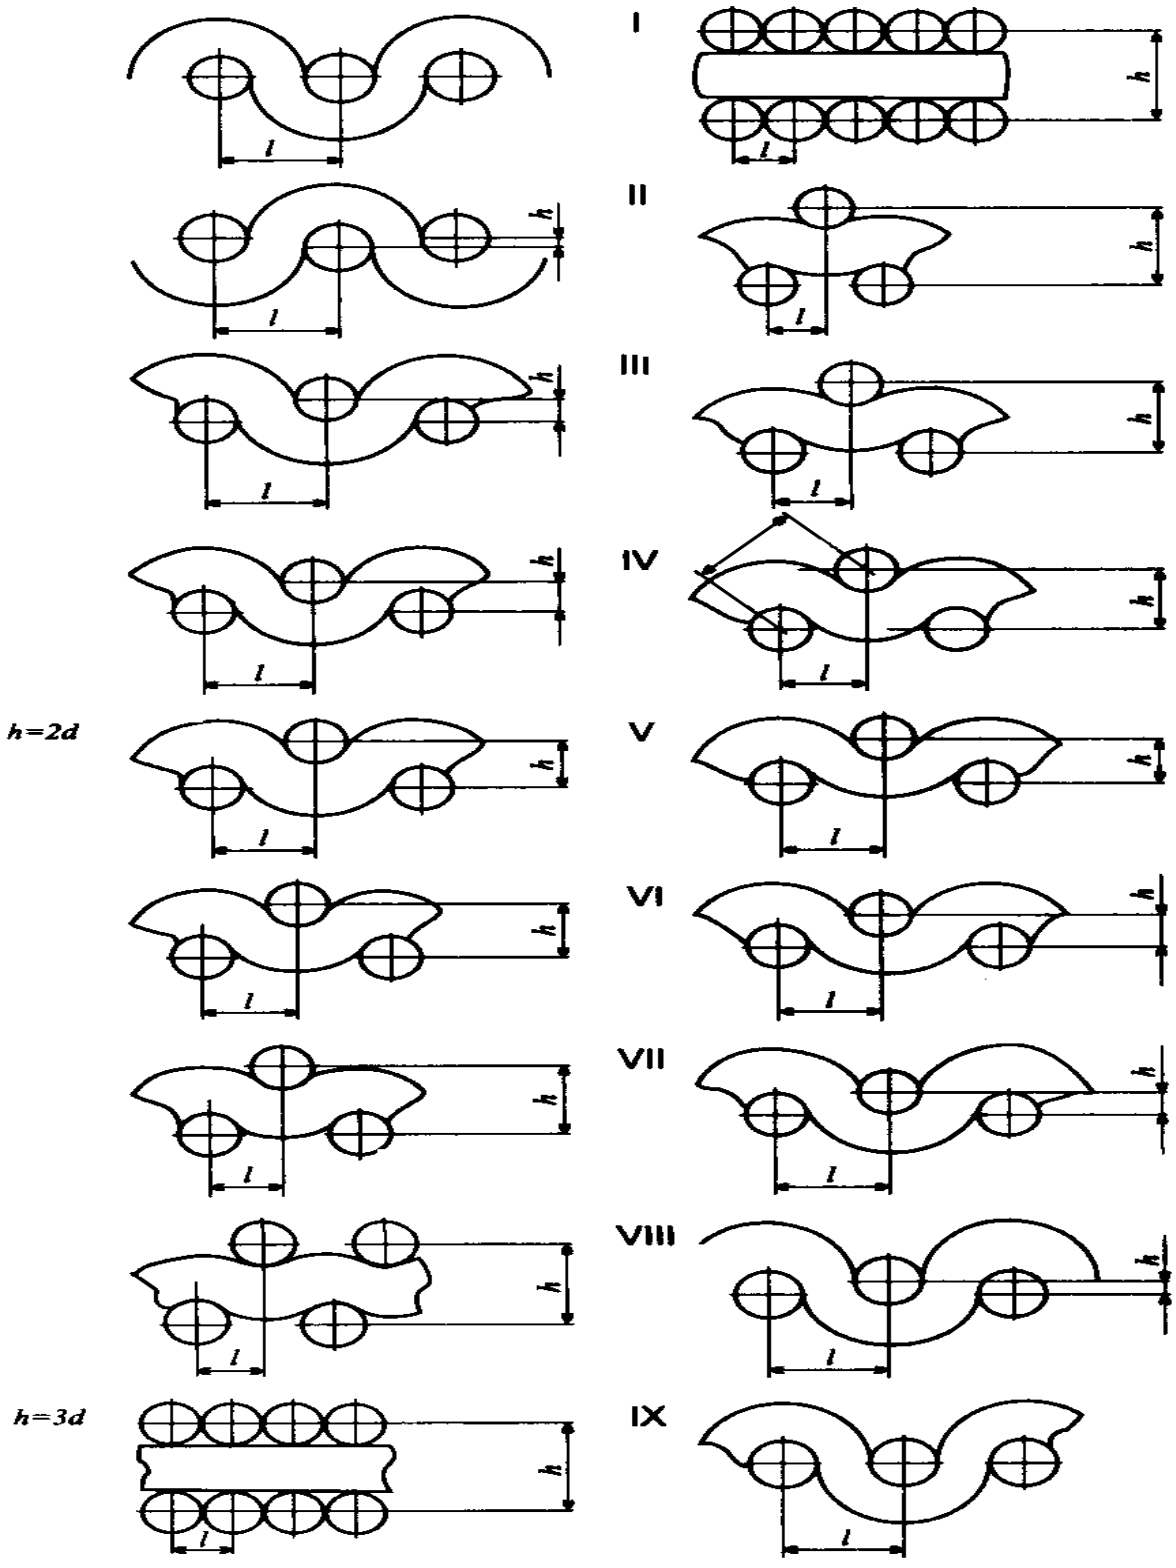


Figure 1. Tissue structure phases .

The vertical distance between the threads of the top and bottom is equal to the sum of the diameters of the threads of the top and bottom, that is, $h_{um} = d_T + d_A$.

In all other phases of the tissue structure, the warp and weft threads are slightly bent. But in all cases, regardless of the type and phase of the fabric, the sum of the bending wave heights of

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 8.848 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-4, ISSUE-12

the warp and weft yarns remains constant and is equal to the sum of the diameters of the warp and weft yarns, i.e.: $h_T + h_A = d_T + d_A = \text{const}$.

In practice, the formation of the first and ninth phases of the fabric is very complex, but theoretically such a structure is believed to exist.

The phase of tissue structure is affected by the bending stiffness of warp and weft yarns. Taking into account the uniformity of the threads, the coefficient of the structural phase of the fabric is determined using the following formula:

$$K_{\phi} = \frac{h_T}{h_{Ay}} = \frac{0{,}702}{0{,}095} = 7{,}39\,, \quad (1)$$

Here h_T, h_A are the height of the bending waves of the warp and weft yarns, respectively, in mm.

The height of the bending wave of warp and weft yarns, taking into account the uniformity of the yarns in bending, is determined as follows:

$$h_T = \frac{P_T^3 \cdot A_A \cdot (d_T + d_A)}{P_A^3 \cdot A_T + P_T^3 \cdot A_A}, = \frac{26^3 \cdot 0{,}001404 \cdot (0{,}395 + 0{,}395)}{13^3 \cdot 0{,}001404 + 26^3 \cdot 0{,}001404} = 0{,}702$$

$$h_A = \frac{P_A^3 \cdot A_T \cdot (d_T + d_A)}{P_A^3 \cdot A_T + P_T^3 \cdot A_A}. = \frac{13^3 \cdot 0{,}001404 \cdot (0{,}395 + 0{,}395)}{26^3 \cdot 0{,}001404 + 13^3 \cdot 0{,}001404} = 0{,}088$$

Based on the value of the tissue structure phase coefficient, we determine the structure phase of the tissue according to the table below.

Since the value of the coefficient is equal to 7.39, this tissue is in the eighth structural phase.

Table 1

Fabric structure phase coefficients

Ratio coefficient h_T / h_A	Fabric structure phase								
	I	II	III	IV	V	VI	VII	VIII	IX
	0/8=0	1/7=0,143	1/3=0.333	3/5=0.6	1	5/3=1.666	3/1=3	7/1=7	8/0=∞

Without taking into account the uniformity of the warp and weft threads, the height of the bending wave of the threads is determined as follows:

$$h_T = \frac{P_T \cdot (d_T + d_A)}{P_T + P_A}, = \frac{26 \cdot (0{,}395 + 0{,}395)}{26 + 13} = 0{,}527\,,$$

$$h_A = \frac{P_A \cdot (d_T + d_A)}{P_T + P_A}, = \frac{13 \cdot (0{,}395 + 0{,}395)}{26 + 13} = 0{,}263.$$

$$K_{\phi} = \frac{h_T}{h_A} = \frac{0{,}0{,}527}{0{,}263} = 2{,}00$$

From this we can conclude that this tissue is in the 6-7 phase of construction without taking into account the uniformity of the threads . Taking into account the uniformity of the threads, the fabric is in the eighth phase structure.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 8.848 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-4, ISSUE-12

REFERENCES

1. Olimboev E.Sh. « Weaving technology » Part 1. Tashkent 2008.
2. Rakhimkhodjaev S.S. « Tissues design modern methods » lecture text
3. E. Olimboev . Sh. Dovirov " Uzbekistan textile industry products and them work release technology ".
4. E. Olimboev and others «Textile structure and analysis " Analysis " publishing house Tashkent 1987
5. Orazbayeva.RI, Tureniyazova., Sh. Musirov "Quality indicators of fabrics of a mixture of different fibers" Republican scientific-practical conference on the topic "Actual problems of the development of production industries in the Republic of Karakalpakstan" Nukus. 26.04.2021. 91-93 p.
6. Sayfieva M.A. Creation of new compositions based on artistic decoration in the weaving method. Diss....techn. science. nom. -Tashkent: TTESI. 2009.-112b.
7. Orazbayeva .RI, ABJoldasova., G.Baymuratova. Effect of fiber composition on the quality indicators of shirt fabrics "Actual problems of the development of production industries in the Republic of Karakalpakstan" Republican scientific and practical conference. Defect. 26.04.2021. 86-88 p.
8. A. Kutepov "Stroenie i proektirovanie tkaney" Moscow 1987 г.
9. E. Sh. Olimboev and others « Weaving technology and equipment » Tashkent 1987
10. S.D. Nikolaev and dr. "Theory of processes, technology and oborudovanie tkatskogo proizvodstva" Moscow Legprombytizdat 1995 г.
11. E. Sh. Olimboyev and others " The gasses structure and analysis ", Tashkent, 2003.