ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-4

IN URBAN RESIDENTIAL AREAS FROM BUILDINGS BEING LOST HEAT ENERGY ORIENTATION ACCORDING TO SAVING ISSUES

Dusatov BE

Tashkent University of Architecture and Civil Engineering

Abstract: *In the article Uzbekistan Republic of Prospects for reducing greenhouse gases by 2030, energy consumption of buildings in urban residential areas, and the reduction of heat energy lost from buildings orientation according to saving , as well as residential area in the section heat energy expense and greenhouse gases amount determined .*

Support Keywords: *Energy consumption, heat loss, histogram, constructions thermal resistance, orientation.*

Uzbekistan signed the Paris Agreement on April 19, 2016, and ratified it on November 21, 2018. Uzbekistan has the following tasks under the Paris Agreement [6]:

1. Reducing the impact of climate change Uzbekistan has committed to reducing greenhouse gas emissions into the atmosphere by 35% per unit of gross domestic product (GDP) of the economy by 2030 compared to 2010.
2. Effective management of natural resources The Paris Agreement has identified the efficient use of water and land resources, the introduction of renewable energy sources, and increasing energy efficiency as priorities.
3. Implementation of programs aimed at modernizing the energy sector of Uzbekistan by expanding investments in renewable energy sources, including solar and wind energy, and introducing new technologies.
4. Adaptation strategies Uzbekistan is paying special attention to climate change adaptation projects in the fields of agriculture, water management, and environmental protection. This aims to mitigate the impact of climate change and protect the population from its consequences.

In order to consider the prospects for implementing the above , we will consider Uzbekistan's gross domestic product (GDP) growth for the period from 2010 to 2023 and forecasts for 2030.

In 2010, Uzbekistan's GDP was 39.3 billion US dollars, and *in 2021,* GDP is expected to grow by 7% [7, 8].

2023 GDP will grow by 6% to $90.8 billion by 2024 The Central Bank has set a GDP growth forecast for 2024 at 5.7–6.2% [9, 10].

in 2026 is expected to be no less than 6%, and economic growth forecasts have been developed to achieve the goals 1, 11].

As mentioned above, Uzbekistan has committed to reducing greenhouse gas emissions by 35% by 2030 compared to 2010 levels, and the graph of GDP and greenhouse gas reductions by 2030 is presented in detail in Figure 1.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-4


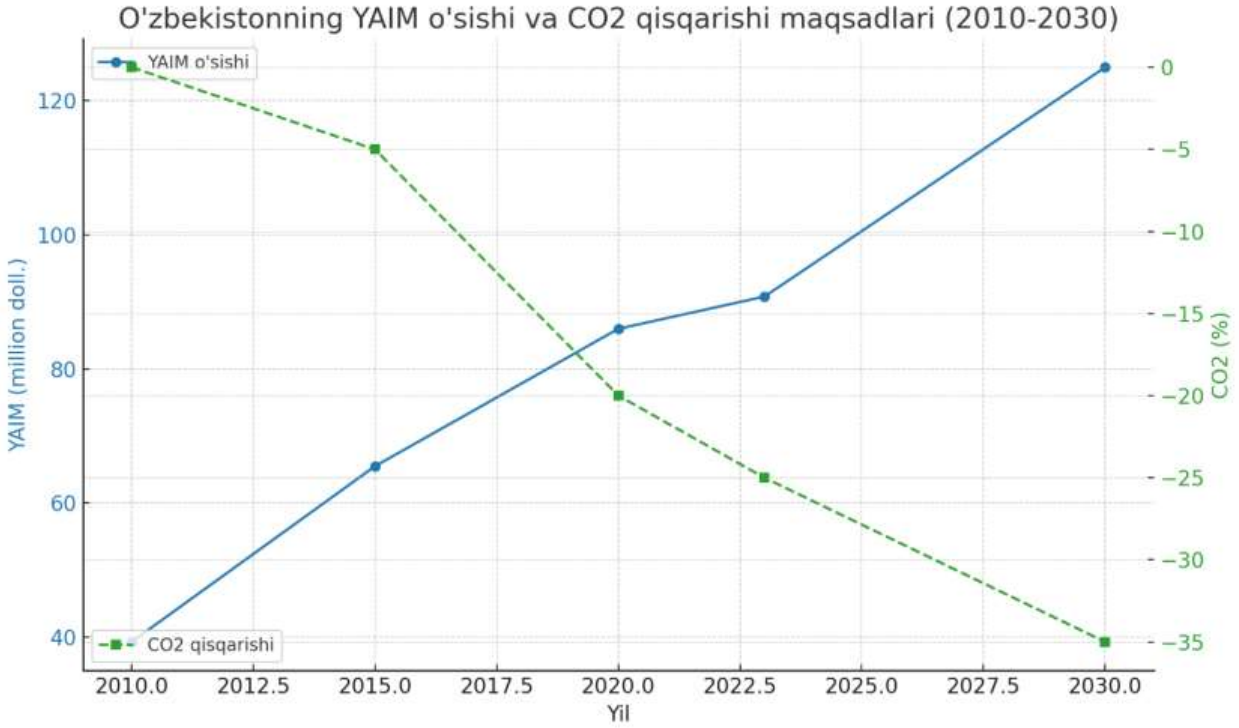


Figure 1. Uzbekistan's GDP growth and SO $_2$ reduction prospects from 2010 to 2030

According to the forecast, GDP growth by 2030 is expected to be approximately $125.0 billion, resulting in a 35% C O $_2$ reduction.

In the buildings of houses 16, 22, 23, 25 and 17, 21, 24 and 26 of the residential area 15 , located on Foziltepa Street, Uchtepa district, Tashkent city. Conducted on January 20, 2023. The outdoor air temperature at the time of the study ranged from +1° C to +1.5° C , cloudy, and the views of the objects from all four sides were measured using thermal imagers, and the following results were obtained.


The results for house 16 in district 15, Foziltepa Street are as follows:

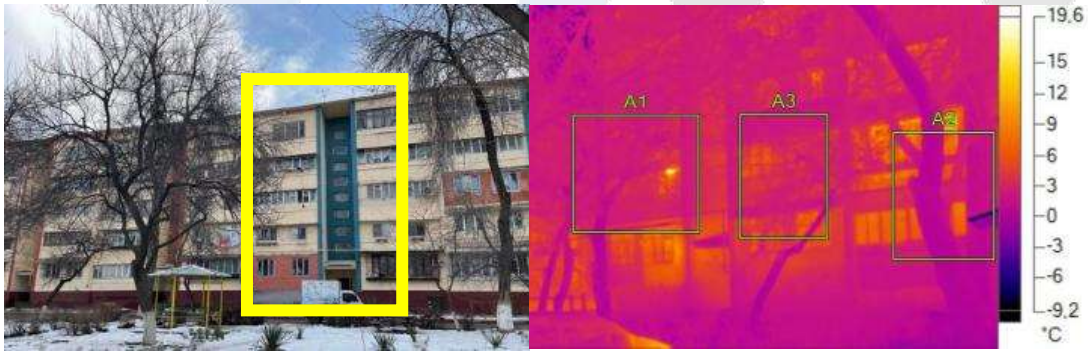

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-4

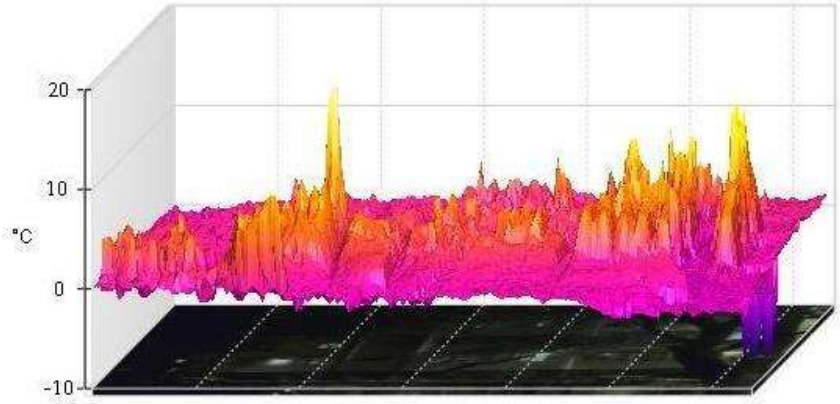

The graph shows the rate of heat loss from the element under study.

2. Foziltepa Street, 16, from the north-west side Thermal imaging indicator and histogram of the style

The measurement zones and the obtained values in the north-west direction are presented in Figure 2 and Table 1 .


Table 1

The results for 17 in house

Zones	Average temperature	Minimum	Maximum	Radiation coefficient	Background
A1	2.3°C	-4.3°C	24.0°C	0.92	22.0°C
A2	1.3°C	-6.9°C	10.5°C	0.92	22.0°C
A3	1.2°C	-1.7°C	9.0°C	0.92	22.0°C

Foziltepa Street, District 15 are as follows:



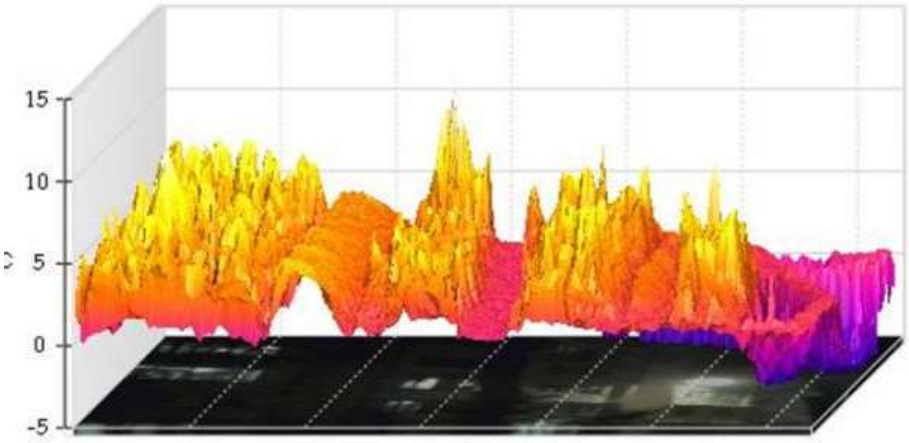

The graph shows the rate of heat loss from the element under study.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY


VOLUME-5, ISSUE-4


Figure 2. Foziltepa Street, 17, from the west (segment 1) Histogram taken by a thermal imager

The measurement zones and the obtained values for the western side (segment 1) are presented in Figures 2-3 and Table 2 .

Table 2

Zones	Average temperature	Minimum	Maximum	Radiation coefficient	Background
A1	2.7°C	0.3°C	10.4°C	0.92	22.0°C
A2	-0.4°C	-7.3°C	9.5°C	0.92	22.0°C
A3	2.3°C	-0.7°C	7.0°C	0.92	22.0°C

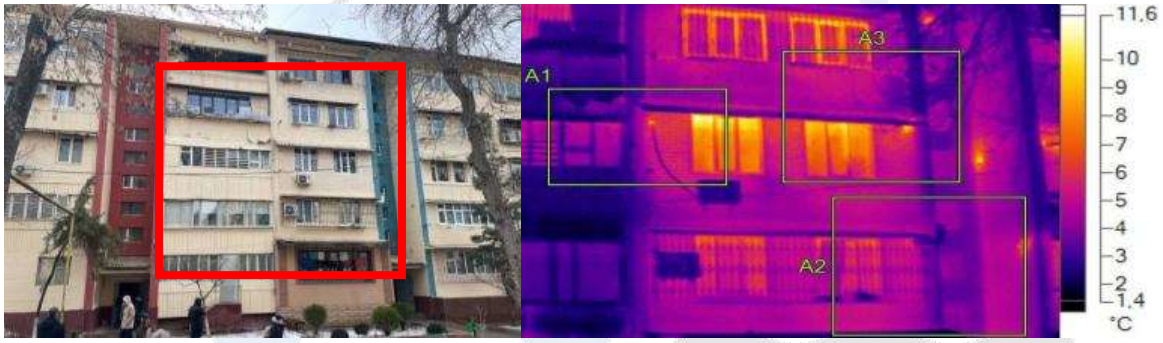

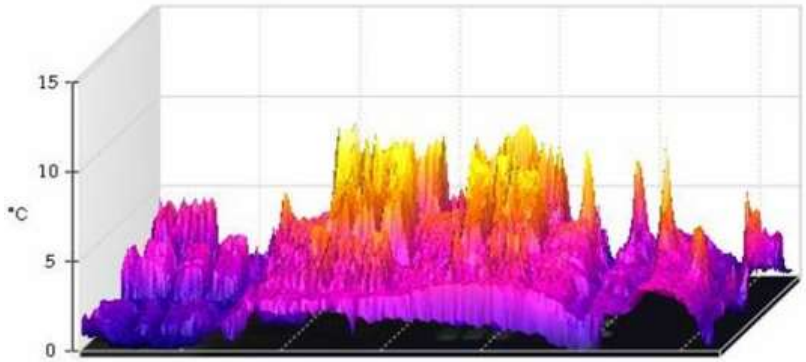

The graph shows the rate of heat loss from the element under study.

Figure 3. West side of house 17, Foziltepa Street Histogram taken by a thermal imager

Research **results** and t_t according to the results of the temperature field calculation, the external τ_{mesh} and internal τ_{ground} surfaces of the barrier structure The average temperatures, ° C , are determined and the heat flux **is expressed in terms** of W/ m2 , as follows (1) is calculated by the formula.

$$q^{his} = a_i (t_i - t_{io'r}) = a_t (t_{tor} - t_t), \quad (1)$$

here:

α_i – heat transfer coefficient of the inner surface of the enclosing structures , according to Table 5 of SHNQ 2.01.04 is taken [3];

t_i – calculated temperature of the internal air;

t_t – calculated winter temperature of the outside air, equal to the average temperature of the coldest five days, with a coefficient of 0.92, provided for in ShNQ 2.01.01-22 [2] ;

α_t – heat transfer coefficient of the outer surface of the enclosing structures, according to Table 6 of SHNQ 2.01.04 is obtained [3] .

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-4

The temperature of the inner surface of the barrier structure τ_i, °C, (in the absence of heat-conducting inserts), i.e., using a thermal imager, was determined from the following formula (2):

$$t_i = t_i - n \cdot (t_i - t_t) / R_{um} / a_i, \quad (2)$$

n – blocker coefficient obtained according to Table 3 of SHNQ 2.01.04 depending on the position of the external surface of the structures relative to the outside air [3];

t_i – calculated temperature of the internal air;

t_t – calculated winter temperature of the outside air, equal to the average temperature of the coldest five days, with a coefficient of 0.92, provided for in ShNQ 2.01.01-22 [2] ;

α_i – heat transfer coefficient of the inner surface of the enclosing structures , according to Table 5 of SHNQ 2.01.04 is taken [3];

Rum – (3) as in the formula.

The temperature of the inner surface of external barrier wall structures is one of the main characteristics characterizing the thermal protection performance in ensuring sanitary and hygienic conditions inside the room.

Also, in ensuring energy efficiency, the air temperature on the outer surface of external barrier wall structures serves as a key indicator for determining heat flux.

The results of KFFokin's research on determining the thermal resistance and heat flow of external barrier wall structures are unparalleled.

In particular, based on the scientific and practical research conducted by K.F. Fokin, in the 1972 book "Construction Thermal Engineering of Enclosing Parts of Buildings", the following formulas were studied in detail and presented [5].

Heat transfer resistance by KFFokin R_{um} The formula m ^{2o}C /W (3) is interpreted as follows.

It is noteworthy that the following formula (5) is similar to the above formula (3).

$$R_{um} = R_i + R_k + R_t, \quad (3)$$

here:

R_i – resistance to heat transfer from the internal air temperature to the internal surface of the barrier structure, this resistance is called the heat transfer resistance and indicates the difference in temperature loss $t_i - \tau_t$;

R_k – thermal resistance of structures, m $^2 \cdot$ °C /W;

R_t The resistance to heat transfer from the barrier structure to the outside air temperature, this resistance is called the heat transfer resistance and indicates the difference in temperature loss $\tau_t - t_t$.

According to the test results, the average $\tau_t$temperature difference between the outer $\Delta\tau$ and inner surfaces of the external barrier wall structure is given $\tau_i$by ℃, and is determined as follows.

$$\Delta\tau = \tau_i - \tau_t \quad (4)$$

Q leaving the external barrier wall structure is determined by the following formula (5).

$$Q = k \cdot (t_i - t_t) \cdot F \cdot z, \quad (5)$$

Here:

k – the heat transfer coefficient of the external barrier wall structure is equal to u λ/δ or $1/R_K$ W/m ^{2} ℃, also this indicator is called *u-value according to foreign technical standards* ;

t_i – outside air temperature °C ;

t_t – indoor air temperature °C ;

F – surface area of the barrier structure m ^{2} ;

z – duration of heat flow in hours.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

VOLUME-5, ISSUE-4

Current heat consumption Q_{um}^{I} Before determining , it is advisable to determine the normative costs, which are determined using the following formula.

$$Q_{um}^{I} = Q_{dv} + Q_T + Q_E + Q_{dr} + Q_{h.a.}\,, \qquad (6)$$

Here:

Q $_{dv}$ – heat energy lost from the wall structure , W/m ^{2} ;

Q $_p$ – heat energy lost from the floor structure , W/m ^{2} ;

Q $_t$ – heat energy lost from the roof structure , W/m ^{2} ;

Q $_e$ – heat energy lost through the door , W/m ^{2} ;

Q $_{dr}$ – heat energy lost through the window , W/m ^{2} ;

Q $_{ha}$ – heat energy lost from air exchange, W/m ^{2} .

In this case, Q $_{\text{is determined by}}$ the following formula (7) .

$$Q_{h.a.} = \frac{A_p \cdot V \cdot z \cdot h \cdot \mathrm{N_q}}{R_{h.a.}}, \qquad (7)$$

Here:

A $_p$ – floor area m ^{2} ;

V – volume of air exchanged S H NQ 2.08.01-24 is taken according to Table 10 of the 4 m ^{3} /h per 1 m ^{2} floor surface [4] ;

z – heating season ;

h – the number of hours in a day, i.e. 24 hours;

H $_q$ is the number of floors of the building.

R $_{yes}$ – S H is taken in accordance with NQ 2.01.04-18 air resistance m ^{2} · ^{o}C /W.

$$Q_{h.a.} = \frac{A_p \cdot V \cdot z \cdot h \cdot \mathrm{N_q}}{R_{h.a.}} = \frac{1509{,}7 \cdot 4 \cdot 129 \cdot 24 \cdot 5}{0{,}15} = 623\,228{,}9 \text{ kW/m}^3 \text{ years}\,.$$

Current The amount of heat consumption will be as follows.

$Q_{um}^{I} = 131\,987{,}3 + 158\,288{,}5 + 22\,728{,}6 + 39\,222{,}7 + 37\,588{,}4 + +623\,228{,}9 =$
1 013 044,66 kW/ ^{m2} .


The amount of heat loss from the research objects was determined using the above formula. The results are presented in Table 3.


Based on the overall dimensions of the research objects, the total heat consumption was determined according to the type of construction by the levels of thermal protection in accordance with QMQ 2.01.04:

Those of houses 16, 22, 23, 25 facing southeast are shown in Figure 4;

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

VOLUME-5, ISSUE-4

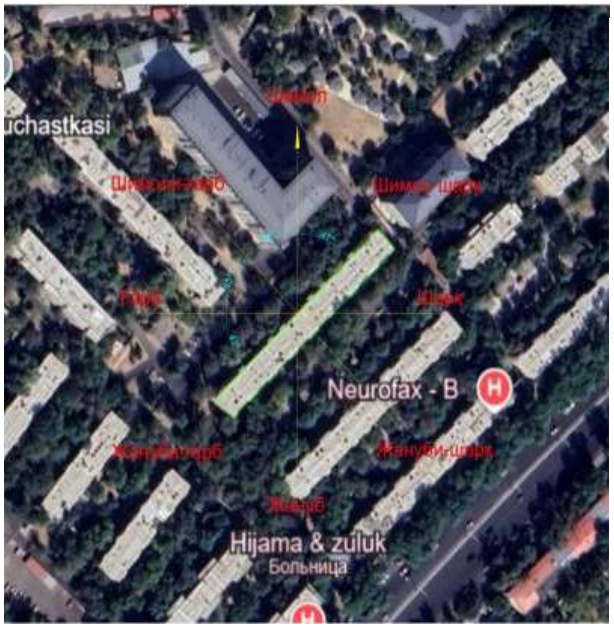

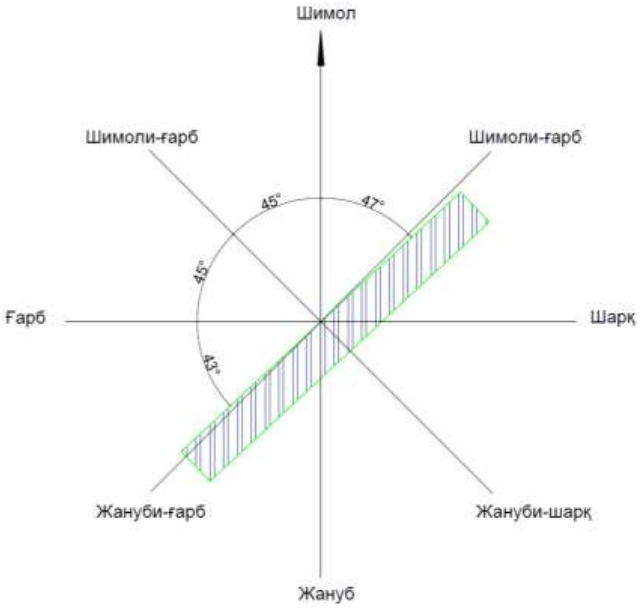

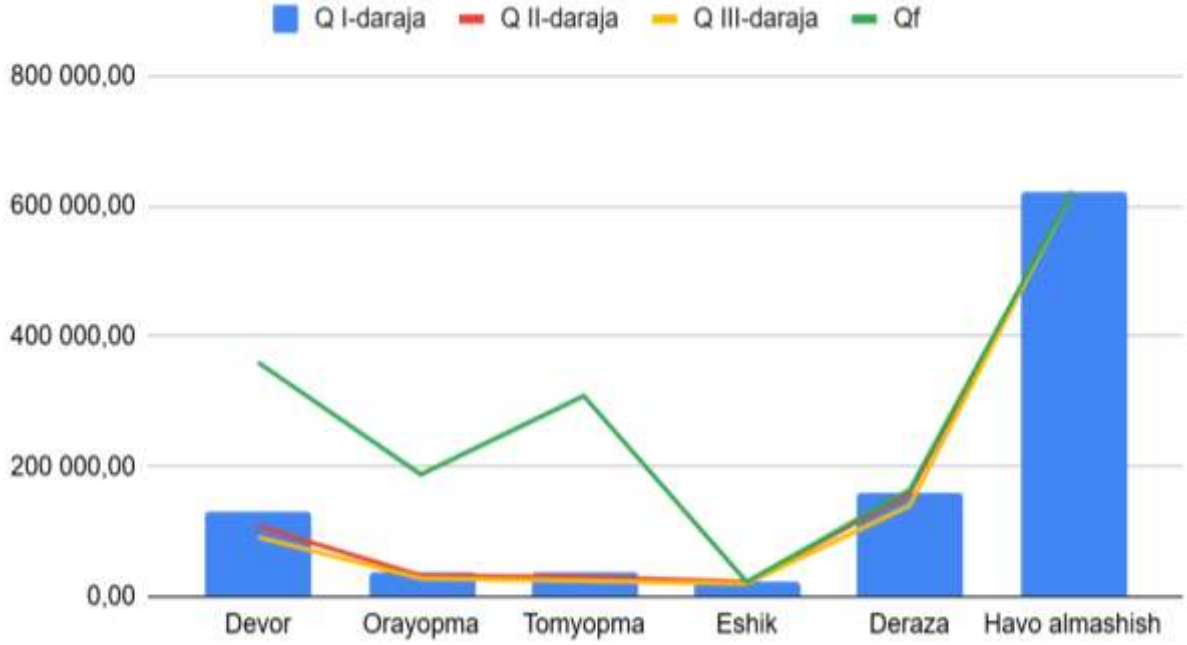


Figure 4. Differences in actual heat consumption and thermal insulation of houses 16, 22, 23, 25 facing southeast


Those of houses 17, 21, 24, and 26 facing northeast are shown in Figure 5;


ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-4



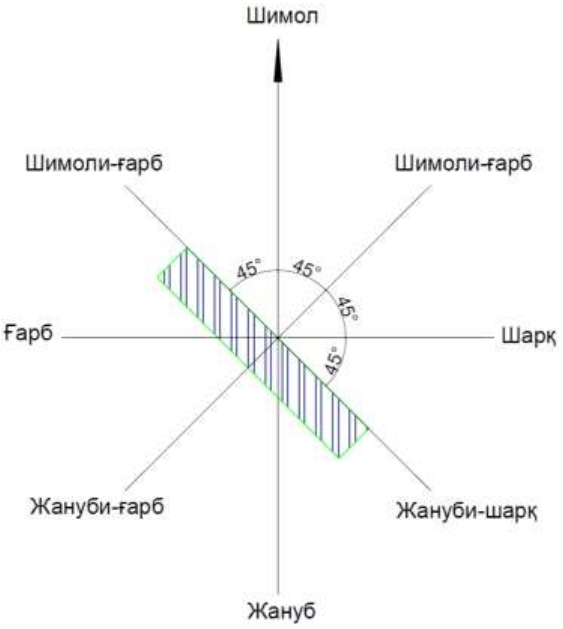

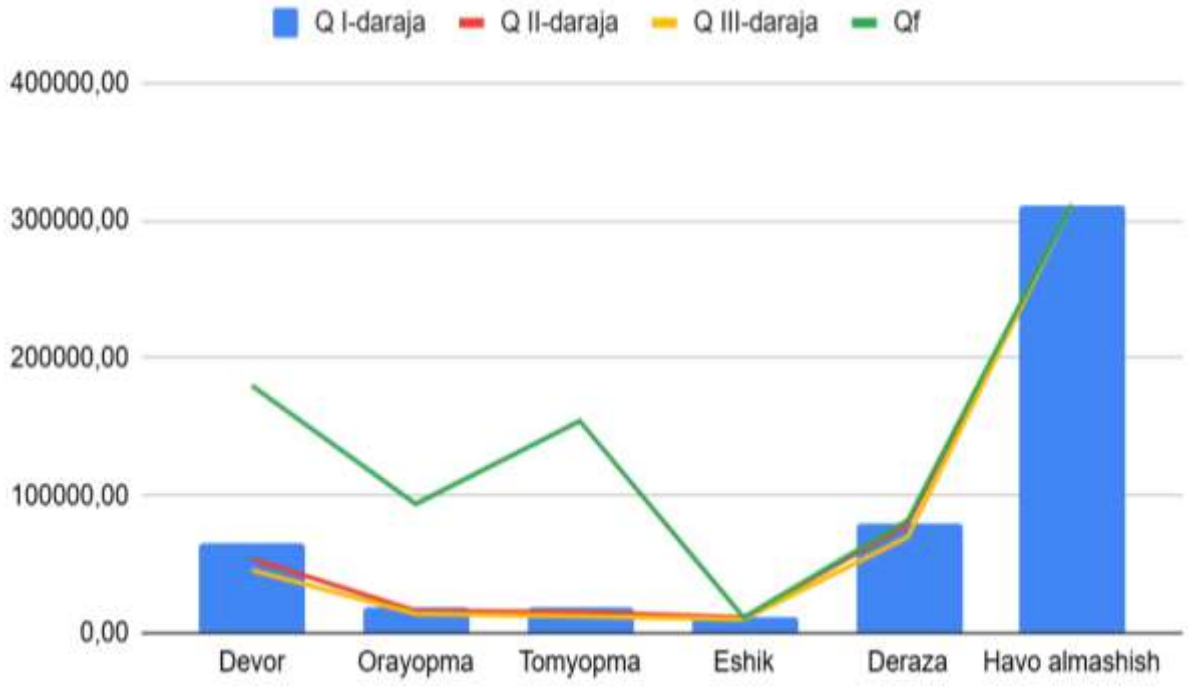

Differences in actual heat consumption and heat protection for houses 17, 21, 24, and 26 facing northeast

Detailed values of the results obtained from the research objects are presented in Table 3 below.

In practice, it can be seen that with an annual heat consumption of 1 million 665 thousand 771 kW/m^2, it is possible to achieve a saving of 42 % by ensuring the second level of thermal protection, that is, 974 thousand 525 kW/m ^{2} (details are given in Table 3).

Table 3

Calculations of total annual heat consumption Q_{I}, Q_{II}, Q_{III}, and Q^{f} *by levels of thermal protection*

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-4

Positioning towards the horizon	Wall	Window	Door	Oraopma	Tomyopma	Air exchange.	Total annual expenditure
	Total annual heat consumption Q_{I} kW/m ^{2} year					Q_{yes} kW/m ^{3} years	$Q^{I}_{um.}$ kW/m ^{2}
Houses 16, 22, 23, 25 to the southeast	131,987.3	158 288.5	22,728.6	39,222.7	37,588.4	623 228.93	**1,013,044.66**
	Total annual heat consumption Q_{II} kW/m ^{2} year						$Q^{II}_{um.}$ kW/m ^{2}
	107,989.61	158 288.55	22,728.61	32,218.71	30,070.8		**974,525.20**
	Total annual heat consumption Q_{III} kW/m ^{2} year						$Q^{III}_{um.}$ kW/m ^{2}
	91,375.82	139,821.55	20,076.94	28 191.37	24,381.7		**927,076.34**
	Total annual heat consumption Q_{f} kW/m ^{2} year						$Q^{f}_{um.}$ kW/m ^{2}
	359,841.31	164,029.58	22,728.61	187,757.61	308 185.5		**1,665,771.51**
Houses 17, 21, 24, 26 to the northeast	**Total annual heat consumption Q_{I} kW/m ^{2} year**					Q_{yes} kW/m ^{3} years	$Q^{I}_{um.}$ kW/m ^{2}
	65993.65	79144.27	11364.31	19611.39	18794.2	311,614.46	**506 522.33**
	Total annual heat consumption Q_{II} kW/m ^{2} year						$Q^{II}_{um.}$ kW/m ^{2}
	53994.80	79144.27	11364.31	16109.35	15035.4		**487 262.60**
	Total annual heat consumption Q_{III} kW/m ^{2} year						$Q^{III}_{um.}$ kW/m ^{2}
	45687.91	69910.78	10038.47	14095.69	12190.9		**463,538.17**
	Total annual heat consumption Q_{f} kW/m ^{2} year						$Q^{f}_{um.}$ kW/m ^{2}
	179920.65	82014.79	11364.31	93878.80	154092.7		**832,885.76**
The calculations were made for 1 dwelling, not for the total number of houses.							

In this case, 1 m ^{2} The amount of heat consumed for the floor surface is determined according to formula (8).

$$Q_p = \frac{Q^f_{um.}}{(A_p \cdot H_q)}, \quad (8)$$

Here:

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-4

$Q^{f}_{um.}$ – actual total heat consumption kW/ ^{m2} ;

A_p – floor area m^2 ;

H_q is the number of floors of the building.

1 m^2 for the research object The surface will be as follows.

$$Q_p = \frac{Q^{f}_{um.}}{(A_p \cdot H_q)} = \frac{1665771,51}{1509,7 \cdot 5} = 220,7 \ \frac{kW}{m^2}$$

Based on the total area of residential buildings in the research object, the heat consumption per area is calculated using the following formula (9).

$$Q_h = A^{h}_{um} \cdot Q_p, \qquad (9)$$

Here:

A^{h}_{um} – total floor area of multi-apartment buildings in a residential area, m^2 ;

In this ,

$$A^{h}_{um} = A_p n , \qquad (10)$$

A_p – floor area m^2 ;

n – number of multi -apartment houses;

Q_p – 1 m^2 in formula (8) above The amount of heat consumed per floor surface is kW/m^2 .

$$Q_h = A^{h}_{um} \cdot Q_p = 45291 \cdot 220,7 = 9\,995\,723,7 \text{ kW}$$

Therefore, 9,995.72 MW of thermal energy is consumed by the research object per year , and as a result, it is necessary to calculate the amount of natural gas consumed to produce this energy . 1 m^3 of natural gas The specific heat of combustion for 41 MDj/kg is 11.38 kW h. constitutes.

The actual heat consumption is 9,995,723.7 kW /11.38 kW h = 878 358.85 m^3 or 878.36 thousand m ^{3} We will determine the amount of greenhouse gases emitted from this thermal energy of 9,995,723.7 kW , where 1 kWh = 0.68 kg C O_2 , resulting in 6,797.09 tons of C O_2 being emitted into the atmosphere (details are given in Table 4).

Table 4:

Natural gas and greenhouse gas savings in residential areas

Conditional unit	**Levels of thermal protection**			**Practical thermal energy consumption**
	$Q^{I}_{h.}$ kW/m^2	$Q^{II}_{h.}$ kW/m^2	$Q^{III}_{h.}$ kW/m^2	$Q^{f}_{h.}$ kW/m^2
	6,078,267.94	5,847,151.21	5,562,458.03	**9,995,723.7**
$Q^{f}_{h.f.}$ kW/m^2 to difference *(abbreviation)*	**3,916,361.14**	**4,147,477.88**	**4,432,171.06**	
Natural gas thousand m^3	534.1 2	513.8 1	488.79	**878.36**
$Q^{f}_{h.f.}$ kW/m^2 to difference *(abbreviation)*	**344.14**	**364.45**	**389.47**	
Greenhouse gases SO_2 tons	4133.2 2	3976.06	3782.47	**6,797.09**

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-4

$Q^{f}_{h.f.}$ kW/m ^{2} to difference *(abbreviation)*	**2663.12**	**2820.28**	**3013.87**	

CONCLUSION

It is clear that determining the optimal level of thermal protection is important.
The research object consumes 9,995.72 MW of thermal energy per year , as a result of which it is necessary to calculate the amount of natural gas consumed to produce this energy. 1 m ^{3} of natural gas The specific heat of combustion for 41 MDj/kg is 11.38 kW h. constitutes.

The actual heat consumption is 9,995,723.7 kW /11.38 kW h = 878 358.85 m ^{3} or 878.36 thousand m ^{3} We will determine the amount of greenhouse gases emitted from this thermal energy of 9,995,723.7 kW , where 1 kWh = 0.68 kg C O $_2$, resulting in 6,797.09 tons of C O $_2$ being released into the atmosphere .

REFERENCES USED

1. Strategy of the President of the Republic of Uzbekistan " Uzbekistan - 2030" dated 11.09.2023 Decree No. PF-158 "On " (https://lex.uz/ru/docs/-6600413) .
2. S H NQ 2.01.01-22 “Climatic and physical-geological data for design” / Ministry of Construction and Housing and Communal Services – Tashkent, 2022-43 pp.
3. KMF 2.01.04-18 “Construction Thermal Engineering” / Ministry of Construction of the Republic of Uzbekistan – Tashkent, 2018-105 pages.
4. SHNQ 2.08.01-24 “Design of residential facilities” Order of the Minister of Construction and Housing and Communal Services No. 01/2-57 dated 14.08.2024 (https://lex.uz/docs/-7121730).
5. Fokin K.F. "Stroitelnaya teplotekhnika ograjdayushchikh chastei zdaniy" M.: Stroyizdat, 1973, — 287 p., il.; izdanie 4-e, pererabotannoe i dopolnennoe.
6. https://www.undp.org/sites/g/files/zskgke326/files/2024-12/ozbekiston_respublikasining_milliy_mikkyosda_beligilaanjang_hissa_mmbh_2_prorayoni_boyicha_baholash_hisoboti_0.pdf .
7. https://daryo.uz/k/2024/07/26/mustaqilikka-erishgandan-song-kazakhistan-va-uzbekistan-kayosiy-lili-sining-yaim-osishining .
8. https://bugun.uz/ozbekiston-2021-yilda-yaim-osishi-7-foizda-bolishinye-kutuktukta .
9. https://www.gazeta.uz/oz/2024/01/20/gdp .
10. https://cbu.uz/oz/press_center/releases/1801325 .
11. https://bugun.uz/uzbekistan-2021-yilda-yaim-osishi-7-foizda-bolishinye-kutumakta?utm_source=chatgpt.com