ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-5


IMPROVEMENT OF THE BREEDING PROCESS OF CORN

Kiyamov Asror Ziyadullaevich –
Associate Professor of Karshi State University
Badalov Sunatullo Mamadievich –
Associate Professor of Karshi State University

Abstract. We will review the technical means of mechanization not by the conventional stages of the selection process, but by the main technological processes. This approach seems more logical to us, since some machines can be used at both stages of the selection process.
Keywords. Grain, corn, combine, row spacing, experimental field, plot**.**

Introduction. In stabilizing the gross grain harvest as a whole, an important role is given to increasing the production of corn grain, as one of the main sources of replenishment of the feed base of livestock. In modern economic and environmental conditions, an increase in the production of corn grain cannot be achieved only by expanding the sowing area. In addition, there are no reserves in increasing the intensification of agriculture, since the environmental situation is already tense. A way out of this situation may be the use of technologies based on energy conservation, biologization and optimization of plant growing. An essential element of these technologies is the use of breeding achievements.

Main part. Preparation of the experimental field. The row spacing for sowing nurseries of both stages is 0.7 m. The seed placement depth varies in the range of 0.04…0.10 m. Currently, due to the lack of domestically produced seeding machines, sowing of the first stage nurseries is carried out by manual seeders of the SSG-1 type. Therefore, the field prepared for laying out the first stage nurseries must be marked with a marker in two mutually perpendicular directions. As a result of this operation, the field is divided by furrows into squares of 0.7Ч0.7 m. Sowing is carried out at the intersections of the furrows (at the corners of the square). Currently, the planting of the first stage nurseries is carried out by various modifications of the SSG-1 manual seeder - Figure 1.1 [105**]**.

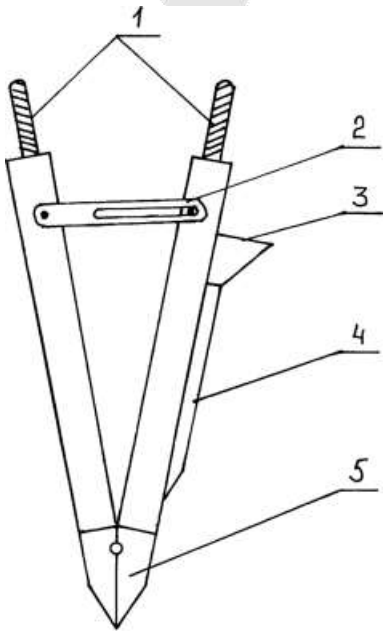

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-5

Figure 1.1 - Corn seeder selection SSG-1
1 - handles; 2 - limiter; 3 - seed funnel;
4 - seed tube; 5 - coulter.

In order for a seed drill for the first stage to be in demand by breeders, it must meet the following requirements: 1 - the seed placement depth must be regulated in the range from 0.04 to 0.12 m; 2 - 3-4 seeds must be sown in one nest; 3 - the machine must be single-row and self-propelled. At present, technical solutions have not yet been found that meet not only the above requirements, but are also economically feasible. As for nurseries of the second conditional stage of the breeding process, the seed sowing process is completely mechanized here. One of the largest manufacturers of breeding and seed-growing equipment, the Austrian company Wintersteiger (until the 90s called F. Walter & H. Wintersteiger) produces a number of corn seed drills. Dinamic Disc is a seed drill with a pneumatic seeding unit operating on a vacuum [Wint website]. The seeding element is a radial groove disc and a spiral disc with slots. With the help of a vacuum, the seeds stick to the central part of the disc. When the disc is turned, the seeds move along the slot outward and are sown in the optimal position. The seeder is equipped with an electronic global control system (GSC) of all functions, including documentation of the number of seeds sown in a separate plot. The seeder can be produced in various designs - from two- to eight-row. Mainly in a mounted version, but there is also a four-row trailed version of the seeder. Monoseed DT is a mounted four-row seeder of a modular design for point sowing of corn, soybeans and sunflower. The seeding unit (classic discs with holes) operates on a vacuum. The seeder is also equipped with an electronic system (GSC).

– Kirovograd JSC "Red Star" (Ukraine) produces a six-row mounted seeder SKS-6 with a pneumatic sowing unit operating on air vacuum for sowing seeds at the second stage of selection and hybridization sites [106]. The seeding rate is 2.2 ... 8.3 pcs. per 1 m. Cassette seed filling. The operating speed of the seeder varies in the range from 2.8 to 5.1 km / h. The total number of skips and doubles can reach 8.5%. Service personnel - a tractor driver and an operator.

– The sowing unit is universal: by changing the tips in accordance with the size and shape of the seeds, it can be used to sow seeds of various crops - corn, wheat, peas, etc. The sowing unit is driven by the support and drive wheels of the seeder, and the fan - by the PTO of the tractor. In addition to pneumatic seeding units, corn seeders also use a seeding unit designed by Oyjord. It is a smooth cone equipped with a shell at its bottom. Radial partitions are attached to the wall of the shell, dividing the space between the base of the cone and the wall into cells. The cone and shell are mounted on a rotating disk with an outlet for seeds. Seeds from the loading hopper or cassette are fed to the top of the cone and are evenly distributed over its entire surface and fall into the cells. When the disk rotates, the seeds enter the seed tube through the outlet and then into the coulter. This device ensures uniform seeding and is well cleaned. **Conclusion**. Based on the analysis of seeding machines, the following conclusions can be made: - three main types of seeding devices are used for selection seeders (in order of preference): 1 - pneumatic, operating on excess air pressure; 2 - pneumatic, operating on a vacuum; 3 - device designed by Ojord;

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

VOLUME-5, ISSUE-5

LITERATURE

1. Rokhlin A. S. New selection seeders / A. S. Rokhlin, H. D. Kuyts // Mechanization and electrification of agriculture.
- 1985. - No. 5. - P. 57-59.
2. The system of machines for complex mechanization of agricultural production for 1986-1995: Part 1. - Plant growing. - Moscow: AgroNIITEITO, 1988. - 958 p.
3. Plot-Aeromat // Prospectus of the company F. Walter & H. Wintersteiger. - 4 p. (German)
4. Plotspider // Prospectus of the company Wintersteiger. - 4 p. (German)
5. Machines for harvesting and post-harvest processing of corn / E. I. Trubilin [et al.]. - Krasnodar: KGAU, 2000. - 35 p.