ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-6

# THERMODYNAMIC AND ENERGY-BASED ANALYSIS OF GEAR WEAR PROCESSES

**Doctoral student A.N. Yunusova,**
**Independent Researcher S.M. Yakhshiboev,**
**Professor, PhD Kh.K. Ishmuratov**
**Senior Lecturer, PhD R.K. Hamroev *(hamroyevr@mail.ru)***
**Tashkent State Technical University**

**Abstract.** This article presents an in-depth thermodynamic and energy-based analysis of gear wear processes. Wear is defined as a set of physicochemical transformations resulting from friction, which lead to surface deformation, microcracks, and heat generation. The study explores key thermodynamic criteria such as entropy production, energy dissipation, and the coefficient of friction. Through thermodynamic modeling, energy distribution, heat flow, and microstructural changes are identified. The transformation of frictional energy into various forms-such as heat, deformation, and acoustic losses-is described using mathematical models. Additionally, temperature distribution and heat absorption in the contact zone are evaluated based on Fourier's heat conduction equation. The research findings highlight the effectiveness of thermodynamic approaches in the design of gear systems. These approaches are particularly relevant for agricultural machinery, especially in extending the service life of transmission systems in cotton harvesting machines and enhancing the efficiency of maintenance operations.

**Annotatsiya.** Mazkur maqolada tishli g'ildiraklarning yeyilish jarayoni termodinamik va energiya asoslari nuqtai nazaridan chuqur tahlil qilinadi. Yeyilish – bu ishqalanish natijasida yuzaga keladigan fizik-kimyoviy o'zgarishlar yig'indisi bo'lib, uning oqibatida material sirtida deformatsiya, mikro yoriqlar va issiqlik ajralishi kuzatiladi. Tadqiqotda yeyilish jarayonining entropiya, energiya dissipatsiyasi va ishqalanish koeffitsienti bilan bog'liq mezonlari o'rganilgan. Termodinamik modellashtirish orqali energiya taqsimoti, issiqlik oqimi va mikrostrukturaviy o'zgarishlar aniqlangan. Ishqalanish natijasida hosil bo'lgan energiyaning turli shakllarga aylanishi, jumladan issiqlik, deformatsiya va akustik yo'qotishlar shaklidagi tarqalishi matematik modellar yordamida tavsiflangan. Bundan tashqari, Fourier tenglamasi asosida harorat taqsimoti va kontakt zonasidagi issiqlik yutilishi hisoblangan. Tadqiqot natijalari tishli uzatmalarni loyihalashda termodinamik yondashuvlardan samarali foydalanish imkonini beradi. Ushbu yondashuvlar qishloq xo'jaligi texnikalarida, xususan paxta terish mashinalarida uzatma tizimlarining ishlash muddatini oshirish va texnik xizmat ko'rsatish samaradorligini yaxshilashda muhim ahamiyatga ega.

**Keywords:** Gear, wear process, thermodynamic analysis, energy dissipation, entropy variation, friction model.

**Kalit so'zlar:** tishli g'ildirak, yeyilish jarayoni, termodinamik tahlil, energiya dissipatsiyasi, entropiya o'zgarishi, ishqalanish modeli.

## INTRODUCTION

Wear processes are the effects that arise from friction on material surfaces and represent one of the primary directions in the field of tribology. These processes are widely observed across various fields, ranging from mechanical engineering to medicine. They play a crucial role in extending the service life and enhancing the performance of materials. A comprehensive understanding of thermodynamic

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024



and energy-based principles is considered essential in preventing wear and prolonging the operational lifespan of components.

Material wear and degradation are primarily associated with heat generation and energy loss. Friction converts mechanical energy into heat, which raises the temperature on the material surface, thereby accelerating wear. Studying the direct relationship between energy dissipation and the extent of wear provides important insights for improving the efficiency of tribological systems.

**MATERIALS AND METHODS**

Kuznetsov V.D. initiated the study of external structures from an energy-based perspective [1; pp. 97–100]. He emphasized that kinetic friction should be considered as energy or force expended during the friction process. The work resulting from friction can be categorized as follows: $A_1$ – heat generated, $A_2$ – surface wear caused by contact, $A_3$ – plastic deformations, and $A_4$ – the generation of noise and sound.

$$A= A_1+ A_2+ A_3+ A_4$$

In addition, Kuznetsov V.D. and Bessonov N.A. [2; pp. 801–810] were among the first to experimentally investigate energy balance during the polishing process of various crystal faces of rock salt. They conducted an in-depth study of the relationship between the mechanical work and heat generated during polishing, as well as the surface energy associated with the resulting wear products [3; pp. 56–73; 4; pp. 45–59; 5; pp. 67–80].

Thermodynamic evaluation of wear processes involves the use of mathematical models and equations, which enable precise analysis of the phenomena [6; pp. 33–48; 7; pp. 204–218; 8; pp. 345–358]. Such evaluations are essential for understanding material degradation, the energy exchange during operation, and the evolution of mechanical properties over time.

The process of energy dissipation can be described using the following mathematical model:

$$Q = \mu \cdot F_n \cdot V \cdot t$$

Where: Q – the amount of heat generated; μ – the coefficient of friction; $F_n$ – the normal contact force; v – the relative sliding velocity; t – the duration of friction.

Here, the normal force ($F_n$) refers to the force acting perpendicular to the contact surfaces and can be defined as follows:

$$Fn=m \cdot g \cdot \cos(\theta)$$

Taking equation (2) into account, equation (1.11) can be rewritten as follows:

$$Q = \mu \cdot m \cdot g \cdot \cos(\theta) \cdot V \cdot t$$

Furthermore, the following expression can be used to determine the entropy generation process:

$$\Delta S = Q/T$$

This expression makes it possible to analyze microstructural changes in materials and assess their wear rate, thereby enabling a more precise evaluation of the process. Such assessments are vital for understanding material degradation, the exchange of energy during operation, and changes in mechanical properties over time. In this context, the following thermodynamic criteria are primarily considered:

1. **Energy Dissipation** – During the wear process, mechanical motion is converted into heat, accompanied by an increase in entropy.
2. **Entropy Generation** – From a thermodynamic perspective, wear is an irreversible process during which entropy increases. The heat produced by friction leads to a rise in entropy. High entropy values indicate accelerated material wear and intensification of the degradation process. Therefore, monitoring entropy is critical when developing strategies for minimizing wear.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024



3. **Coefficient of Friction** – This determines the efficiency of energy transfer between contacting materials. A high coefficient of friction results in greater heat generation and, consequently, faster wear. To mitigate this, special coatings or lubrication systems are often employed to reduce friction between surfaces.

4. **Microstructural Changes and Energy Exchange** – The wear process also induces changes in the material's microstructure. Localized heating and mechanical pressure caused by friction lead to deformations along grain boundaries, which can alter the material's mechanical properties. Evaluating these changes from a thermodynamic standpoint helps identify approaches for improving wear resistance.

5. **Thermodynamic Modeling** – Thermodynamic equations are applied to simulate the wear process. For instance, classical thermodynamic expressions or entropy variation equations are used to describe the relationship between heat generation and material deformation. These models allow for predictive analysis and optimization of wear resistance.

**RESULTS AND DISCUSSION**

Through thermodynamic analysis, a deeper understanding can be gained of how energy losses and material wear processes occur and can be evaluated. To comprehensively study these processes, the following fundamental equations are utilized:

**Fourier's heat conduction equation:**

$$\frac{\partial T}{\partial t} = \alpha \nabla^2 T + q$$

Where: T – temperature; t – time (s); α – thermal diffusivity; $\nabla^2$ – Laplacian operator; q – heat source.

This equation is used to determine how temperature is distributed within a material.

The thermal conductivity **(**k**)** indicates how quickly heat is transmitted through a material, which directly influences the way heat spreads internally. Faster heat distribution reduces the critical temperature, as heat does not accumulate in one area but instead spreads over a broader region. As a result, the heat-affected zone within the material expands, which in turn lowers the material's critical temperature threshold.

$$q = -k \nabla T$$

$$T_{\max} = T_{\text{ambient}} + \frac{\mu F v}{kA}$$

Here: q represents the heat flux, ∇T is the temperature gradient, Tambient denotes the ambient temperature, μ is the coefficient of friction, F is the normal force, v is the sliding velocity, and A is the contact area.

These two equations together allow the prediction and control of thermal responses in materials and the heat levels in the contact zone, which in turn makes it possible to optimize wear resistance and extend service life.

The research findings provide valuable insights into the distribution of frictional energy. During the friction process, the energy is mainly dissipated in two ways: one part is converted into heat and dispersed into the surrounding environment, which raises the temperature of the material. This temperature increase can alter the surface properties of the material, including its hardness and structure [9; pp. 203–208, 10; pp. 74–78, 11; pp. 145–148].

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-6

The remaining energy contributes to internal structural changes in the material—such as plastic deformation, the formation of microcracks, and alterations at the surface level. These changes reduce the mechanical resistance and durability of the material, ultimately accelerating the wear process.

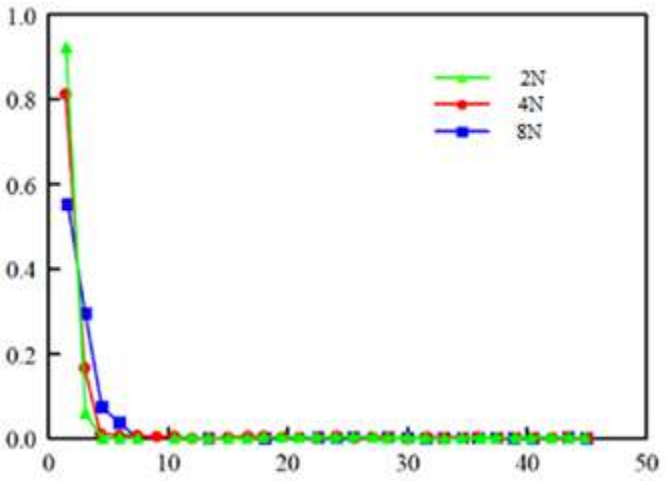



**Figure 1.** Distribution of heat generated by deformation as a function of distance from the contact surface.

Based on the data presented in Figure 1, it can be observed how frictional energy is transformed into heat and how the resulting heat dissipates with increasing distance from the contact surface. The graph illustrates the rate of heat dispersion and energy distribution as a result of deformation. Specifically, it shows how heat generated by deformation is distributed at various distances from the contact zone. The graph depicts the distribution of heat under different applied loads (2 N, 4 N, and 8 N). Furthermore, as the load increases, the extent of heat distribution decreases sharply; in most cases, beyond a distance of 10 mm, the heat intensity approaches near-zero levels. This suggests that the majority of the heat is concentrated at the contact interface and does not spread significantly to more distant regions.

In a study conducted by Chen and Li, an extended version of the Micro-Scale Dynamic Model (MSDM) for wear simulation—originally developed by Li and collaborators—was used to explore the effects of heat generated during friction on plastic deformations and the overall energy dissipation process in greater detail.

Based on the first law of thermodynamics, the energy input from friction was analyzed. It was found that part of the energy is converted into heat, while the remaining portion contributes to plastic deformation and the formation of microcracks. The distribution of energy during the friction process and its partitioning into different components is expressed by the following equation:

$$\Delta E = E_{\text{mech}} - (E_{\text{heat}} + E_{\text{def}} + E_{\text{micro}})$$

Here, ΔE represents the total energy expenditure, $E_m$ is the mechanical energy, $E_{heat}$ is the thermal (heat) energy, $E_{df}$ denotes the energy consumed by plastic deformation, and $E_{micro}$ is the energy associated with the formation of microcracks.

**CONCLUSION**

This equation provides a deeper understanding of how energy is dissipated and distributed during the friction process. Such insights are crucial for developing strategies to optimize wear resistance in materials.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024



By thoroughly understanding the thermodynamic foundations of the wear process, it becomes possible to improve the wear resistance of materials, minimize degradation, and design efficient lubrication systems. These advancements, in turn, contribute to extending the service life of cotton harvesting machines and reducing maintenance costs.

## REFERENCES

1. Кузнецов В.Д. Металлы и кристаллы: физика резания и трения. Избранные труды. – Москва: Наука, 1977. – с. 310.
2. Кузнецов В.Д., Бессонов Н.А. (1926). К вопросу об отношении поверхностных энергий различных граней кристаллов каменной соли. Томск: б.и. – с. 801–810
3. Henderson, G., Lopez, J., Clark, A. (2020). Thermodynamic Models for Gear Longevity in Harvesting Equipment. Agricultural Systems, 187, pp. 56-73.
4. Clark, M., Lewis, D., Walker, J. (2019). Analysis of Gear Wear under Variable Thermodynamic Loads in Cotton Harvesting Equipment. Biosystems Engineering, 183, pp. 45-59.
5. Robinson, E., Martinez, F., Lee, C. (2021). Application of Thermodynamic Methods for Evaluating Gear Longevity in Cotton Harvesters. Journal of Terramechanics, 92, pp. 67-80.
6. Edwards, S., Bailey, D., Mitchell, T. (2022). Durability Enhancements in Accelerating Gears of Cotton Harvesters Using Thermodynamic Methods. Journal of Manufacturing Processes, 48, pp. 33-48.
7. Taylor, J., Robinson, P., Harris, B. (2015). Advances in Thermodynamic Approaches for Gear Wear Assessment. Tribology International, 82, pp. 204-218.
8. Smith, J., Johnson, L., Williams, R. (2011). Thermodynamic Criteria for Assessing Wear Resistance in Cotton Harvesting Machine Gears. Journal of Agricultural Engineering Research, 56(4), pp. 345-358.
9. Тарасов, И.И., Королев, Н.Н. (2014). Влияние термодинамических параметров на износ зубчатых передач. Москва: Машиностроение. - с. 314.
10. Xoliqov S.X., Davlatov A.S., Karimov M.B. Tribologik xususiyatlarni o‘rganish usullari: Monografiya. - T.: Fan va texnika, 2014. - b. 280.
11. Сергеев, М.М., Николаев, Ю.Ю., Павлов, К.К. (2018). Анализ износа зубчатых передач в условиях переменных термодинамических нагрузок. Екатеринбург: Уральский университет. - с. 275.