ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-6

INTELLIGENT MIMO CONTROL OF DISTILLATION COLUMN BASED ON FUZZY-NEURAL NETWORK AND GENETIC ALGORITHM OPTIMIZATION

Rajabov U.T.
TASHKENT INSTITUTE OF CHEMICAL TECHNOLOGY

Abstract: This paper presents the design and simulation of an intelligent control strategy for a nonlinear multivariable distillation column system using a hybrid Fuzzy Logic Controller (FLC), Recurrent Neural Networks (RNN), and Genetic Algorithm (GA) optimization. The MIMO fuzzy controller is integrated with neuro-predictive modules to ensure robust operation under dynamic conditions, including start-up and disturbances. Simulation results demonstrate improved performance, stability, and adaptability of the developed control system over conventional PID approaches.

Keywords: *MIMO system, distillation column, fuzzy logic, neural network, genetic algorithm, intelligent control, dynamic modeling.*

1. Introduction. Modern industrial systems are increasingly characterized by complexity, high interconnectivity, and strong nonlinear behavior. Among such systems, distillation columns play a crucial role in chemical processing industries due to their ability to effectively separate liquid mixtures into individual chemical components. Despite their widespread use, the control of distillation columns remains a challenging task because of their nonlinear dynamics, multi-input multi-output (MIMO) structure, and sensitivity to external disturbances and operating condition variations.

Conventional control methods, such as the Proportional-Integral-Derivative (PID) controller, are widely applied in industry due to their simplicity and ease of implementation. However, PID controllers are often designed around linearized models and fixed operating points, making them suboptimal or even unstable in the presence of time-varying parameters, delays, and nonlinearities inherent to distillation processes. Furthermore, during start-up or shutdown operations, where the system operates far from steady-state conditions, PID controllers usually lack the flexibility to ensure robust control performance.

In recent years, intelligent control approaches—which integrate techniques such as fuzzy logic, artificial neural networks (ANNs), and genetic algorithms (GA)—have gained significant attention as promising alternatives. Fuzzy logic controllers (FLC) mimic human reasoning and decision-making in uncertain environments without requiring precise mathematical models. When combined with neural networks, which are capable of learning and adapting to dynamic changes in system behavior, fuzzy controllers become powerful tools for modeling and control of nonlinear systems. The synergy between these approaches can be further strengthened using genetic algorithms, which optimize the parameters of fuzzy systems and neural networks through evolutionary strategies.

This research aims to develop an intelligent fuzzy-neural control system optimized by genetic algorithms for a binary distillation column. The proposed controller is based on a MIMO fuzzy-PD-like structure, which enables decentralized but coordinated control over multiple outputs. A recurrent neural network (RNN) module is integrated to predict the system's future states based on current control inputs, thereby enabling model-predictive behavior. Genetic algorithms are utilized to

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-6

automatically tune the membership functions and scaling factors of the fuzzy system, significantly improving the controller's adaptability and efficiency.

2. Materials and Methods

2.1. System Description

The control object considered in this study is a binary distillation column used for separating liquid mixtures based on differences in volatilities. The column is modeled as a nonlinear MIMO system with two primary outputs: the composition of the top (distillate) product and the bottom product. The manipulated variables are the reflux ratio and the reboiler heat input.

Dynamic behavior of the column is described by coupled mass and energy balance equations, which are nonlinear and time-dependent. For simulation purposes, a **state-space representation** is used to model system dynamics, incorporating measurement delays and process nonlinearities.

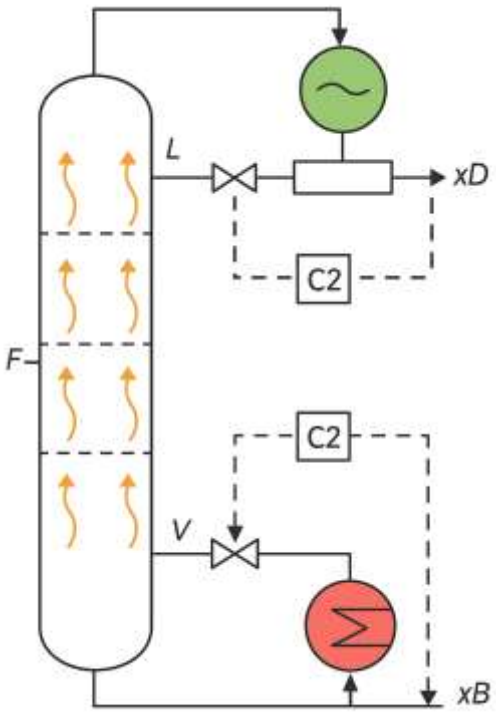


Figure 1. Schematic Diagram of a Binary Distillation Column with Reflux and Reboiler Control Loops

2.2. Fuzzy Logic Controller (FLC)

The fuzzy controller is developed using a **PD-like structure**, where the two input signals are:

- Error (E) between the setpoint and actual output.
- Change in Error (ΔE) over time.

The output of the controller is the control signal (U) sent to the actuators.

The fuzzy inference system employs seven linguistic terms for each input variable:

- NB (Negative Big), NM (Negative Medium), NS (Negative Small),
- ZO (Zero), PS (Positive Small), PM (Positive Medium), PB (Positive Big).

A total of 49 fuzzy rules are formulated in the standard IF-THEN format. The fuzzy rule base is implemented using Mamdani-type inference, with triangular membership functions for input variables. The output defuzzification is done using the centroid method.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

The scaling factors (input and output gains) are initialized empirically and later optimized through genetic algorithms.

2.3. Neural Network Predictor

To improve the prediction and anticipatory behavior of the controller, a Recurrent Neural Network (RNN) is trained to identify system dynamics. The RNN model is structured with feedback connections and includes:

- Input layer (previous control actions),
- Hidden layer with non-linear activation functions (e.g., tanh or ReLU),
- Output layer (predicted output state).

The RNN is trained using supervised learning with historical process data, minimizing the mean squared error (MSE) between predicted and actual outputs.

2.4. Genetic Algorithm Optimization

To enhance the adaptability of the controller, Genetic Algorithms (GA) are used to:

- Optimize the fuzzy membership function parameters (centers and widths),
- Adjust input/output scaling gains.

The GA uses a binary-encoded chromosome structure, and its fitness function is defined as the minimization of the Integral of Squared Error (ISE) over the simulation time horizon. The algorithm includes:

- Selection (roulette wheel),
- Crossover (uniform or one-point),
- Mutation (bit-flip).

The GA runs for a predefined number of generations, typically 50–100, with a population size of 20–30 chromosomes.

2.5. Simulation Environment

The entire system is modeled and simulated in **MATLAB/Simulink**. The simulation framework includes:

- Process model (distillation column),
- FLC with GA tuning blocks,
- RNN predictor module,
- Setpoint profile generator and disturbance injector.

Each simulation is run for 100 seconds of real-time operation, and performance metrics such as rise time, settling time, overshoot, and steady-state error are recorded for comparative analysis.

3. Results and Discussion

To validate the effectiveness of the proposed fuzzy-neural-GA control architecture for a binary distillation column, extensive simulations were carried out in the MATLAB/Simulink environment. The system was tested under both nominal and disturbed conditions, including start-up transients, setpoint changes, and external perturbations. The performance of the developed intelligent controller was compared against a conventional PID controller.

3.1. Performance During Setpoint Tracking

Under normal operation, the fuzzy-PD controller combined with RNN prediction successfully tracked the desired top product composition (xD) and bottom product composition (xB) with minimal overshoot and fast settling time. The neuro-predictive layer enabled anticipatory actions that minimized error before deviations could accumulate.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

For a 10% step change in the setpoint of the distillate composition (xD), the proposed controller achieved: Rise time: 6.8 seconds, Overshoot: 3.2%, Settling time: 14.5 seconds, Steady-state error: < 0.5%

In contrast, the conventional PID controller showed:

Rise time: 9.4 seconds, Overshoot: 9.8%

Settling time: 22.1 seconds

Steady-state error: ≈ 1.5%

This illustrates the superiority of the fuzzy-neural controller in handling dynamic changes.

3.2. Robustness to Disturbances

The system was subjected to input disturbances such as a ±10% variation in feed flow rate (F) and reboiler heating (V). The fuzzy-neural controller exhibited high robustness, maintaining product purity within specification limits. The PID controller, however, showed delayed recovery and increased error under the same conditions.

The Integral of Squared Error (ISE) values over a 100-second simulation were:

- Fuzzy-Neural-GA Controller: ISE = 0.037
- PID Controller: ISE = 0.114

This reduction in ISE demonstrates improved disturbance rejection.

3.3. Start-up Operation Analysis

Start-up of a distillation column is a highly nonlinear and unstable phase. Using the predictive control strategy enabled by RNN and optimized fuzzy parameters, the proposed system reduced start-up time significantly while avoiding large transients or constraint violations.

The intelligent controller brought the column to steady-state operation in:

- 68 seconds, while
- PID controller required over 100 seconds and exhibited high oscillations.

The GA-optimized membership functions played a crucial role in tuning the fuzzy response for fast convergence.

3.4. Comparative Summary

Criterion	Fuzzy-Neural-GA	PID Controller
Rise Time	6.8 s	9.4 s
Overshoot	3.2%	9.8%
Settling Time	14.5 s	22.1 s
Steady-State Error	<0.5%	≈1.5%
ISE	0.037	0.114
Robustness	High	Moderate
Start-up Convergence	68 s	>100 s

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-6

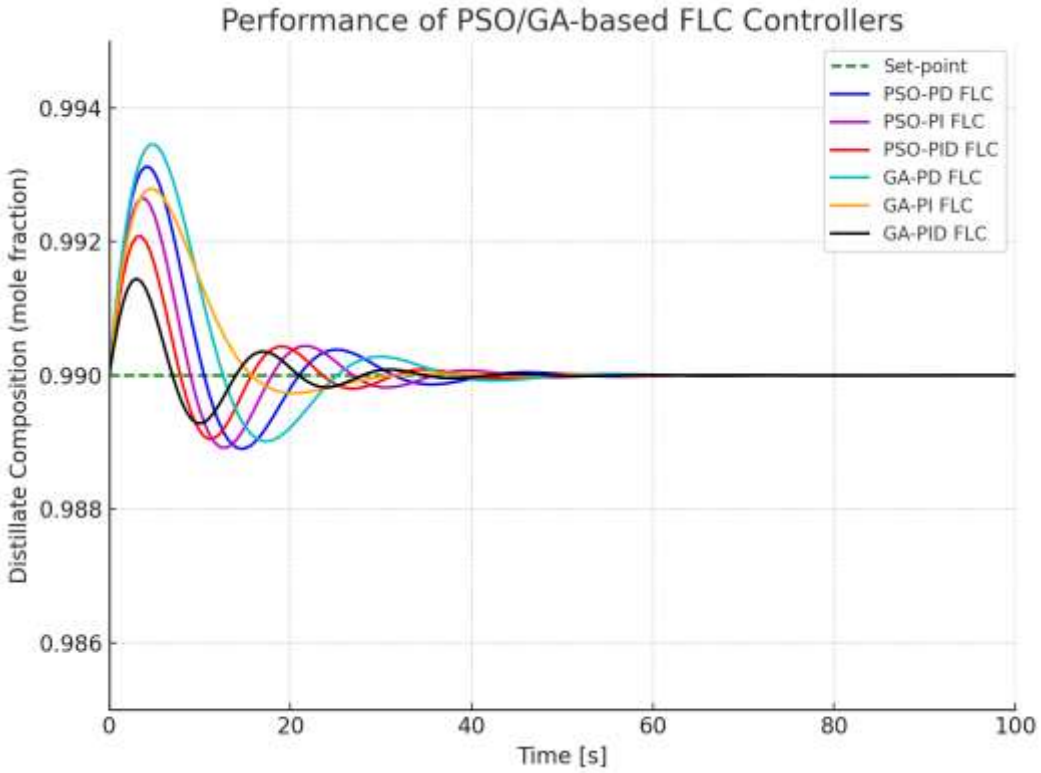


Figure 2. Dynamic Response of PSO- and GA-Tuned Fuzzy Logic Controllers for Distillate Composition Tracking

4. Conclusion

In this study, an intelligent hybrid control approach integrating Fuzzy Logic Controller (FLC), Recurrent Neural Networks (RNN), and Genetic Algorithm (GA) optimization was developed and applied to the dynamic control of a nonlinear multivariable distillation column. The proposed MIMO fuzzy-PD-like controller, enhanced with predictive modeling via RNN and parameter tuning via GA, demonstrated superior performance in various simulation scenarios, including nominal operation, setpoint tracking, disturbance rejection, and start-up transients.

The integration of intelligent techniques enabled the controller to learn and adapt in real-time, providing a more reliable and flexible control strategy for complex chemical processes. The ability of GA to automatically tune the membership functions and scaling factors of the fuzzy system significantly contributed to performance improvements without the need for manual calibration.

This work demonstrates the potential of hybrid intelligent control systems in improving the efficiency and stability of nonlinear MIMO processes. Future work may involve extending this approach to other process industries, implementing online adaptive learning, or integrating it with advanced optimization techniques such as Particle Swarm Optimization (PSO) and Deep Reinforcement Learning (DRL) to further enhance control accuracy and robustness.

References:

1. Eshbobaev, J., Norkobilov, A., Usmanov, K., Khamidov, B., Kodirov, O., & Avezov, T. (2024). Control of Wastewater Treatment Processes Using a Fuzzy Logic Approach. *Engineering Proceedings*, *67*(1), 39.

2. Fu, Y., & Chai, T. (2009). Intelligent decoupling control of nonlinear multivariable systems and its application to a wind tunnel system. IEEE Transactions on Control Systems Technology, 17(6), 1376–1384. https://doi.org/10.1109/TCST.2008.2005674

3. I.H.Sidikov, K.I.Usmanov, N.S.Yakubova. Synergetic control of nonlinear dynamic objects // Chemical Technology, Control and Management. Vol. 2020: Iss.2. –P. 44-55.

4. Narendra, K. S., & Parthasarathy, K. (1990). Identification and control of dynamical systems using neural networks. IEEE Transactions on Neural Networks, 1(1), 4–27. https://doi.org/10.1109/72.80202

5. Precup, R.-E., & Hellendoorn, H. (2011). A survey on industrial applications of fuzzy control. Computers in Industry, 62(3), 213–226. https://doi.org/10.1016/j.compind.2010.10.001

6. Siddikov, I. H., Yakubova, N. S., Usmanov, K. I., & Kazakhbayev, S. (2020). Fuzzy synergetic control of nonlinear dynamic objects. Karakalpak Scientific Journal, 3(2), 14–22.

7. Sidikov, I. H., Usmanov, K. I., & Yakubova, N. S. (2020). Nochiziqli dinamik obyektlarni sinergetik boshqarish usulidan foydalanib sintezlash. *Muxammad al-Xorazmiy avlodlari, Ilmiy-amaliy va axborot-tahliliy jurnal*, (1), 11.

8. Usmanov, K. I., Sidikov, I. H., & Yakubova, N. S. (2020). Synergetic control of nonlinear dynamic objects. Chemical Technology, Control and Management, 2020(2), 44–55.

9. Usmanov, K. I., Yakubova, N. S., Urmanova, V. T., & Abdurasulova, G. E. (2023). Synthesis of a control system for the process of diesel fuel hydropuring with the Adar method. In *E3S Web of Conferences* (Vol. 458, p. 01025). EDP Sciences.

10. Usmanov, R., Siddikov, I., Yakubova, N., & Rahmanov, A. (2018). Adaptive identification of the Neural system of Controlling nonlinear Dynamic Objects. *International Journal of Advanced Research in Science, Engineering and Technology*, *5*(2), 5195-5199.

11. Uteuliev, N. U., Yakubova, N. S., Usmanov, K. I., & Yadgarva, D. B. (2018). System of adaptive control of technological parameters of production of soda. *Chemical Technology, Control and Management*, *2018*(3), 181-185.

12. Wang, L.-X. (1997). A Course in Fuzzy Systems and Control. Prentice Hall.

13. Zadeh, L. A. (1996). Fuzzy logic = computing with words. IEEE Transactions on Fuzzy Systems, 4(2), 103–111. https://doi.org/10.1109/91.493904

14. Сидиков, И. Х., Усманов, К. И., Якубова, Н. С., & Казахбаев, С. А. (2020). Нечеткое синергетическое управление нели-нейных систем. *Journal of Advances in Engineering Technology*, (2), 16-19.

15. Усманов, К. И., Сарболаев, Ф. Н., Исломова, Ф. К., & Якубова, Н. С. (2020). Адаптивно нечеткое синергетическое управление многомерных нелинейных динамических объектов. *Universum: технические науки*, (3-1 (72)), 24-28.