ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-6

UDC 631.315.4

DETERMINING THE SIZE OF THE SOFTENING ZONE ON ONE SIDE OF THE BALL BETWEEN COTTON ROWS

Egamov Nodirbek Murodillo yevich

Senior Lecturer, *Department of General Engineering Sciences, Bukhara State Technical University, Bukhara, Republic of Uzbekistan. E-mail: n.egamovnodirbek01@mail.ru +998994547999*


Abstract: The size of the zone of softening the layer from one rod of the roller was determined, the calculations made showed that the size of the zone of softening the layer from one rod of the roller is 10 - 11 cm. The number of rods installed on the roller and the width of the roller should be 50 cm. When the condition is met, it is determined that the layer is completely softened by the roller in the direction of movement, the number of rods installed on the roller should be 10 - 12 pieces. It was determined that the coverage width of the roller should be 50 cm, which would not damage the cotton.

Key words: cotton, bobbin, skein, skein softening, skein softening zone, tape width, seed, row.

X on one side of the coil Δ(Fig. 1) using the following expression [5; p. 60].

$$\Delta X = R_i \left\{ \begin{array}{l} \dfrac{1}{1-K_c}\left[\pi - 2\arcsin\left(1-\dfrac{h}{R_i}\right)\right] - \\ -2\cos\arcsin\left(1-\dfrac{h}{R_i}\right) \end{array} \right\} + b_p, \quad (1)$$

in this K_c - the scoundrel slip coefficient; b_p – the width of the roller bar, m.

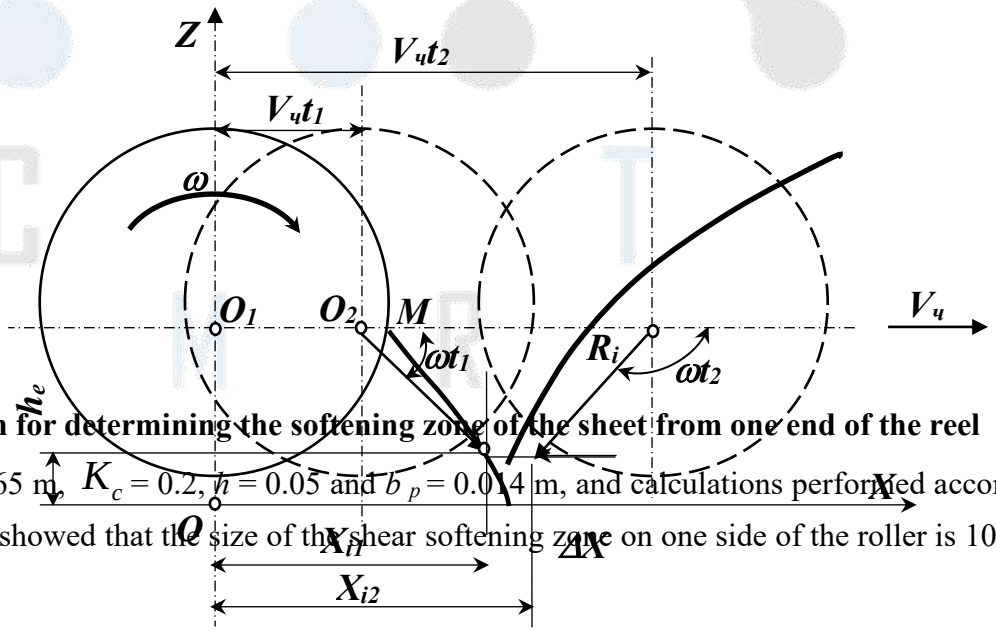

1. Diagram for determining the softening zone of the sheet from one end of the reel

R_i = 0.125 – 0.165 m, K_c = 0.2, h = 0.05 and b_p = 0.014 m, and calculations performed according to expression (1) showed that the size of the shear softening zone on one side of the roller is 10 – 11 cm.

Number of rods mounted on the reel

We determine the number of rods to be mounted on the reel according to the following condition:

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-6

$$n \geq \frac{2\pi R_i(1+K_c)}{\Delta X}. \quad (2)$$

When this condition is met, complete smoothing of the friction by the pulley in the direction of movement is ensured.

Taking into account expression (1.1), expression (1.2) takes the following form:

$$n \geq \frac{2\pi R_i(1+K_c)}{R_i\left\{\begin{array}{l}\frac{1}{1-K_c}\left[\pi - 2\arcsin\left(1-\frac{h}{R_i}\right)\right]- \\ -2\cos\arcsin\left(1-\frac{h}{R_i}\right)\end{array}\right\}+b_p}. \quad (3)$$

= 0.125 – 0.165 m, K_c = 0.2, h = 0.05 and $\boldsymbol{b}_{p=0.014\,m}$ into this expression R_i, we determine that the number of rods installed on the reel should be 10 – 12 pieces.

The scope of the roller coaster

We determine the coverage area of the reel according to the following expression:

$$B = M - 2\Delta, \quad (4)$$

where M is the width of the rows (between cotton rows) where seeds are planted, m;

Δ– width of the protection zone of the roller coaster, m.

Taking the values M = 60 cm, = 5 cm [11; 64-65-p., 13; 146-p.], we determine that the width of the reel should be 50 cm according to expression (4).Δ

List of used literature

1. Aminov SA. Diss.… cand. tech. science - July, 1988. - 130 p.
2. Sineokov GN, Panov IM Theory and raschet pochvoobrabativyushikh machine. - M.: Mashinostroenie, 1977. – 328 p.
3. Tukhtakuziev A., Khudoyarov B., Utepbergenov B., Kengesbaev R. Theoretical substantiation of the parameters of a combined rolling mill // “NEWSLETTER” of the Karakalpakstan branch of the Academy of Sciences of the Republic of Uzbekistan – Nukus – 2018. – No. 2. – P. 16-18.
4. Shapar MS Vliyanie skorosti dvigeniya vibrokatka na ravnomernost uplotneniya pochvi / MS Shapar, SA Shishlov //Traktori i selskohozyaystvennie mashini, 2013. - No. 5. - S. 7-8.
5. Saakyan SS Selskohozyaystvennie machine. Construction, theory and raschet. Mashini dlya obrabotki pochvi, poseva i posadki, vnesenia udobreniy, dlya borbi s vreditelyami i boleznyami selskohozyaystvennih rasteniy. - M.: Selkhozizdat, 1962. - 328 p.
6. Patent 2122302 Russian Federation, MPK A01B 49/02. Kombinirovannoe pochvoobrabativayushee orudie / VB Rykov, VI Taranin, AA Bertov; zayavitel i patentoobladatel Vserossiyskiy nauchno-issledovatelskii i proektno-technologicheskii institut mechanizasii i elektrifikasi selskoho hozyaystva. – No. 97121829/13; lazy 15.12.1997; publ. 27.11.1998, Byul. No. 43.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

7. Patent 129331 Russian Federation, MPK A01B 29/04. Pochvoobrabativayushiy katok / VI Kurdyumov, IA Sharonov, E.N. Proshkin, V.E. Proshkin; zayavitel i patentoobladatel FGBOU VPO "Ulyanovskaya GSXA". – No. 2012105722/13; lazy 17.02.2012; publ. 27.06.2013, Byul. No. 18.

8. Obosnovanie proesssa samoochisheniya spiralnogo nevmaticheskogo katka ot nalipshey pochvi / AS Putrin, VN Varavva, ZI Izbasarova, GL Utenkov // Izvestia Orenburg. GAU. - 2009. - No. 2. - P. 130-135.

9. Nikolaev VA Vibor vesa katka dlya prikativaniya pochvi // Tractor i s.-x. machine - 2007. - No. 3. - P. 28-29. 121.

10. Novie tekhnologii obrabotki pochvi / IB Borisenko [i dr.] // Izve- 143 stiya Nizhnevoljskogo agrouniversitetskogo komplexa: Nauka i visshee professionalnoe obrazovanie. – 2012. – No. 1. – P. 14–16. 122.

11. O bosnovanie proesssa samoochisheniya spiralnogo nevmaticheskogo katka ot nalipshey pochvi / AS Putrin, VN Varavva, ZI Izbasarova, GL Utenkov // Izvestia Orenburg. GAU. - 2009. - No. 2. - P. 130-135.

12. Auezov O.P., Artikbaev BP Influence of the distance between the disks on the degree of damage to plants and destruction of the soil cover // Materials of the scientific and practical conference of the professors of the Noki branch of the Tashkent State Agrarian University: dedicated to the 20th anniversary of the Independence of the Republic of Uzbekistan. – Nokis: TashMAU NF, 2011. – P. 81-84. 7.

13. Artikbaev BP Influence of the speed of movement of the aggregate on the degree of damage to plants and destruction of the soil cover // Introduction of new economical agricultural technologies in agriculture. Collection of reports of the Republican scientific and practical conference. – Tashkent: UzPITI, 2011. – P. 348.

14. Auezov O., Nurabaev B., Artikbaev B. Noviy sposob borbi s pochvennoy korkoy na posevax selskohozyaystvennix kultur // AGRO ILM. - Tashkent, 2009. - 2[10]. - S. 61.

15. Artykbaev BP The influence of precipitation on the size of the floodplain // State, problems and prospects of vegetable, melon and potato growing: Collection of articles of the International Scientific and Practical Conference. Tashkent. 2018. – P. 82-84.