ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-6

UDC 631.315.4

METHOD OF DETERMINING THE VERTICAL LOAD ON A ROLLER DURING HARD SOFTENING

Egamov Nodirbek Murodilloyevich

Senior Lecturer, *Department of General Engineering Sciences, Bukhara State Technical University, Bukhara, Republic of Uzbekistan. E-mail: n.egamovnodirbek01@mail.ru*

Abstract: The article describes the method of determining the value of the vertical load applied to the bobbin during softening of the cotton between cotton rows to the required level. In this of the tractor Theoretical studies have shown that in order for a roller to sink to a specified depth at a speed of 1.7–2.2 m/s, the vertical load applied to it should be in the range of 949–954 N.

Keywords: mulch, mulch loosening, depth of penetration of mulch into the soil, rod, large diameter of mulch, small diameter of mulch, plant stems, mulch thickness.

It is known from the researches that the vertical loading applied to softening cages usually depends on parameters such as the coefficient of static crushing of the soil, the coefficient of proportionality and the depth of the cage [1, 2, 3, 4].

We determine the vertical load Q applied to the roller bearing by the following expression, provided that it is immersed to a specified depth [5].

$$Q = q_0(1 + K_v V_ч^2)h_0 b_p B, \quad (1)$$

here q_0 - the coefficient of static crushing of the soil, N / m ^{3};

K_v – proportionality coefficient, s ^{2} / m ^{2};

h_0 – average depth of immersion of the sluice gate into the bedrock, m .

Taking into account that the tip of the roller has the shape of a convex parabola, we determine its average depth of immersion in the substrate using the scheme shown in Figure 1. Accordingly,

$$h_0 = \frac{S_1 - S_2 - S_3}{B}, \quad (2)$$

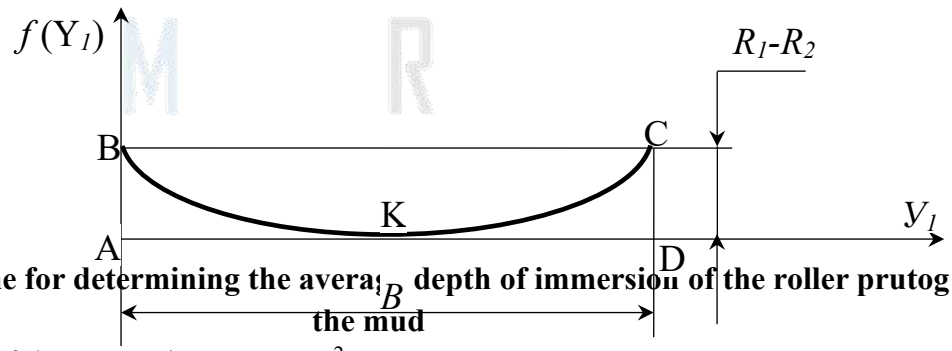


Figure 1. The scheme for determining the average depth of immersion of the roller prutog into the mud

where S_1 is the face of the rectangle ABCD, m ^{2};

S_2, S_3 – the surface area of the shapes ABK and KCD, respectively, m ^{2}.

$S_2 = S_3$, we can write expression (2) in the following form:

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-6

$$h_0 = \frac{S_1 - 2S_2}{B}. (3)$$

According to the scheme presented in Fig. 1

$$S_1 = (R_1 - R_2)B (4)$$

and

$$S_2 = \frac{1}{2}\int_0^B f(Y_1)dY_1. (5)$$

In the above approach, we assume that $f(Y_1)$ changes according to the following law

$$f(Y_1) = a_1 + b_1 Y_1 + c_1 Y_1^2, (6)$$

here a_1, b_1 and c_1 - coefficients;

Y_1 - horizontal coordinate axis directed perpendicular to the rows of seeds, m.

the b_1 coefficients c_1 of equation (6) a_1 from the following conditions:

$Y_1 = 0$, $f(Y_1) = R_1 - R_2$ $Y1 = 0.5B$ $f(Y_1) = 0$ and $Y1 = B$. Using $f(Y_1) = R_1 - R_2$ these conditions, a_1 we have the following equations to determine , c_1 and b_1

$$R_1 - R_2 = a_1; (7)$$

$$0 = (R_1 - R_2) + b_1\frac{B}{2} + c_2\frac{B^2}{4}; (8)$$

$$R_1 - R_2 = (R_1 - R_2) + b_1 B + c_1 B^2. (9)$$

Solving these equations together, we get the following.

$$a_1 = R_1 - R_2; (10)$$

$$b_1 = -\frac{4(R_1 - R_2)}{B}; (11)$$

$$c_1 = \frac{4(R_1 - R_2)}{B^2}. (12)$$

a_1, b_1 and c_1 taking into account these values, the expression (6) will have the following form.

$$f(y_1) = R_1 - R_2 - \frac{4(R_1 - R_2)}{B}y_1 + \frac{4(R_1 - R_2)}{B^2}y_1^2. (13)$$

$f(y_1)$ Substituting this value into expression (5), we find S_2

$$S_2 = \frac{1}{2}\int_0^B \left[R_1 - R_2 - \frac{4(R_1 - R_2)}{B}y_1 + \frac{4(R_1 - R_2)}{B^2}y_1^2\right]dy_1 (14)$$

or from this

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-6

$$S_2 = \frac{1}{2}\left[(R_1 - R_2)y_1 - \frac{4(R_1 - R_2)}{B}\frac{y_1^2}{2} + \frac{4(R_1 - R_2)}{B^2}\frac{y_1^3}{3}\right]_0^B = \\ = \frac{1}{6}(R_1 - R_2)B. \quad (15)$$

S_1 and S_2 in expressions (4) and (5) into (3).

$$h_0 = \frac{(R_1 - R_2)B - 2\frac{1}{6}(R_1 - R_2)B}{B} = \frac{2}{3}(R_1 - R_2). \quad (16)$$

Taking this into account, expression (1.1) takes the following form:

$$Q = \frac{2}{3}q_0(1 + K_v V_u^2)(R_1 - R_2)b_p B. \quad (17)$$

This expression $q_0 = 5 \cdot 10^6$ N/m^3 [6], $K_v = 0.01$ s^2/m^2 [7], $R_1 = 0,5D_1 = 0.165$ m, $R_2 = 0,5D_2 = 0.12$ m, $b_p = 0.014$ m and $B = 0.50$ m [8, 9], we determine that the vertical load applied to the roller should be in the range of 949 – 954 N for it to sink to the specified depth at a speed of 1.7 – 2.2 m/s.

List of used literature

1. Artikbaev B.P., Development and parameters of disk working bodies for cotton cultivator to soften the thicket justification (in the conditions of the Republic of Karakalpakstan): Diss...t.f.f.d. - Tashkent city - 2019. - 179 p

2. Tukhtakuziev A., Hadji-Muradov A.O., Nuriddinov A. Teoreticheskie predposylki k opredeleniyu rationalnyx parametrov diskovogo katka prisposobleniya k plugu // Scientific and technical journal of the Fergana Polytechnic Institute. - Fergana, 2006. - No. 2. - B. 24-26.

3. Mukimova D.K. Justification of the parameters of the disk rollers of a combined machine used in the furrow cultivation of plowed lands. PhD - abstract - Tashkent - 2020. p. 12-13.

4. Klenin N.I., Sakun V.A. Agricultural and melioration machines. - M.: Kolos, 1994. - 751 p.

5. Mamarasulova M.T. Substantiation of the type and parameters of the roller of a machine that provides furrow cultivation of plowed lands. Dissertation. … PhD., – Yangiyul. 2021. – 157 p.

6. Shiryaev A.M. Priposevnoe uplotnenie pochv y // Mechanization selkogo hozyaystva. - Moscow, 1988. - No. 3. - 33-35 p.

7. Sineokov G.N., Panov I.M. Theory and raschet pochvoobrabatyvayushchikh mashin. - Moscow: Mashinostroenie, 1977. - 328 p.

8. Artykbaev B.P. **Development and justification of parameters of disk working bodies for a cotton cultivator for loosening the stubble (in the conditions of the Republic of Karakalpakstan).**
Dissertation…PhD., – Yangiyul **. 2019. p. 117.**

9. Sablikov M.V. Mechanization khlopkovodstva -M.: Kolos, 1975.-320 p.