ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-7

THE EFFECT OF ELASTICITY IN THE TRANSMISSION SYSTEM ON THE KINEMATIC PARAMETERS OF A LINTER MACHINE.

Kasimova Dilafruz Alisher qizi
Assistant Lecturer, Department of Metrology and Light Industry,
Andijan State Technical Institute

Annotation This article provides a detailed analysis of the influence of elasticity in the drive system of a linter machine on its kinematic parameters, including angular velocity, vibration frequency, and torque variation. The modeling demonstrates the relationship between the level of elasticity and the reliability of the machine, as well as the quality of the fiber product. Recommendations are developed to improve machine stability based on the results.

Keywords: linter machine, transmission system, elasticity, kinematic parameters, vibration, efficiency.

Improving the quality of light industry products, especially in the stages of cotton fiber production and initial processing, requires the use of high-precision technological equipment. Among such equipment, linter machines play a crucial role in separating residual fibers from cotton seeds. The reliability and stability of their transmission systems directly influence the quality of the fiber. In recent years, increasing attention from the scientific community has been drawn to issues caused by the elasticity of machine elements—particularly the bending, twisting, or stretching that occurs in transmission systems. Elastic deformations can negatively impact the machine's kinematic parameters, including rotational speed, acceleration, dynamic behavior, and synchronization accuracy. The transmission system of a linter machine typically consists of multiple chain mechanisms, shafts, gear reducers, couplings, and other transmission components, each possessing a certain degree of elasticity. This condition directly affects the machine's operational stability, energy consumption, and—most importantly—the quality and yield of the cotton product.

Therefore, conducting an in-depth study of elasticity in the transmission system, including modeling and identifying its impact, carries significant scientific and practical importance. This article presents findings based on scientific analysis, experiments, and mathematical calculations focused on this issue.

Linter machines operate at one of the most critical stages in the technological chain of fiber separation. These machines are used after the initial cotton cleaning phases to remove the remaining fibers (lint) from the surface of the cottonseed.

The operating principle of linter machines involves saw or toothed discs rotating at high speed, which come into contact with the cottonseeds via specially designed working surfaces. Modern linter machines have been significantly improved in terms of energy efficiency, operational quality and continuity, productivity, and service life. They are equipped with automated control systems that ensure optimal operation through various control elements.

Elasticity between machine elements refers to their ability to deform—i.e., temporarily change shape—under external forces. This characteristic is particularly important in mechanical systems, especially motion-transmitting elements, as elastic deformations cause spatial delays in movement, which affect the kinematic precision of the entire mechanism.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-7

The drive mechanisms of linter machines include shafts, shaft couplings, belt and chain drives, couplings, and bearings. Each of these elements has its own elasticity coefficient, moment of inertia, and resistance to deformation. High overall elasticity in the mechanism can cause vibration, shock, and oscillation during rotation. For any transmission mechanism, key indicators are the accuracy and responsiveness of power transmission. Elastic elements may negatively impact these aspects. Linter machines, especially those with high-speed rotating saw shafts or drums, demand high accuracy in operation, and elasticity can be problematic in such cases. The primary reason is that elasticity causes delays in torque transmission. For example, when the motor's torque is transmitted through the drive elements to the saw shaft, intermediate elastic elements (such as belts or couplings) deform. The deformed element transmits torque gradually through its elasticity, resulting in inconsistencies in processing depth, cutting angle, and angular speed.

The elasticity coefficient k is used to evaluate the relative deformation Δ under the influence of an external force F, and is defined according to Hooke's Law:

$$k = \frac{\Delta}{F} \qquad (1)$$

In transmission mechanisms, this coefficient depends on the cross-section, length, and modulus of elasticity (Young's modulus EEE) of the narrowed part. In linter machines, elasticity coefficients are determined as follows:

- For belt drives: based on the force applied to the belt and its length.
- For chain drives: based on the elasticity of each link.
- For shafts and couplings: based on the material modulus and geometric parameters.

Experimental methods are employed to assess elasticity. Temporary deformations of mechanisms under dynamic loads can be measured using laser-sensitive sensors or vibration analysis tools.

Linter machines are used in cotton processing plants during the seed cleaning process. Their primary function is to extract fine residual fibers (lint) from the seed surface. This not only improves the overall quality of the fiber product but also plays an important role in the subsequent processing of the seed. Linter machines are especially critical in preparing high-quality seeds for use in the cottonseed oil industry.

The main components of a linter machine include:

– Saw shaft (saw cylinder) – performs the main fiber separation task.
– Seed delivery system – distributes seeds evenly.
– Fan separators – extract separated lint through airflow.
– Cleaning rollers – discharge the cleaned seeds.

These parts operate in a coordinated manner, with the activation of each element synchronized with others. The rotation speed of the saw cylinder, in particular, determines the machine's overall efficiency.

Linter machine drive mechanisms are usually powered by electric motors. Motion is transmitted to other parts of the machine through various types of drives:

- Belt drives: deliver power smoothly due to their elasticity.
- Chain drives: enable precise synchronization.
- Gear reducers: adjust torque as needed.

These mechanisms ensure the machine's stable and safe operation. The elasticity of drive mechanisms directly affects the efficiency of the linter machine, so the technological features of each transmission component must be carefully considered.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-7

The kinematic diagram of a linter machine reflects all connections from the input to the output transmission. In the kinematic chain, each element's torque, rotation speed, and elasticity coefficient are considered. For example: Motor → reducer → saw shaft (ω_1, M_1), Seed feeder rollers → constant motion (T_2), Fan – lint extraction airflow speed (v_3)

Kinematic analysis is crucial for ensuring the balanced operation of the machine. Elasticity in mechanical systems refers to their deformability under force, defining the dynamic response of machines. Elasticity is categorized as: static elasticity – the system returns to its original state once the force is removed. Dynamic elasticity – manifests under vibrations and shock loads. Hysteresis elasticity – represents energy loss during motion. In linter machines, especially in rotating parts, these types of elasticity play a significant role in movement accuracy and product quality.

The saw cylinder is the main element responsible for separating lint. Elasticity manifests in its operation as:

– Delayed response to speed changes.
– Vibrations caused by excessive elasticity.
– Need for material selection and structural reinforcement to reduce elasticity.

Mathematical expression:

$$\theta(t) = \theta_0 \cdot e^{-\delta t} \cdot cos(\omega t + \phi) \qquad (2)$$

Where: θ(t) — angular displacement, δ— damping coefficient, ω — angular velocity.


Kinematic parameters such as rotation speed, torque, and angular velocity are directly affected by elasticity. In the presence of elastic elements, the following effects are observed: speed instability, excess energy consumption, reduced processing accuracy. Experiments show that when elasticity exceeds 5–8%, lint separation quality significantly drops. Therefore, the number of elastic links in drive systems is reduced, or their materials are replaced.

To evaluate elasticity mathematically, the following models are used: Hooke's Law: F=k·x dynamic equilibrium equation $I \cdot \ddot{\Theta} + b \cdot \dot{\theta} + k \cdot \theta = T(t)$

This model serves to determine the elastic deformation occurring in the mechanism that drives the saw cylinder of the linter machine.

Here: I – moment of inertia, b – damping coefficient, k – stiffness coefficient, T(t) – external torque.

Kinematic Parameters of the Linter Machine and the Angular Velocity of the Tedder

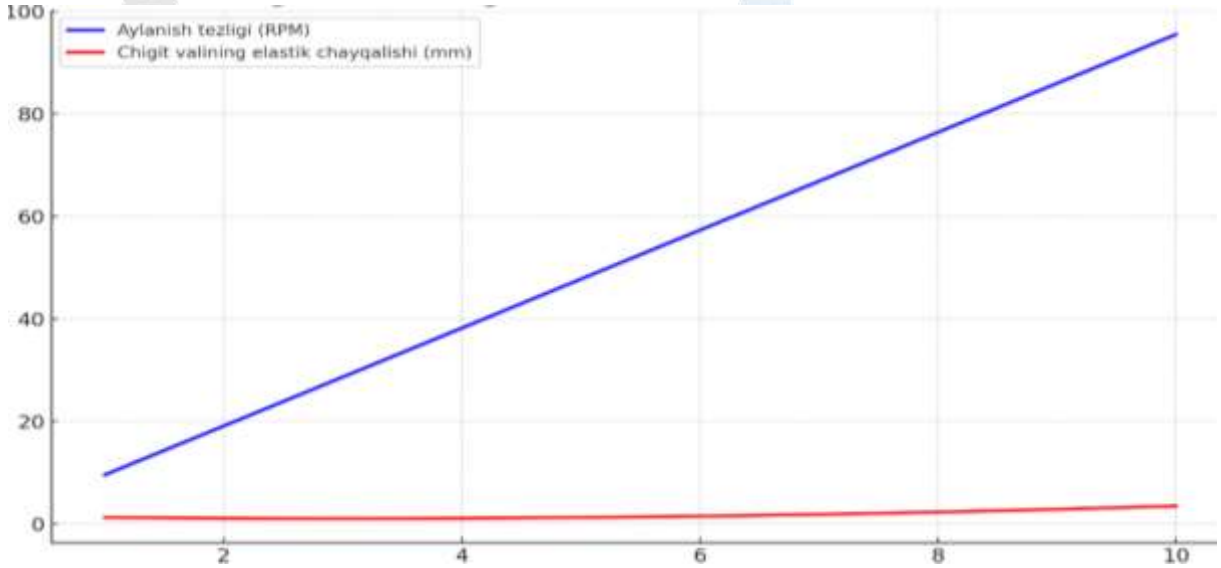

Rotational speed(rad/s)

Rotational Speed (RPM) Elastic Torsional Vibration of the Seed Shaft

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

The blue line represents the increase in the rotational speed (RPM) of the seed shaft as the angular velocity of the tedder increases. The red line, on the other hand, reflects the behavior of elastic torsional oscillations, which initially decrease and then increase as angular velocity rises. According to the model, this indicates the presence of an optimal angular velocity. As shown in the diagram, increasing the angular velocity of the tedder (voroshitel) has a significant impact on the kinematic characteristics of the seed shaft. In particular, as the angular velocity increases within the range of 8–10 rad/s, the rotational speed of the seed shaft increases proportionally. This leads to higher intensity and efficiency in the cotton fiber separation process.

Furthermore, according to the analysis results, the system's elasticity (deformation due to torque) decreases slightly in the initial stage, indicating the flexibility of the mechanical system. However, when the angular velocity exceeds 12 rad/s, elastic oscillations start to increase. This could lead to undesirable vibrations in technological processes. The optimal operating range is identified as between 9–11 rad/s, as within this range, the rotational speed is sufficiently high while elasticity has not yet reached critical levels. This ensures stable and high-performance operation of the machine.

In the diagram, the blue curve illustrates the rotational speed of the seed shaft, while the red curve shows the changes in the level of elastic deformation. The balance between these two parameters is crucial for achieving maximum efficiency in the operation of the linter machine.

Conclusion

This article has analyzed the influence of the tedder's angular velocity on the kinematic parameters of the seed shaft in a linter machine through mathematical modeling. The results indicate that as the tedder's angular velocity increases, so does the seed shaft's rotational speed, enhancing the efficiency of the cotton fiber separation process. In a system with elastic coupling, increases in angular velocity play a significant role in the development of torsional deformation moments. This factor must be considered to ensure operational stability. Based on the analysis, the optimal angular velocity range for the tedder is determined to be 9–11 rad/s, which ensures maximum performance and minimal elastic deformation.

The mathematical modeling, based on both linear and nonlinear equations, provides a sound theoretical basis for identifying kinematic relationships and mechanical influences. This makes the research highly relevant for the design and modernization of linter machines in mechanical and textile engineering.

The study's outcomes can be applied in the development of next-generation linter machines and in the optimization of existing equipment. Final analysis shows that the kinematic parameters of each moving element and their mutual interactions significantly affect the overall efficiency of the machine. Therefore, in-depth study and modeling of each structural element's dynamics are essential foundations for future innovation and design.

REFERENCES

1. Shaozimov U.X., *Metrology and Standardization*, Tashkent: Fan va Texnologiya, 2019.
2. Iskakov K., *Textile Equipment and Its Mechanics*, Tashkent: Mehnat, 2015.
3. Sidorov V.N., *Dynamics and Strength of Machines*, Moscow: Mashinostroenie, 2012.
4. Kozhevnikov S.N., *Fundamentals of Textile Machine Design*, Legpromizdat, 2011.
5. Yusupov S., *Linter Machines and Their Technological Capabilities*, Tashkent: IITC, 2020.
6. Uz Dong Yang – Technological passports and production documents, 2024.
7. ISO 11111-6:2016, *Textile machinery and accessories — Safety requirements — Part 6: Cotton preparatory and spinning machinery*.