ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-9

# MODELING OF EMOTIONAL-ADAPTIVE INTERACTION OF COLLABORATIVE ROBOTS IN THE INDUSTRY 5.0 ENVIRONMENT BASED ON FRACTAL-NEURAL LOGIC

**Vladyslav Yevsieiev[1], Svitlana Maksymova[1], Artem Lisovskyi[2], Amer Abu-Jassar[3]**

[1]Department of Computer-Integrated Technologies, Automation and Robotics, Kharkiv National University of Radio Electronics, Ukraine

[2]Department Artificial Intelligence Department, Kharkiv National University of Radio Electronics, Ukraine

[3]Department of Computer Science, College of Information Technology, Amman Arab University, Amman, Jordan

## ABSTRACT

The article presents an approach to modeling the emotional-adaptive interaction of collaborative robots based on fractal-neural logic within Industry 5.0 concept. The proposed model combines the fractal nature of noise with deep neural networks to reproduce the dynamics of emotional states in a changing environment. The simulation demonstrates the system's ability to adaptively learn and take into account the context of interaction between agents. The results indicate the effectiveness of the approach for building flexible, emotionally sensitive robotic systems focused on cognitive-social integration. The model can be used in service, production, and social robotics to create new forms of cooperative behavior.

**Keywords:** Fractal Logic, Emotional Adaptation, Collaborative Robotics, Neural Networks, Industry 5.0, Cognitive Interaction.

## INTRODUCTION

In the context of the rapid development of the Industry 5.0 concept, which focuses on the synergy of humans and technologies, research aimed at improving the quality of interaction between the operator and collaborative robots is becoming particularly relevant. Unlike the previous Industry 4.0 paradigm [1]-[14], where the priority was fully automated production, the current trend involves the intelligent, adaptive and human-oriented integration of artificial intelligence into real production processes. In view of this, there is a growing need for models that can take into account not only the physical state of the system, but also the cognitive and emotional state of a person as an active subject of interaction. Therefore, various methods and approaches can be used here [15]-[34]. This is especially important for environments with a high level of load and dynamics, where the stability and safety of systems depend on a timely response to microfluctuations in the operator's behavior. Traditional mathematical and logical models are not effective enough to reflect the complex relationships between the human emotional state and the reactions of robotic agents [35]-[41].

In this regard, the construction of hybrid models that combine fractal analysis, which allows to reveal the deep structure of behavioral changes, and neural networks that are capable of adaptation in conditions of uncertainty, becomes relevant. The proposed research is aimed at developing fractal-neural logic as a new approach to formalizing emotional-adaptive interaction between a person and a group of collaborative robots. Such an approach will not only qualitatively improve the cognitive interpretation of processes, but will also ensure high-precision behavioral adaptation of technical agents to variable psychophysiological parameters of the operator. The modeling involves the use of Hurst indices, fractal dimension and fractal perturbation, integrated into the structure of the neural network architecture, which allows to implement adaptation in real time.

Therefore, the development of such models opens up new prospects for creating safe, flexible and cognitively sensitive robotic systems of a new generation.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-9

## LITERATURE REVIEW

Wang, S., explores an approach to cognitive-intellectual task allocation between humans and automated systems based on non-cooperative game theory using two-level optimization, which allows for flexible adaptation of cooperation models in the context of changing production structures [42].

Arora, S., proposes a conceptual explanation of the importance of emotional intelligence as a basis for effective human-machine interaction, emphasizing the need to interpret social and psychological signals to ensure a balance between technology and human factors [43].

Tha study by Naithani, K. deepens the topic by analyzing the role of emotional intelligence in the transformation of interaction in Industry 5.0, focusing on the practical implementation of cognitive models in industrial environments with a high level of collaboration [44].

The work by Loizaga, E. systematizes the influence of human factors, sensory principles and existing commercial solutions in the context of designing future human-centered work operations, providing an empirical basis for formalizing interaction criteria [45].

The article by Ricci, A. reviews the current gaps in the characterization of human factors in the context of Industry 5.0, indicating the need to develop new models capable of integrating the parameters of behavior, attention and skills of operators in digital environments [46].

The publication by Esqueda-Merino, D. presents the fractal methodology as a basis for innovative engineering training and the creation of new products within the Industry 4.0/5.0 paradigm, which opens up prospects for the use of fractal models in the development of robotic systems [47].

The work by Akman, A. conducts a bibliometric analysis of digital transformation, which focuses on the growing role of human-centric technologies and indicates the development trends of the concept of society 5.0 as the basis for a hybrid cognitive environment [48].

The research by Damaševičius, R. presents the impact of collaborative robots on the effectiveness of human-machine cooperation, indicates the importance of flexible interfaces and context-dependent interaction models, which have significant potential for implementing adaptive behavior in multi-agent systems [49], [50].

However, from the point of view of these studies, it is possible to use the results of fractal models, characteristics of emotional intelligence and behavior structures, which allow formalizing and training systems for adaptive interaction in a dynamic environment. In contrast, some conceptual models, focused only on theoretical analysis or training approaches, require significant refinement for integration into complex cognitive-technical architectures. In summary, it should be noted the high relevance of research in the field of human-machine integration based on emotional-cognitive models, which is confirmed by the growing attention to fractal logic, sensory adaptation, and optimization approaches within the framework of Industry 5.0.

## COLLABORATIVE ROBOTS EMOTIONAL-ADAPTIVE INTERACTION MODEL DEVELOPMENT BASED ON FRACTAL-NEURAL LOGIC

Emotionally adaptive interaction of collaborative robots is defined as the ability of a robotic system to dynamically change its behavior in response to changes in the emotional or cognitive state of the operator in order to maintain effective, safe and harmonious cooperation. This approach reflects the latest paradigm of Industry 5.0, which assumes not only the functional efficiency of technical systems, but also humanely-oriented adaptability in the process of joint work of man and machine. Unlike traditional systems that respond exclusively to physical or sensory parameters, emotionally adaptive interaction requires a deeper understanding of the psychophysiological state of a person and

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875, 2024-6.875 ResearchBib IF: 9.948 / 2024



taking into account its fluctuations in real time. In this regard, there is a need to build mathematical models that are able not only to formalize the dynamics of emotional influence, but also to integrate this data into the behavioral algorithms of collaborative agents. The use of fractal analysis allows us to identify deep patterns in the structure of cognitive changes, and neural networks provide the ability to adapt in conditions of uncertainty and environmental changes.

The definition of a time series in the context of this study is the process of formalizing a sequence of numerical values that reflect the change in a certain physiological or behavioral parameter of the operator over time. Such a series is the basis for further analysis of the cognitive or emotional state of a person interacting with a collaborative robotic system. As part of the study, a time series $X(t)$ is considered as an ordered set of values recorded at discrete points in time, where $t \in \{t_1, t_2, \dots, t_N\}$, and $X(t) \in \mathbb{R}$ – These include heart rate, cognitive load, delay between commands, or reaction time. Each of these metrics can reflect emotional or cognitive fluctuations that are important to consider when designing adaptive robot behavior.

In the emotional-adaptive interaction model, these time series are used to: construct a fractal operator stress index (FCSI) (e.g., via the Hurst index or fractal dimension); generate inputs for a neural network that recognizes behavioral patterns; and detect continuous changes in the operator's state to adapt robot actions in real time. Thus, the time series serves as the basic source of information for the entire fractal-neural logic model, allowing us to formalize the relationship between human behavior and the response of technical agents.

The Hurst fractal index determines the measure of long-term dependence and self-similarity of the series:

$$R/_{S(n)} \sim n^H \tag{1}$$

$R$ – range of the accumulated deviation from the mean on a segment of length $n$;
$S$ – standard deviation on the same interval;
$H \in (0,1)$ – the Hurst fractal index.
Then the fractal cognitive index (FCSI) can be represented by the following model:

$$FCSI(t) = \alpha_1 \cdot H(t) + \alpha_2 \cdot D(t) + \alpha_3 \cdot \frac{dH(t)}{dt} \tag{2}$$

$H(t)$ – local Hurst index at time $t$;
$D(t)$ – local fractal dimension by box-counting method;
$\frac{dH(t)}{dt}$ – rate of change in the complexity of the series;
$\alpha_i$ – weighting factors (depending on the task: reaction, stress, overload).

Model 2 allows us to numerically assess the current state of the operator: $FCSI \to 0.5$, then normal cognitive activity if $FCSI > 0.7$ – overvoltage.

To describe the interaction between agents (robots) and the operator through adaptive influence vectors with fuzzy parameters, it is necessary to formalize the adaptive influence vectors between agents. Let us represent agent adaptation vector $R_i$ in the next way:

$$\vec{A}_i(t) = \sum_{j=1}^{M} \mu_{ij}(t) \cdot \vec{\phi}_{ij}(t) \tag{3}$$

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875, 2024-6.875 ResearchBib IF: 9.948 / 2024



$\vec{A}_i(t)$ – adaptive vector of $i$-th agent (direction of behavior change);

$M$ – number of influencing factors (signals from the operator, other agents);

$\mu_{ij}(t) \in [0,1]$ – fuzzy membership function of influence importance $j$ of the impact on the agent $i$;

$\vec{\phi}_{ij}(t)$ – direction of influence $j$ on $i$ (e.g., movement, holding, support).

Dynamics of adaptive interaction:

$$\frac{d\vec{S}_i}{dt} = f(\vec{A}_i(t), FCSI(t), \vec{S}_{op}(t)) \quad (4)$$

$\vec{S}_i(t)$ – $i$-th robot state (position, behavioral phase);

$\vec{S}_{op}(t)$ – operator state;

$f(\cdot)$ – nonlinear regulation function, will be implemented through NN.

Model 4 allows us to describe how the agent's behavior changes under the influence of external and internal fuzzy signals – in particular, the operator's cognitive state.

To train a neural network to recognize patterns of operator behavior in a fractal environment and perform corresponding actions by robots, we will develop a model of a neural network with fractal noise at the input, the input vector of which can be represented as follows:

$$\vec{x}(t) = [X(t-\tau), X(t-2\tau), \dots, X(t-n\tau)] + \vec{\varepsilon}_f \quad (5)$$

$X(t)$ – cognitive or behavioral signal;

$\tau$ – delay step;

$\vec{\varepsilon}_f \sim FBM(H)$ – fractal noise (Fractional Brownian Motion);

$H \in (0.5,1)$ – fractality level, the higher the level, the smoother the oscillations.

Proposed NN architecture is next: input $\vec{x}(t)$ + fractal noise; hidden part based on RNN or GRU/LSTM; output as action template class $y(t) \in \{"overload", "reflex", "norm"\}$.

The loss function is found by the following model:

$$\mathcal{L} = \sum_t (y(t) - \hat{y}(t))^2 + \lambda \cdot Var(\vec{\varepsilon}_f) \quad (6)$$

$y(t)$ – the real (reference) value of the source class or target variable at a point in time $t$. In our case, it may correspond to the category of the operator's cognitive state, for example: "normal", "overload", "stress";

$\hat{y}(t)$ – the predicted (model) value that the neural network generates based on the input fractal series, ideally, it should be as close as possible to $y(t)$;

$(y(t) - \hat{y}(t))^2$ – This is the squared error, which shows the deviation of the forecast from the true value for each point in time $t$. By minimizing this part of the function, the network learns to accurately reproduce behavioral patterns;

$\vec{\varepsilon}_f$ – the fractal noise vector, which is added to the model input data to simulate the operator's cognitive fluctuations (e.g., inattention or stress), is generated based on fractional Brownian motion with a given Hurst index;

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-9

$Var(\vec{\varepsilon}_f)$ – fractal noise variance, which shows the degree of disturbance of the input signal; including this part in the loss function allows you to limit excessive noise growth during training;

$\lambda$ – regularization coefficient, which controls the balance between the accuracy of reproducing the desired result and resistance to fractal perturbation, with a large λ the model is less sensitive to noise, but may lose adaptability; with a small one - more sensitive, but less stable.

The loss function 6 allows you to simultaneously achieve two goals: accurate classification of operator states and stable operation of the model in conditions of cognitive uncertainty, which is key to implementing emotional-adaptive interaction in Industry 5.0.

## DEVELOPMENT OF A PROGRAM FOR MODELING EMOTIONAL-ADAPTIVE INTERACTION OF COLLABORATIVE ROBOTS BASED ON FRACTAL-NEURAL LOGIC

The choice of Python is due to its broad support of libraries for numerical modeling, machine learning, and time series processing [51]-[54], which is critically important for the implementation of fractal-neural logic in modeling emotional-adaptive interaction. Python provides high flexibility and speed of development of experimental models due to its simple syntactic structure and integration with scientific tools. The PyCharm development environment is a powerful tool for writing, debugging, and visualizing code, which allows for the effective implementation of complex algorithmic concepts. PyCharm supports intelligent autocompletion, work with virtual environments, and integration with version control systems, which is especially important in scientific research. This combination of tools allows you to concentrate on the essence of modeling and facilitates the analysis of results within the framework of digital concepts of Industry 5.0.

Let us describe the software implementation of the developed models based on the Python language.

```
def generate_fbm(n, hurst=0.75):
    dt = 1.0 / n
    t = np.linspace(0, 1, n)
    covariance = np.zeros((n, n))
    for i in range(n):
        for j in range(n):
            covariance[i, j] = 0.5 * (t[i]**(2*hurst) + t[j]**(2*hurst) - abs(t[i]-t[j])**(2*hurst))
    L = np.linalg.cholesky(covariance + 1e-10 * np.eye(n))  # stabilization
    noise = np.random.randn(n)
    fbm_series = L @ noise
    return fbm_series
```

This code snippet implements the generation of fractal Brownian motion (fBM), which is used to model fractal noise with the Hurst parameter. The function forms a covariance matrix based on the time scale, performs its Choletsky decomposition to obtain correlated noise, and generates a sequence that simulates a stochastic process with memory. Such a model allows you to introduce randomness with fractal properties into the system, which is important for modeling unpredictable emotional influences in the operator's cognitive processes.

```
np.random.seed(42)
N = 200
signal_clean = np.sin(np.linspace(0, 10, N)) + np.random.normal(0, 0.2, N)
fbm_noise = generate_fbm(N, hurst=0.8)
signal_noisy = signal_clean + 0.3 * fbm_noise
```

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-9

```
# Scaling
scaler = MinMaxScaler()
X_scaled = scaler.fit_transform(signal_noisy.reshape(-1, 1))
```

This code snippet generates a synthetic time series that simulates the emotional signal of an operator with added fractal noise to account for stochastic fluctuations. The generated base signal with a sinusoidal character is supplemented with normally distributed noise and fractal Brownian noise, which allows modeling complex dynamic behavioral patterns. After generation, the data is scaled using `MinMaxScaler` to normalize the input signal for further use in the neural network.

```
class LSTMModel(nn.Module):
    def __init__(self, input_size=1, hidden_size=64, output_size=1):
        super(LSTMModel, self).__init__()
        self.lstm = nn.LSTM(input_size, hidden_size, batch_first=True)
        self.linear = nn.Linear(hidden_size, output_size)
    def forward(self, x):
        lstm_out, _ = self.lstm(x)
        out = self.linear(lstm_out[:, -1, :])
        return out
model = LSTMModel()
```

This code snippet defines an LSTM-based neural network designed to process sequential data, such as time series with emotional characteristics. The input data is processed by a recurrent `LSTM` layer, which allows the model to take into account temporal dependence, after which the final output is passed through a linear layer to generate predictions. This architecture is suitable for modeling emotional-adaptive behavior in robot-human interaction.

```
EPOCHS = 100
losses = []
for epoch in range(EPOCHS):
    model.train()
    output = model(X_tensor)
    mse_loss = criterion(output, y_tensor.unsqueeze(-1))
    reg_term = 0.01 * np.var(fbm_noise)
    loss = mse_loss + reg_term
    optimizer.zero_grad()
    loss.backward()
    optimizer.step()
    losses.append(loss.item())
    if epoch % 10 == 0:
        print(f"Epoch {epoch}, Loss: {loss.item():.4f}")
```

This code snippet implements the process of training an LSTM model over 100 epochs, taking into account the loss, which includes the mean square error and a regularization term based on the variance of fractal noise. In each iteration, the model predicts values, calculates the overall loss function, backpropagates the error, and updates the weights. The loss is stored for further analysis, and every 10 epochs the current value of the loss is output.

## MODELING EMOTIONAL-ADAPTIVE INTERACTION OF COLLABORATIVE ROBOTS BASED ON FRACTAL-NEURAL LOGIC

To conduct the simulation in the presented program code, a number of input data with specific numerical parameters were used. The main input sequence is a sinusoidal signal with a length of 200

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-9

points (`N = 200`), to which is added random noise with a normal distribution with parameters mean 0 and standard deviation 0.2. In addition, fractal noise generated using the Brownian motion function with a Hurst exponent `hurst = 0.8` is added to this signal, and its influence is scaled by a factor of 0.3. The resulting noisy signal is normalized to the range \[0, 1] using the `MinMaxScaler` method. To train the model, sequences of length 10 (`SEQ_LEN = 10`) are created, i.e. each input vector contains 10 signal points, and the corresponding value is the next point. The LSTM model uses the input dimension `input_size = 1`, the hidden layer size `hidden_size = 64` and the output `output_size = 1`. The model is trained for `EPOCHS = 100` epochs using the Adam optimizer with a learning factor of 0.01 and a loss function based on the mean square error supplemented with a regularization term equal to 1% of the fractal noise variance. These parameters provide the conditions for modeling the emotional-adaptive interaction of collaborative robots within the framework of fractal-neural logic. The simulation results obtained with the above parameters are presented in Figure 1-3.

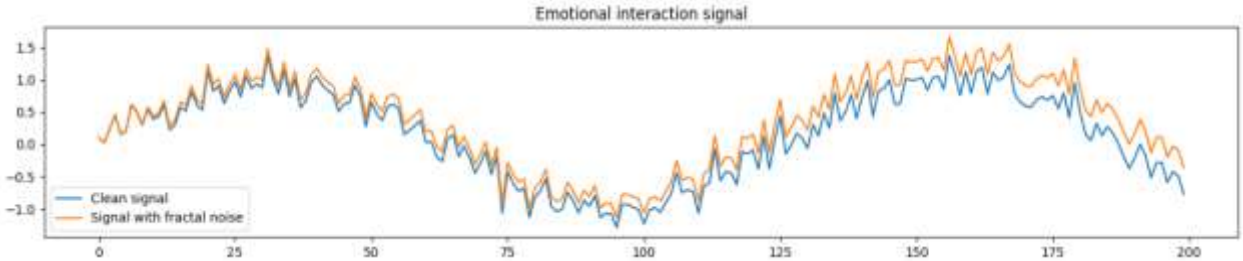



**Figure 1:** Emotional interaction signal graph

The graph (Fig. 1) shows two signals of emotional interaction: a pure sinusoidal signal and a signal with added fractal noise. The pure signal has a smooth oscillatory character with periodic maxima and minima, corresponding to cyclical changes in the emotional state of the operator. The added fractal noise causes minor local fluctuations that make the signal more realistic, simulating random influences and uncertainties in behavior. The amplitude of the noisy signal is slightly higher, which indicates an increase in the variability of the emotional manifestation, while preserving the main trend structure. The overall shape of the signals correlates well, which indicates a successful modeling of the main pattern taking into account random variations. This approach allows the model to adaptively take into account real fluctuations in the operator's emotions, which is important for the effective interaction of collaborative robots in the Industry 5.0 environment.

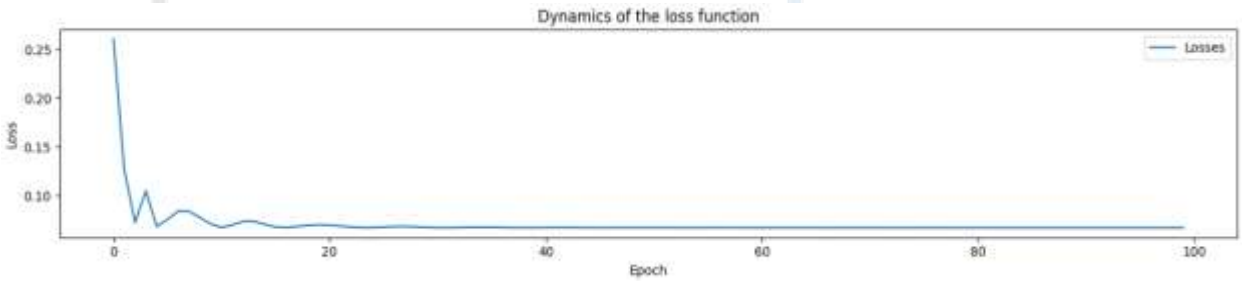



Figure 2: Loss function dynamics graph

The graph (Fig. 2) demonstrates a rapid decrease in the value of the loss function during the first 10 epochs of model training, where loss drops from the initial level of about 0.26 to values below 0.07. Subsequently, the loss function stabilizes with minor fluctuations in the range of approximately 0.06–0.065, which indicates the achievement of a convergence state (Fig. 3). Such dynamics confirms the effectiveness of the training process, the absence of overtraining and adequate adaptation of the

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-9

LSTM model to data with fractal noise. It is logical to assume that the model has well memorized the main patterns of the emotional signal, taking into account the chaotic components. The low and stable value of the loss function after 20 epochs indicates the feasibility of limiting the duration of training in order to save resources without losing accuracy.

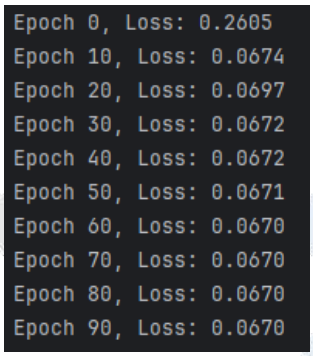



**Figure 3:** Loss function training epochs

## CONCLUSION

The study simulated the emotional-adaptive interaction of collaborative robots in the context of the Industry 5.0 concept using fractal-neural logic, which combines the stochastic nature of human emotions with the capabilities of adaptive machine learning. Based on the simulation of fractal noise using Brownian motion and training of the LSTM model, it was possible to achieve high accuracy of reproduction of the dynamics of the emotional signal, which reflects the system's ability to adapt under conditions of uncertainty.

The results obtained demonstrate the effectiveness of combining fractal modeling with deep neural networks for processing context-dependent interactions between agents, in particular in scenarios where it is important to take into account the emotional aspects of behavior. The developed model allows reproducing the variability of emotional influence in a multi-component environment with limited prior knowledge, which opens up prospects for its application in service robotics, socially oriented production systems and companion robots.

In addition, the results confirm the feasibility of using such models to increase the flexibility and intellectual adaptability of robot teams in changing production or social engineering conditions. Further development of the research involves the integration of the proposed approaches into physical platforms with multisensory state assessment, expanding the spectrum of emotional patterns, as well as optimizing fractal-neural logic in real time.

## REFERENCES

1. Yevsieiev, V., & et al. (2024). Capturing Human Movements in Real Time in Collaborative Robots Workspace within Industry 5.0. Journal of universal science research, 2(10), 232-247.
2. Maksymova, S., & et al. (2025). A Mathematical Model Development for an Automated Control System for Packaging and Sorting Products Closed Area. Multidisciplinary Journal of Science and Technology, 5(5), 149-164.
3. Yevsieiev, V., & et al. (2024). Data Fusion Research for Collaborative Robots-Manipulators within Industry 5.0. ACUMEN: International journal of multidisciplinary research, 1(4), 125-137.
4. Demska, N., & et al. (2025). Analysis of Methods, Models and Algorithms for a Collaborative Robots Group Decentralized Control. ACUMEN: International journal of multidisciplinary research, 2(2), 235-249.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875, 2024-6.875 ResearchBib IF: 9.948 / 2024



5. Yevsieiev, V., & et al. (2025). A human-centric approach to control collaborative robots within Industry 5.0. Multidisciplinary Journal of Science and Technology, 5(5), 351-361.
6. Maksymova, S., & et al. (2025). Decision-Making Model for Controlling a Collaborative Robot-Manipulator Based on the Sensor Fusion Method and the Rules of Rule-Based Systems. Multidisciplinary Journal of Science and Technology, 5(6), 526-538.
7. Lyashenko, V., Abu-Jassar, A. T., Yevsieiev, V., & Maksymova, S. (2023). Automated Monitoring and Visualization System in Production. International Research Journal of Multidisciplinary Technovation, 5(6), 9-18.
8. Baker, J. H., Laariedh, F., Ahmad, M. A., Lyashenko, V., Sotnik, S., & Mustafa, S. K. (2021). Some interesting features of semantic model in Robotic Science. SSRG International Journal of Engineering Trends and Technology, 69(7), 38-44.
9. Sotnik, S., Mustafa, S. K., Ahmad, M. A., Lyashenko, V., & Zeleniy, O. (2020). Some features of route planning as the basis in a mobile robot. International Journal of Emerging Trends in Engineering Research, 8(5), 2074-2079.
10. Maksymova, S., Matarneh, R., & Lyashenko, V. V. (2017). Software for Voice Control Robot: Example of Implementation. Open Access Library Journal, 4(8), 1-12.
11. Sotnik, S., & et al.. (2022). Modern Industrial Robotics Industry. International Journal of Academic Engineering Research, 6(1),. 37-46.
12. Lyashenko, V., & et al.. (2021). Modern Walking Robots: A Brief Overview. International Journal of Recent Technology and Applied Science, 3(2), 32-39.
13. Sotnik, S., & et al.. (2022). Overview of Innovative Walking Robots. International Journal of Academic Engineering Research, 6(4), 3-7.
14. Sotnik, S., & et al.. (2022). Agricultural Robotic Platforms. International Journal of Academic Engineering Research, 6(4), 14-21.
15. Lyashenko, V. V., Matarneh, R., Kobylin, O., & Putyatin, Y. P. (2016). Contour Detection and Allocation for Cytological Images Using Wavelet Analysis Methodology. International Journal, 4(1), 85-94.
16. Sotnik, S., & Lyashenko, V. (2022). Prospects for Introduction of Robotics in Service. Prospects, 6(5), 4-9.
17. Babker, A. M., Altoum, A. E. A., Tvoroshenko, I., & Lyashenko, V. (2019). Information technologies of the processing of the spaces of the states of a complex biophysical object in the intellectual medical system health. International Journal of Advanced Trends in Computer Science and Engineering, 8(6), 3221-3227.
18. Lyashenko, V., Ahmad, M. A., Sotnik, S., Deineko, Z., & Khan, A. (2018). Defects of communication pipes from plastic in modern civil engineering. International Journal of Mechanical and Production Engineering Research and Development, 8(1), 253-262.
19. Sotnik, S., Matarneh, R., & Lyashenko, V. (2017). System model tooling for injection molding. International Journal of Mechanical Engineering and Technology, 8(9), 378-390.
20. Kots, G. P., & Lyashenko, V. (2012). Banking sectors of the economies of European countries in the representation of statistical interrelation between indices that characterize their development. European Applied Sciences, 1, 461-465.
21. Куштим, В. В., & Ляшенко, В. В. (2007). Динаміка розвитку банківського сегмента міжнародного фінансового ринку. Фінанси України, (12), 96-105.
22. Maksymova, S., Matarneh, R., Lyashenko, V. V., & Belova, N. V. (2017). Voice Control for an Industrial Robot as a Combination of Various Robotic Assembly Process Models. Journal of Computer and Communications, 5, 1-15.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875, 2024-6.875 ResearchBib IF: 9.948 / 2024



23. Khan, A., Joshi, S., Ahmad, M. A., & Lyashenko, V. (2015). Some effect of Chemical treatment by Ferric Nitrate salts on the structure and morphology of Coir Fibre Composites. Advances in Materials Physics and Chemistry, 5(1), 39-45.
24. Dobrovolskaya, I., & Lyashenko, V. (2013). Interrelations of banking sectors of European economies as reflected in separate indicators of the dynamics of their cash flows influencing the formation of the resource potential of banks. European Applied Sciences, 1-2, 114-118.
25. Lyashenko, V., Laariedh, F., Ayaz, A. M., & Sotnik, S. (2021). Recognition of Voice Commands Based on Neural Network. TEM Journal: Technology, Education, Management, Informatics, 10(2), 583-591.
26. Ahmad, M. A., Sinelnikova, T., Lyashenko, V., & Mustafa, S. K. (2020). Features of the construction and control of the navigation system of a mobile robot. International Journal of Emerging Trends in Engineering Research, 8(4), 1445-1449.
27. Tahseen A. J. A., & et al.. (2023). Binarization Methods in Multimedia Systems when Recognizing License Plates of Cars. International Journal of Academic Engineering Research (IJAER), 7(2), 1-9.
28. Sotnik S., & et al.. (2022). Key Directions for Development of Modern Expert Systems. International Journal of Engineering and Information Systems (IJEAIS), 6(5), 4-10.
29. Al-Sharo, Y., Abu-Jassar, A., Lyashenko, V., Yevsieiev, V., & Maksymova, S. (2023). A Robo-hand prototype design gripping device within the framework of sustainable development. Indian Journal of Engineering, 20, e37ije1673.
30. Abu-Jassar, A., Hamdan, M., Hamash, K., Boboyorov, S., & Lyashenko, V. (2025, April). Lab Color Model and Contrast Modification as a Tool for Improving the Quality of Medical Images. In 2025 1st International Conference on Computational Intelligence Approaches and Applications (ICCIAA) (pp. 1-7). IEEE.
31. Abu-Jassar, A. T., Attar, H., Amer, A., Lyashenko, V., Yevsieiev, V., & Solyman, A. (2025). Development and Investigation of Vision System for a Small-Sized Mobile Humanoid Robot in a Smart Environment. International Journal of Crowd Science, 9(1), 29-43.
32. Abu-Jassar, A., & et al. (2024). Building a Route for a Mobile Robot Based on the BRRT and A*(H-BRRT) Algorithms for the Effective Development of Technological Innovations. International Journal of Engineering Trends and Technology, 72(11), 294-306.
33. Al-Sharo, Y. M., Abu-Jassar, A. T., Sotnik, S., & Lyashenko, V. (2023). Generalized procedure for determining the collision-free trajectory for a robotic arm. Tikrit Journal of Engineering Sciences, 30(2), 142-151.
34. Attar, H., Abu-Jassar, A. T., Lyashenko, V., Al-qerem, A., Sotnik, S., Alharbi, N., & Solyman, A. A. (2023). Proposed synchronous electric motor simulation with built-in permanent magnets for robotic systems. SN Applied Sciences, 5(6), 160.
35. Chala, O., & et al. (2025). Mathematical Model Based on Multi-Agent Reinforcement Learning (MARL) and Partially Observable Markov Decision Process (POMDP) for Modeling Cargo Movement for a Mobile Robots Group. Multidisciplinary Journal of Science and Technology, 5(4), 480-489.
36. Yevsieiev, V., & et al. (2024). Human Operator Identification in a Collaborative Robot Workspace within the Industry 5.0 Concept. Multidisciplinary Journal of Science and Technology, 4(9), 95-105.
37. Chala, O., & et al. (2025). Bio-Inspired Principles for Modeling Information Collection in Collaborative Robot Environments. Multidisciplinary Journal of Science and Technology, 5(6), 9-18.

38. Nevliudov, I., & et al. (2025). A Small-Sized Robot Prototype Development Using 3D Printing. acta mechanica et automatica, 19(1).
39. Yevsieiev, V., & et al. (2025). Mathematical Model of Local Decision-Making for Collaborative Robots Using Edge Computing. Multidisciplinary Journal of Science and Technology, 5(6), 34-46.
40. Chala, O., & et al. (2025). Using the Human Face Recognition Method Based on the MobileNetV2 Neural Network in Authentication Systems. Multidisciplinary Journal of Science and Technology, 5(3), 882-895.
41. Yevsieiev, V., & et al. (2025). A human-centric approach to control collaborative robots within Industry 5.0. Multidisciplinary Journal of Science and Technology, 5(5), 351-361.
42. Wang, S., & Jiao, R. J. (2025). Cognitive intelligent task allocation for human-automation symbiosis in Industry 5.0 manufacturing systems via non-cooperative game theory: a bi-level optimization approach. The International Journal of Advanced Manufacturing Technology, 136(3), 1717-1739.
43. Arora, S., & et al. (2024). Importance of industry 5.0 in understanding emotional intelligence. In Human-Machine Collaboration and Emotional Intelligence in Industry 5.0, IGI Global, 205-219.
44. Naithani, K., & et al. (2024). The Role of Emotional Intelligence in Industry 5.0. In Human-Machine Collaboration and Emotional Intelligence in Industry 5.0, IGI Global, 154-172.
45. Loizaga, E., & et al. (2023). A comprehensive study of human factors, sensory principles, and commercial solutions for future human-centered working operations in Industry 5.0. IEEE Access, 11, 53806-53829.
46. Ricci, A., & et al. (2025). Understanding the Unexplored: A Review on the Gap in Human Factors Characterization for Industry 5.0. Applied Sciences, 15(4), 1822.
47. Esqueda-Merino, D. M., & et al. (2024). FRACTAL Methodology for Industry 4.0 & Society 5.0-Driven New Product Development: Empowering Engineering Students for Startup Innovation. In 2024 12th International Conference on Information and Education Technology (ICIET), IEEE, 367-371.
48. Akman, A. Z., & Erdirençelebi, M. (2024). A human-centered digital transformation: A bibliometric analysis of society 5.0 and industry 5.0. Istanbul Management Journal, (96), 1-16.
49. Damaševičius, R., & et al. (2024). Exploring the impact of collaborative robots on human–machine cooperation in the era of Industry 5.0. Modern Technologies and Tools Supporting the Development of Industry 5.0, 149-178.
50. Damaševičius, R., & et al. (2024). Exploring the impact of collaborative robots on human–machine cooperation in the era of Industry 5.0. Modern Technologies and Tools Supporting the Development of Industry 5.0, 149-178.
51. Yevsieiev, V., & et al. (2024). A Program for Analyzing the Structure of a Web site Development Using the Parsing Method Based on the Python. Journal of Universal Science Research, 2(4), 172-183.
52. Gurin, D., & et al. (2024). Web site reliability analysis using the python parsing method. Journal of Universal Science Research, 2(5), 113-126.
53. Maksymova, S., & et al. (2025). Microchip Marking Recognition and Identification Using a Computer Vision System Mathematical Model. Multidisciplinary Journal of Science and Technology, 5(4), 321-330.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875, 2024-6.875 ResearchBib IF: 9.948 / 2024



VOLUME-5, ISSUE-9

54. Yevsieiev, V., & et al. (2024). Building a traffic route taking into account obstacles based on the A-star algorithm using the python language. Technical Science Research in Uzbekistan, 2(3), 103-112.