ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-11

MOMENTS OF INERTIA, SECTION MODULI, AND RADII OF GYRATION OF PLANE SECTIONS

Turapov E.I.

Associate Professor, PhD (Engineering), Department of Mechanical Engineering Technology, Almalyk State Technical Institute

The axial moment of inertia of a plane section with respect to a given axis is defined as the sum, taken over the entire area of the section, of the products of the elementary area elements and the squares of their distances from that axis (see Fig. 1).

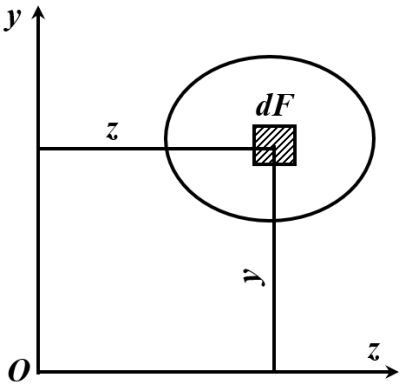


Fig.1

$$J_z = \int_F y^2\,dF,\ \ m^4(sm^4);$$

$$J_y = \int_F z^2\,dF,\ \ m^4\,(sm^4).$$

Axial moments of inertia are always positive and can never be equal to zero.

The centrifugal moment of inertia of a plane section is defined as the sum, taken over the entire area of the section, of the products of the elementary area elements and their distances from two mutually perpendicular axes (see Fig. 1).

$$J_{zy} = \int_F zy\,dF,\ \ m^4(sm^4);$$

The product of inertia may be positive, negative, or equal to zero.

The axial and product moments of inertia of a plane section with respect to axes parallel to the centroidal axes are determined using the following formulas:

$$J_z = J_{z_c} + a^2F;$$

$$J_y = J_{y_c} + b^2F;$$

$$J_{zy} = J_{z_cy_c} + abF,$$

where:

J_{z_c}, J_{y_c} — axial moments of inertia with respect to the centroidal axes;

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-11

$J_{z_c y_c}$ — product of inertia with respect to the centroidal axes;

a, b — distances between the chosen axes and the centroidal axes parallel to them;

F — area of the section.

When the axes are rotated by an angle α, the moments of inertia are determined using the following formulas:

$$J_{z_1} = J_z \cos^2\alpha + J_z \sin^2\alpha - J_{zy} \sin 2\alpha;$$

$$J_{y_1} = J_y \cos^2\alpha + J_z \sin^2\alpha - J_{zy} \sin 2\alpha;$$

$$J_{z_1 y_1} = \frac{J_z - J_y}{2} sin2a + J_{zy} \cos 2\alpha.$$

When the value of the axes rotation angle reaches the magnitude determined by the following formula:

$\mathrm{tg}2\alpha = \frac{2J_{zy}}{J_y - J_z}$, at that point, the axial moments of inertia reach their maximum and minimum values, while the product of inertia becomes zero. The axes occupying such positions are called the principal axes of inertia, and the corresponding axial moments of inertia are referred to as the principal moments of inertia. The principal axes of inertia that pass through the centroid of the section are called the principal centroidal axes of inertia.

The magnitudes of the principal moments of inertia are determined using the following formula:

$$J_{\substack{\max \\ \min}} = \frac{J_z + J_y}{2} \pm \frac{1}{2}\sqrt{(J_z + J_y)^2 + 4{J_{zy}}^2}$$

The axial section modulus of a symmetric section is defined as the ratio of the axial moment of inertia to the distance from the neutral axis to the farthest point of the section:

$$W_z = \frac{J_z}{y_{max}}, \quad m^3(sm^3);$$

$$W_y = \frac{J_y}{z_{max}}, \quad m^3(sm^3).$$

The radius of gyration of a section with respect to the z-axis is defined as the quantity determined by the following formula:

$$i_z = \sqrt{\frac{J_z}{F}}, \quad m,(sm) \quad \text{similarly, } i_y = \sqrt{\frac{J_y}{F}}, \quad m,(sm).$$

The geometric properties of rolled profiles are presented in the GOST tables. In these tables, the horizontal and vertical centroidal axes are denoted as x and y. When using these tables, it is necessary to reconcile the axis designations with those adopted in the specific problem.

ЛИТЕРАТУРА

1. Белявский С.М. (1967) Руководство к решению задач по сопротивлению материалов
2. Биргер И.А., Мавлютов Р.Р. (1986) Сопротивление материалов
3. Вольмир А.С. (1984) Сборник задач по сопротивлению материалов
4. Хасанов Б.Б. “РАСЧЕТ СТАТИЧЕСКИ ОПРЕДЕЛИМОЙ СТЕРЖНЕВОЙ СИСТЕМЫ”. ISSN: 2582-4686 SJIF 2021-3.261, SJIF 2022-2.889, 2023-5.384 ResearchBib IF: 8.848 / 2024. Multidisciplinary journal of science and technology, VOLUME-4, ISSUE-12. 4(12), 292–295. https://doi.org/10.5281/zenodo.14501838

5. B.B. Xasanov., “BURALISH DEFORMATSIYASI”. TECHNICAL SCIENCE RESEARCH IN UZBEKISTAN, 1(5), 547–551. Retrieved from. ISSN (E): 2992-9148 ResearchBib Impact Factor: 9.576 / 2023. VOLUME-1, ISSUE-5
https://doi.org/10.5281/zenodo.10448458
6. Khudjaev M. Shakov V. Khasanov B. “Modeling fluid outflow from a channel consisting of a cylindrical section of a constant radius, and an expanding outlet section”. WEB OF SCIENTIST: INTERNATIONAL SCIENTIFIC RESEARCH JOURNAL ISSN: 2776-0979, Volume 3, Issue 4, April., 2022. https://wos.academiascience.org
7. Khasanov B. B. (2025). “TORSION OF RODS. B INTERNATIONAL BULLETIN OF ENGINEERING AND TECHNOLOGY” (Т. 5, Выпуск 5, сс. 222–224). Zenodo. https://doi.org/10.5281/zenodo.15601456
8. Khudjaev M. K. Khasanov B. B. “STATICS OF A TRIANGULAR WEDGE”. International Journal of Mechatronics and Applied Mechanics 2025, Issue 20, Vol. 1. 202–207. https://ijomam.com/issue-20/
9. Бобоев Х.Х., Хасанов Б.Б. СТАТИЧЕСКИ НЕОПРЕДЕЛИМЫЕ СТЕРЖНЕВЫЕ СИСТЕМЫ. Multidisciplinary journal of science and technology. ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 8.848 / 2024
10. Хасанов Б.Б. (2025). ОБЪЕМНАЯ ДЕФОРМАЦИЯ. Multidisciplinary journal of science and technology, 5(6), 1093–1095. ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024
https://doi.org/10.5281/zenodo.15664985
11. Хасанов Б.Б., ПОТЕНЦИАЛЬНАЯ ЭНЕРГИЯ ДЕФОРМАЦИИ ПРИ ИЗГИБЕ. Multidisciplinary journal of science and technology, 5(6), 1087–1089. SSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024
https://doi.org/10.5281/zenodo.15664964