ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-12

THE PHYSICAL MODEL OF THE ACTION MULTIFUNCTIONAL COMPOSITION LUBRIFICANT AT PROCESS OF THE PROCESSING METAL UNDER PRESSURE

Shaabidov Shorakhmat Askarovich[1], Mirzaev Kakhramon Karshiboevich[2], Botir Muradovich Saydumarov[3]

[1]Doctor of Technical Sciences, Professor, Tashkent State Techical University Named After Islam Karimov

[2]Doctor of Technical Sciences, Associate Professor, Tashkent State Techical University Named After Islam Karimov

[3]Associate Professor, Tashkent State Techical University Named After Islam Karimov

Abstract. Given article is dedicated to analysis mechanism actions of lubricant in process of the processing metal by pressure with sheduling the physical models of friction with lubricant and without it, as well as intercoupling and transition these mode to one another in determined condition.

Keywords. The multifunctional of lubricant, processing under pressure, friction with lubricant and without it, physical models of friction, quality to surfaces, longevity instrument, products of the wear-out.

INTRODUCTION

It is known that the importance of lubricants in the complete process of metal forming under pressure is very great. When forming physical models, it is necessary to clarify and evaluate the operating conditions of lubricants in the deformation chamber. These conditions are characterized by the functions performed by lubricants in various technological processes and a wide range of technological process parameters [1, 2, 3, 4]. Lubricants used in technological processes perform the following tasks: reducing or increasing sliding resistance; improving surface quality; increasing tool life; cooling parts in contact; removing wear products from the deformation chamber; absorbing shocks; shielding contact surfaces; serving as a heat shield; resisting the formation of a hard layer on the metal surface; influencing the microstructure of contact surfaces within certain limits, etc.

In the mechanical and thermal conditions of metal processing, the sliding speed under contact loads is - $V_s = 0{,}01...(6 \div 9) \cdot 10^3$ m/s; the temperature at the point of friction is - t=20…(2÷3)·10^3 ºC; the hydrostatic pressure can be up to $\rho = 0...(100 \div 500) \cdot 10^4$ N/cm^2 [1, 2, 3].

RESEARCH METHODS

One of the features of the use of oils in pressure processing is the partial or complete renewal of surface layers and the release of pure metal or alloys onto the friction surfaces in contact with the oil. The fact that solid (metal, metal oxides, non-metallic) powders, plastic oils, liquids and gases can be used as lubricants in pressure processing also determines the variety of methods for applying (delivering) them to the surfaces.

The viscosity of oils is the main criterion for their use. However, if the viscosity of the lubricant is less than the permissible one, the oil layer gradually disappears, the contact surfaces approach each other, and then their contact without oil occurs. This contact occurs primarily at the peaks of micro-

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-12

roughnesses, then they are eroded (plastic shear), and hydrostatic compression of the remaining oil microvolumes in the depths of the approaching surfaces is observed. This process is called the semi-dry friction process and performs the function of a transition process. This transition process is characterized by the passage of oil microvolumes from one microcavity to another during the sliding process, forming hydrodynamic, semi-dry and dry microbubbles. In the macro- and microstructures of the surfaces, a very complex interaction of the three, connecting details and oil occurs. In this process, in addition to the influence of high micropressures and microtemperatures, the pressure and temperature in large volumes of the surfaces are added to the characteristics of the friction surfaces. This situation explains the inability of surfaces to have uniform friction and lubrication characteristics when using oils of the same composition at the same pressure, speed and temperature.

In the case of semi-dry friction, uniform friction characteristics can be obtained with the uniformity of the following factors:

– natural compatibility of the friction surfaces;
– microgeometry, topography and structure of the surface layer;
– orientation of the microgeometric profile of the surfaces relative to each other;
– contact pressure;
– sliding speed;
– length of the surface;
– physicochemical nature and viscosity of the lubricating material;
– deformation temperature and heat exchange conditions;
– surrounding gas and its pressure;
– physicochemical nature and thickness of oxides and chemical elements on the friction surfaces.

As a conclusion, it can be said that the physical models of the effect of lubricants on metals under pressure are different and they are formed based on the specific conditions created by the specified factors in the center of deformation. Below are the more common physical models.

1. Pure dry friction (fig. 1). Absolute gap may occur under conditions of juvenile cleanliness of rubbing surfaces. Even absorbed layers of vapors and gases will not exist on the surfaces.

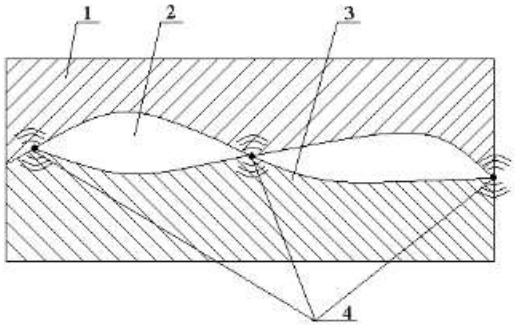


Figure 1. Pure dry friction: 1, 3-rubbing details; 2 - space; 4-plastic yield zones

2. Atmospheric dry friction (fig. 2, *a*). This type of friction is more common, and the friction center is similar to the dry friction center, but steam-gas bubbles under different pressures are observed in the micro- and macro-depths of the surface. Because of this, there is always a certain amount of water in the atmosphere. Friction conditions are also affected by complex thermodynamic processes.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-12

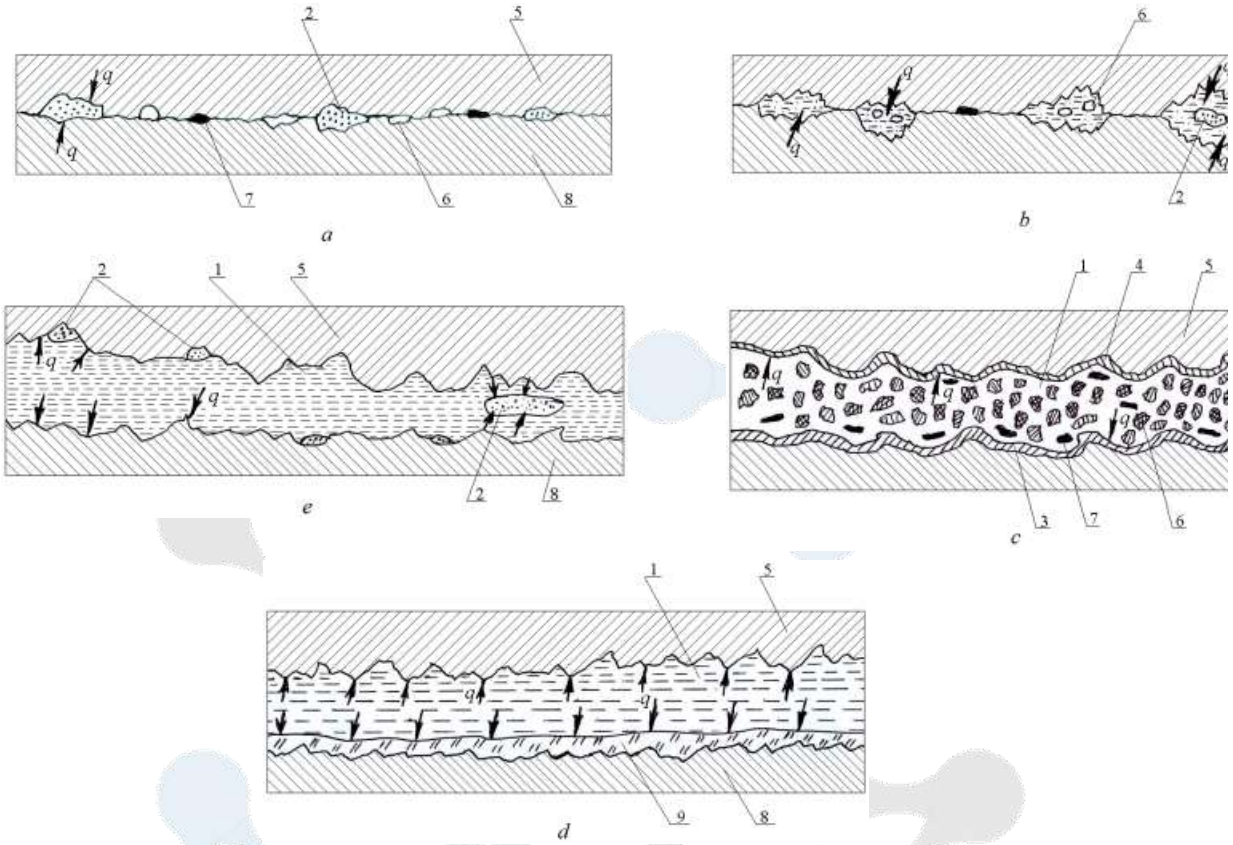


Figure 2. Physical models of friction: *a*-atmospheric dry friction; *b*-semi-liquid or semi-dry friction; *e*-liquid friction; *c*-suspension-liquid friction; *d*-oil or oil-free friction through a continuous solid or plastic-alloy coating;
1-liquid layer of oil; 2-gas mixture; 3-oxidized layer on the surface of the part; 4-oxidized layer on the surface of the second part; 5, 8-surface of the parts;
6-solid phase particle; 7-crushed pieces of oxidized surfaces of parts; 9-plastic alloy or hard coating

3. Dry or wet friction (fig. 2, *b*).

4. Liquid friction (fig. 2, *e*). In this type of friction, friction with liquid atmosphere, friction with liquid gas, and friction with liquid vacuum can be found. It is under these conditions that the sliding surfaces occur in lubricants. The presence of gaseous additives can affect the interaction of the surfaces and the lubrication process.

5. Suspension-liquid friction (fig. 2, *c*). This type of friction is common in the application of various mixtures as a lubricant. Such mixtures include oil-graphite, water-graphite and solid oils in the form of ointments. When using solid lubricants, solid particles of powdered graphite, talc, molybdenum dioxide, molybdenum sulfide, etc. are evenly distributed in a certain amount of paraffin, wax, laundry soap, ceresin, stearin, bitumen, tars based on vegetable oil or other highly viscous petroleum products. In this type of friction, a very complex interaction of the rubbing surfaces, the fluid medium and solid particles occurs. The hydrodynamic process occurs not only in the lubricating layer, but also in the lubricating material. In a suspended-liquid lubricant, the concentration of solid particles in the liquid phase should be optimal.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

VOLUME-5, ISSUE-12

6. Oily or oil-free friction through a continuous hard or plastic viscous coating (fig. 2, *d*). This type of friction is characterized by one of the forms of suspension friction. In this case, the particles of the dispersed phase form a continuous layer on one of the rubbing surfaces. Thin-film varnishes, paints, thick oxides, plastic metals (for example, copper) and oils in the form of alloys are effective in the processing of high-strength alloys under pressure. Although they have a shielding property, they cannot eliminate high resistance to sliding. Therefore, it is recommended to use lubricating materials with optimal viscosity in combination with them.

7. Forced liquid or hydrodynamic friction mode.

8. Anti-oil friction (in this case, friction-accelerating oils are used). This mode of friction has not yet been fully studied.

It should be noted that the above seven physical models of friction are interrelated and can be switched from one to another under certain conditions.

When the properties of multifunctional plastic lubricants based on vegetable oils and technical animal fats, such as adhesion, magneto-optical, antifriction, anti-corrosion, were studied [4, 5, 6], it was found that they are highly effective, cheap, and have a local raw material base. These multifunctional plastic oils can be used in metal pressure processing, ready parts and thin-walled parts of machines, and seasonal storage of working bodies.

CONCLUSIONS

The mechanism of action or physical model of multifunctional plastic lubricants corresponds to the above-mentioned liquid, suspension-liquid, and continuous plastic lubricant coating oil friction phenomena.

REFERENCES

1. Основы трибологии (трение, износ, смазка): Учебник. 2-е изд. переработ. и доп. /А.В.Чичинадзе, Э.Д.Браун, Н.А.Буше и др.; Под общ. ред. А.В.Чичинадзе. – М.: Машиностроение. 2001. - 664 с.

2. Исаченков Е.И. Контактное трение и смазки при обработке металлов давлением.- М.: Машиностроение,1978. -208 с.

3. Сулима А.М., Шулов В.А., Ягодкин Ю.Д. Поверхностный слой и эксплуатационные свойства деталей машин.- М.:Машиностроение, 1993. -240 с.

4. Шаабидов Ш.А. Свойства полифункциональных смазок на основе гудронов и противокоррозионная защита сельскохозяйственной техники, -Ташкент: ТашГТУ, 1994. -136 с.

5. Шаабидов Ш.А., Иргашев А., Мирзаев К.К. Повышение эксплуатационных свойств поверхностных слоев деталей машин. -Ташкент: ТашГТУ, 2012.- 176 с.

6. Шаабидов Ш.А. Технологические основы повышения сохранности сельскохозяйственной техники с применением полифункциональных смазок на основе гудронов растительного происхождения. Дис. докт. техн. наук. -Ташкент, 1998.-445 с.

7.