ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-6

UDC 631.312.8

DESIGN AND WORKING SCHEME OF A TWO-TIER DISC PLOUGH FOR LAYERED SOIL TURNING

Beketov Timur Kazakbayevich,
Assistant, Tashkent State University
technical university,
Hamroev Ramjon Komiljon ugli,
Senior Lecturer, PhD of Tashkent State University
technical university
Email: *hamroyevr@mail.ru*

Аннотатсия. В данной статье изложены конструктивные особенности и схема работы двухъярусного дискового плуга, разработанного для эффективной обработки слоистых почв. Верхний и нижний дисковые корпуса установлены на раме с определённым интервалом, что обеспечивает поэтапное переворачивание почвенного пласта за счёт вертикального и горизонтального смещения корпусов. Верхний корпус обрабатывает почву на глубину 15 см, нижний — на 20 см. Такая конструкция способствует глубокому заделыванию растительных остатков, сорняков и органических веществ. Качество оборота почвенного пласта оценивалось по соотношению b/a > 1,3, что является необходимым условием для полноценного переворачивания слоя. На основе графиков и схем проанализировано смещение и укладка почвенных слоев в процессе работы. Полученные результаты подтверждают эффективность двухъярусного дискового плуга и позволяют рекомендовать его использование на полях, предназначенных для возделывания хлопка, повторных и овощных культур.

Ключевые слова: двухъярусный дисковый плуг, почвенный пласт, качество оборота, глубина обработки, ширина захвата, рабочая схема.

Abstract. This article presents the structural design and operational scheme of a two-tier disc plough developed for effective cultivation of layered soils. The upper and lower disc bodies are mounted on the frame at a specific distance, allowing the soil layer to be turned in two stages due to their vertical and horizontal arrangement. The upper tier works at a depth of 15 cm, while the lower tier operates at 20 cm. This scheme ensures deep burial of weed residues, unharvested stalks, and organic matter. The turning quality was evaluated based on the ratio b/a > 1.3, which is essential for complete soil inversion. Graphs and diagrams illustrate the movement and layering of the soil during operation. The results confirm the efficiency of the two-tier disc plough and recommend its application in cotton, repeated, and vegetable field cultivation.

Keywords: two-tier disc plough, soil layer, turning quality, depth, coverage width, working scheme.

Introduction. Efficient soil preparation remains a fundamental aspect of sustainable agriculture, particularly in regions with complex soil profiles and diverse cropping systems. Among the critical operations, ploughing plays a vital role in breaking up the soil structure, burying crop residues, and enhancing moisture retention and aeration. Traditional mouldboard and reversible ploughs, while effective in certain contexts, often encounter limitations such as high draft resistance, clogging with plant residues, and inadequate incorporation of organic matter in deeper layers.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-6


In recent years, there has been growing interest in the use of disc ploughs as an alternative tillage solution, especially under conditions where energy efficiency and operational reliability are paramount. Disc ploughs, equipped with spherical working bodies, provide notable advantages such as reduced pulling force, higher field productivity, and improved resistance to blockage in fields with dense stubble or weed cover. These features make them particularly suitable for the cultivation of cereal, repeated, and row crops.

To further improve the quality of tillage and residue management, researchers have proposed multi-tiered ploughing systems, which divide the soil profile into layers and process each layer separately. Based on this approach, the Research Institute of Agricultural Mechanization (NIIMSH) has developed and tested a two-tier disc plough designed for layered soil turning. This implement incorporates upper and lower disc bodies mounted in staggered positions, enabling sequential inversion of soil layers with different depths and coverage widths. The two-tier design aims to enhance residue burial, reduce weed resurgence, and improve the agro-technical performance of primary tillage, especially in cotton-growing regions and fields with crop rotations.

This article presents the design concept, working scheme, and functional evaluation of the developed two-tier disc plough, along with its practical implications for improving soil inversion efficiency under varied agricultural conditions.

The tilting fork of the tier ploughing on the frame is installed sequentially at a distance of 450-550 mm from each other of the upper 1 and lower 2 bodies with the same working width (b=35 cm).

In the horizontal plane, the upper housing is mounted with an offset of 130 mm to the left side, unswept relative to the lower housing (Figure 1).

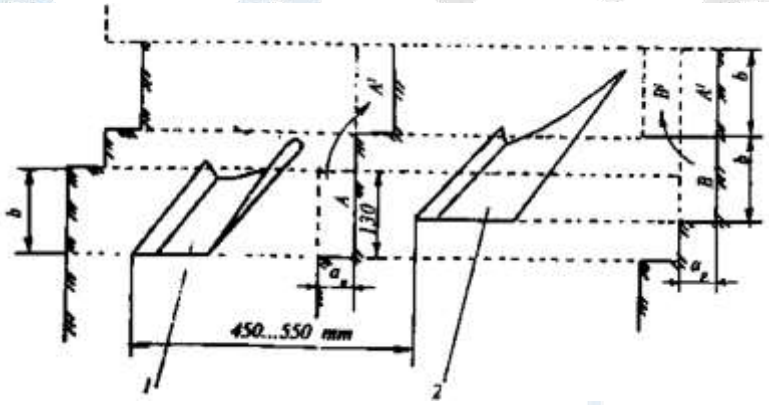

1 - upper tier enclosure; 2 - lower tier enclosure; A, B - plates of upper and lower tier enclosures.

Figure 1: Schematic diagram of double-deck ploughing

In the process of operation the upper body with depth a_u =10 cm, width b=35 cm stacks layer A upside down to the position A'. Following it, the lower hull tilts layer B with a_p =20 cm deep and b=35 cm wide and pulls it on top of A'. Sometimes the hulls are also set so that a_u =a_p =15 cm. The plough wall remaining after the tier plough has a stepped appearance.

This two-tier ploughing method provides a significant agronomic advantage by ensuring that surface residues, including weeds and plant debris found on the upper soil layer (layer A), are completely and deeply buried. This deep incorporation of organic material not only suppresses weed regrowth by limiting their exposure to sunlight and oxygen but also enhances the biological decomposition process, enriching the soil with nutrients. Additionally, the method allows for the effective burial of

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

unharvested stalks, crop residues, and potential pathogens, thereby improving field sanitation and reducing the likelihood of disease carryover between planting cycles.

A key technical parameter influencing the effectiveness of soil inversion is the ratio between the working width (b) of the plough body and the ploughing depth (a). For optimal soil turnover, this ratio should exceed 1.3 (b/a > 1.3), ensuring that the soil layer is adequately lifted and rotated under the influence of the working body. In the case of the developed double-deck disc plough, the ratio is calculated separately for each tier:

1. For the upper body, $b/a_u = 1.5$
2. For the lower body, $b/a_p = 1.75$

Both values exceed the 1.3 threshold, indicating that the ploughing scheme meets the geometric conditions necessary for effective and complete soil inversion. This ensures a high-quality tillage profile with distinct agronomic benefits such as improved residue management, enhanced root zone conditions, and better moisture retention.

Figure 2 shows the process of overturning of the formation sheared by the disc. It is considered that the formation does not deform and does not change its shape. But in fact, as a result of overturning, the layer moves in pieces along the working surface of the disc [3].

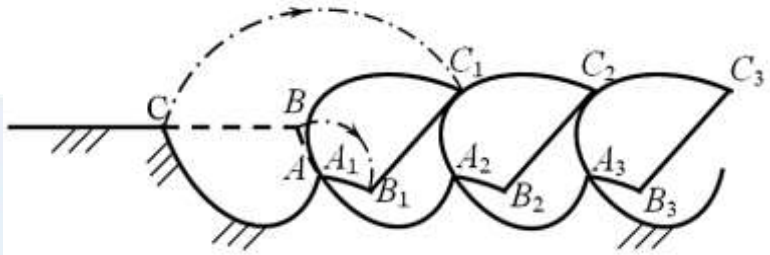



Figure 2: Schematic of formation tilting with conventional disc plough bodies.

Double-deck ploughing with a disc plough, in this method the upper 1 and lower 2 disc bodies with the same working width (*b=30* cm) are installed on the frame for ploughing successively at a distance of 450-500 mm from each other.

In the horizontal plane the upper disc body moves 150 mm towards the unploughed field relative to the lower one (Figure 3). During operation the upper disc body with depth a_{yu} =15 cm and width b = *30* cm turns over and crushes layer *A* to the state A^1 . The following lower disc housing overturns layer *B with* depth a_p =20 cm and width *b=30* cm and presses it on top of layer A^1 . After ploughing fields with double-deck disc ploughs, the remaining plough wall looks like a hemisphere.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

VOLUME-5, ISSUE-6

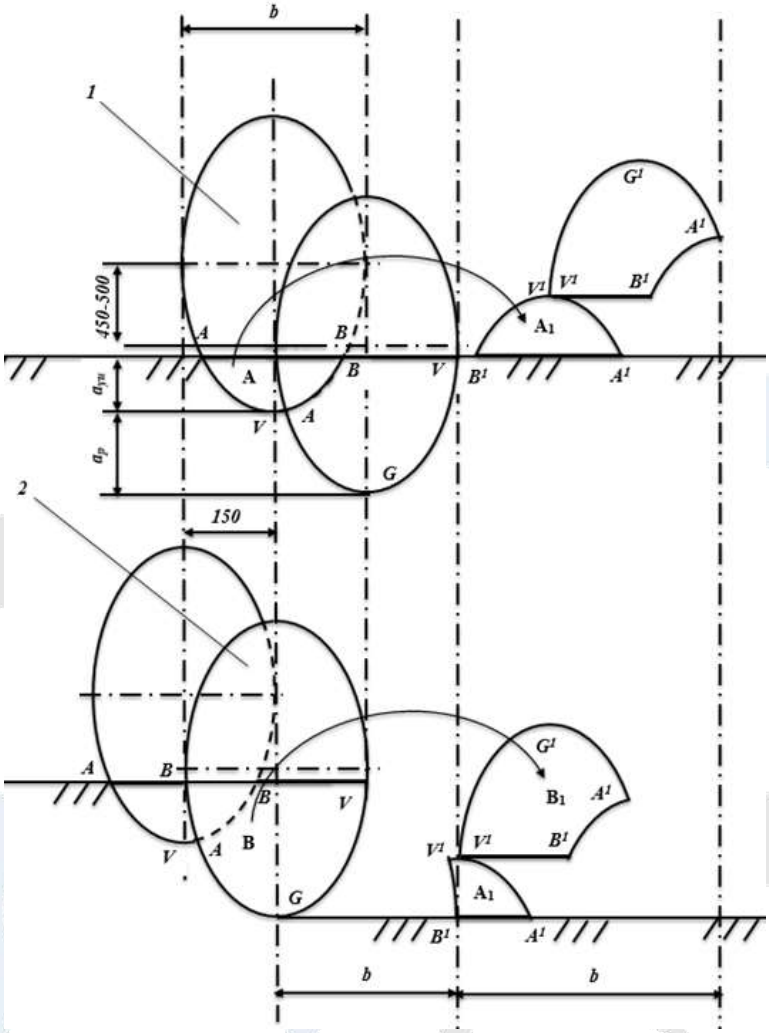

1 - case with upper disc; 2 - case with lower disc; a, b - layers of upper and lower tier.

Figure 3: Ploughing pattern of a double deck disc plough.

Conclusions. The conducted analysis confirms that the effectiveness of soil inversion in ploughing is strongly influenced by the geometric relationship between the disc body's working width (b) and the corresponding ploughing depth (a). To achieve a complete and qualitative turning of the soil layer, this ratio should exceed the threshold of 1.3 (b/a > 1.3), which ensures that the disc has sufficient leverage to lift and rotate the soil mass. Both values are significantly higher than the minimum 1.3 threshold, indicating favorable conditions for high-quality soil inversion across both tiers. This means that during operation, each soil layer is effectively cut, lifted, and flipped, resulting in enhanced burial of crop residues, improved soil structure, and better preparation of the seedbed.

The two-tier configuration also contributes to a stepped ploughing profile, which can enhance moisture retention and aeration. These findings support the practical applicability of the two-tier disc plough in diverse agricultural settings, particularly in fields intended for cotton, secondary crops, and vegetable cultivation.

Literature used

1. Ishmuradov Sh.U., Hamroyev R.K. Mavjud yarusli pluglar tahlili va ikki yarusli diskli plug ish jarayoni sxemasini ishlab chiqish // “Farg‘ona politexnika instituti ilmiy-texnika” jurnali. – Farg‘ona, 2022. – №5 (26). – B. 186-190.

2. Ishmuradov Sh.U., Hamroyev R.K. Shudgorlash, korpus turlari va ikki yarusli diskli plugning

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889,
2024-6.875 ResearchBib IF: 9.948 / 2024

shudgorlash sxemasini ishlab chiqish // “Farg‘ona politexnika instituti ilmiy-texnika” jurnali. – Farg‘ona, 2022. – №5 (26). – B. 38-42.

3. Ishmuradov Sh.U., Hamroyev R.K. Ikki yarusli diskli plugning ish jarayonini tadqiq etish // “Agro ILM” jurnali. – Toshkent, 2023. – №6 (95). – B. 95-96.

4. Ishmuradov Sh.U., Hamroyev R.K. Ikki yarusli diskli plug ishlab chiqish bo‘yicha olib borilgan tadqiqotlarning natijalari // “Agro ILM” jurnali. – Toshkent, 2023. – №3 (96). – Maxsus son. – B. 62-62.

5. Ishmuradov Sh.U., Hamroev R.K. Development of A Double-Deck Disc Plug Ploughing Scheme // International Journal of Biological Engineering and Agriculture. –Vol. 10, 2024. pp. 6-9. (Journal Impact Factor: 10.33, SJIF 2024: 7.665).

6. Ишмурадов Ш.У., Хамроев Р.К. Результаты экпериментальных испытаний современного двухъярусного дискового плуга // Multidisciplinary Journal of Science and Technology. –Vol. 14, 2024. pp. 356-364. (Journal Impact Factor: 8.848, SJIF 2024: 6.875).