ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-11

УЎТ. 633.51+631.674

STUDY OF THE BURIAL OF FILM EDGES USING WORKING ORGANS WITH SPHERICAL DISCS

Abdulkhayev Kh.G. – Doctor of Technical Sciences, Senior Researcher
Namangan State Technical University (NamSTU)
Irgashev J.G. – Independent Researcher
Scientific Research Institute of Agricultural Mechanization (SRIAM)

Аннотация. В статье изложено теоретическое исследование технологического процесса, выполняемого сферическими дисковыми рабочими органами орудия для укладки полиэтиленевой плёнки, разработанные для заделки краев плёнки в почву.

Annotation. The article presents a theoretical study of the technological process performed by spherical disk working bodies of a tool for laying a polyethylene film, designed to seal the edges of the film into the soil.

Ключевые слова: орудия для укладки пленки, сферические дисковые рабочие органы, края пленки, частицы почвы, расстояние выброса, почвенная насып, процесс заделки.


Keywords: tools for laying film, spherical disk working bodies, film edges, soil particles, ejection distance, soil saturation, sealing process.

Introduction. The results of previous studies [1–3] have shown that in the process of laying plastic film along the irrigation furrows of cotton interrows, it is advisable to use “spherical discs” as the working organs that open and then cover the trenches for burying the film edges (Fig. 1). In this method, two “oppositely mounted spherical discs” are employed: one pair to open the trenches for

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

VOLUME-5, ISSUE-11

the film edges, and another to cover the laid film within these trenches (Fig. 2).

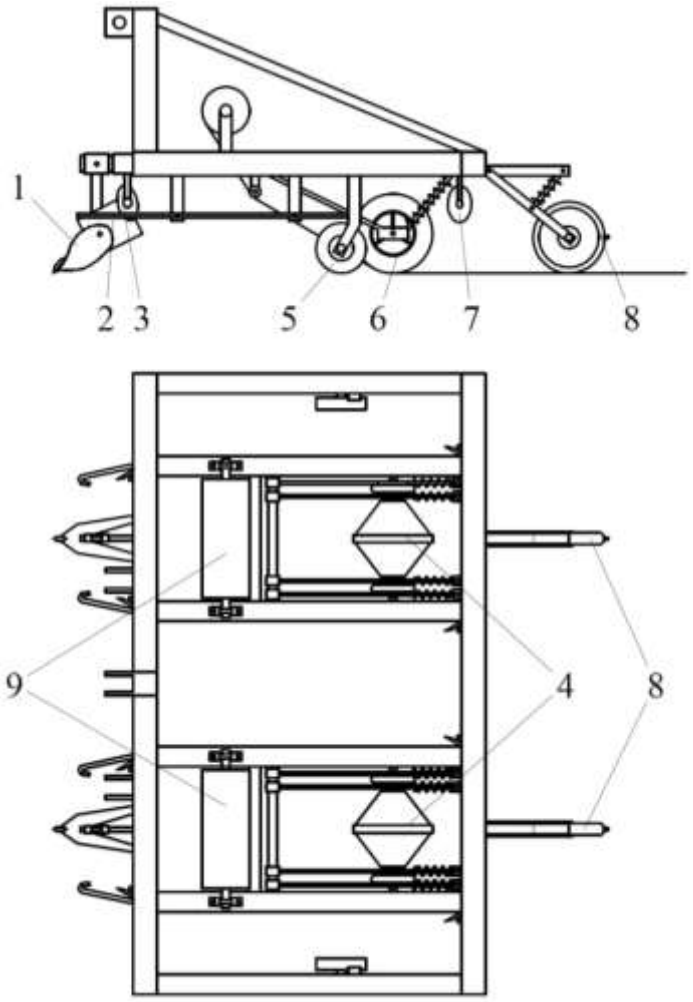

1 – furrow opener; 2 – device for bending cotton stalks; toward the adjacent furrow; 3 – spherical discs (right and left) for opening trenches to lay the film edges; 4 – profiled roller; 5 – support wheels; 6 – film edge pressing wheels;
7 – spherical discs (right and left) for covering the film edges; 8 – film perforating wheel; 9 – bobbin (reel) for feeding the film.


Figure 1. Structural diagram of the laboratory–field device

The soil clods falling from the spherical disc working organs that cover the film edges must satisfy the condition shown in the diagram in Figure 2 to ensure the complete burial of the film edges [4].

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-11

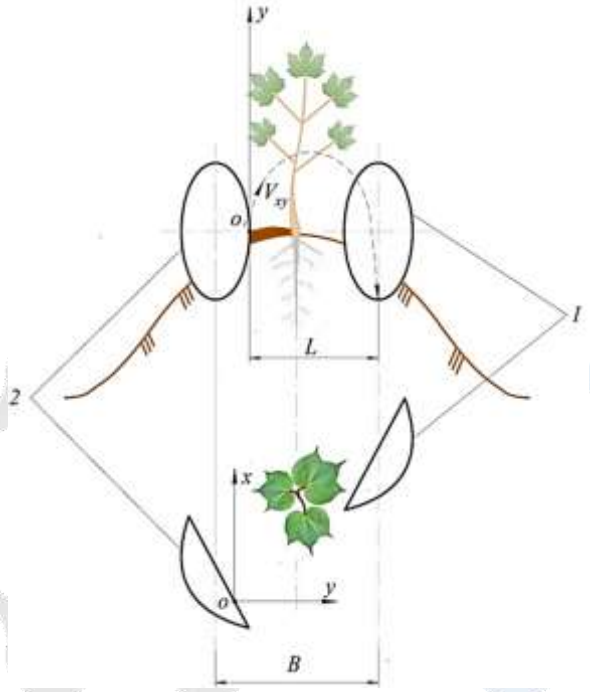

1 – spherical disc working organ that forms the trench for placing the film edge;

2 – spherical disc working organ that covers (buries) the film edge;

Figure 2. Schematic diagram ensuring the burial of the film edge using spherical disc working organs

$$L = B - R_d \sin \beta_s \sin \alpha_t, \quad (1)$$

where L – the transverse throwing distance of the soil clods falling from the spherical disc working organ, m; B – the transverse distance between the spherical discs that form and cover the trench for placing the film edges, m.

When condition (1) is satisfied, the soil clods thrown by the working organs that cover the film edges fall into the center of the trench where the film edge has been laid. As a result of spreading under the natural angle of repose, a soil mound is formed. Consequently, a stable soil ridge of sufficient height is obtained along the film edge (Fig. 3).

The transverse throwing distance of soil clods from the spherical disc working organ is determined by formulating and solving the equation of motion in the plane perpendicular to the direction of movement. This equation has the following form [5, 6]:

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-11

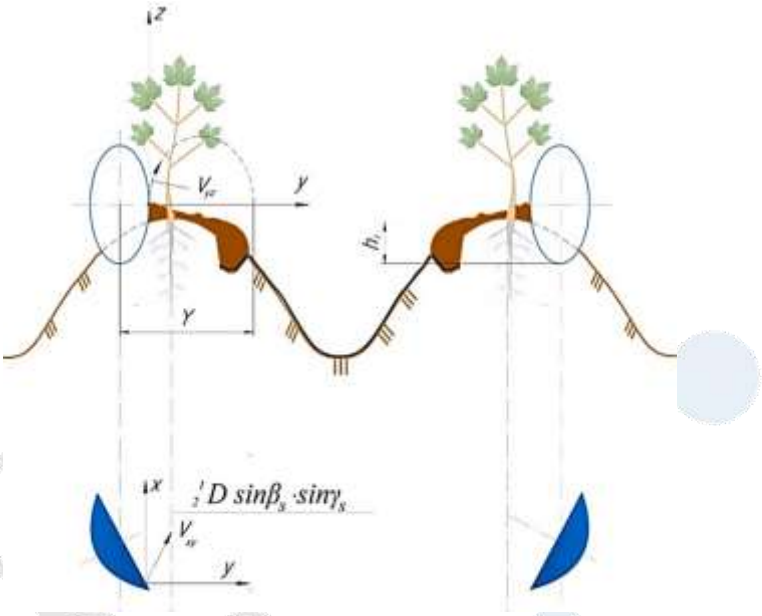


Figure 3. Process of burying the film edge by spherical disc working organs

$$L = V_y \frac{V_z + \sqrt{V_z^2 + 2[R_d(1-\cos\alpha_t) - h_s]g}}{g}, \quad (2)$$

here, V_y and V_z – are the initial components of the absolute velocity V_a^t of the soil clod at the moment it leaves the spherical disc working organ, projected onto the Y and Z coordinate axes, respectively, in m/s.

The values of Vy and Vz in expression (2) are determined using the schematic shown in Figure 4. Accordingly,

$$V_y = V_n^t(\sin\varphi_t \cos\beta_s + \cos\varphi_t \sin\alpha_t \sin\beta_s) + \\ + V_\kappa^t \cos\alpha_t \sin\beta_s; \quad (3)$$

$$V_z = V_\kappa^t \sin\alpha_t - V_n^t \cos\varphi_t \cos\alpha_t, \quad (4)$$

here V_n^t – the relative velocity of the soil clod at the moment it leaves the spherical disc working organ, m/s; V_κ^t – the translational velocity of the soil clod at the moment it leaves the spherical disc working organ, m/s; φ_t – φ the limiting value of the angle, i.e., the angle of the soil clod at the moment it leaves the spherical disc working organ; α_t – the rotation angle of the soil clod relative to the vertical axis of the disc at the moment it leaves the disc, °.

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-11

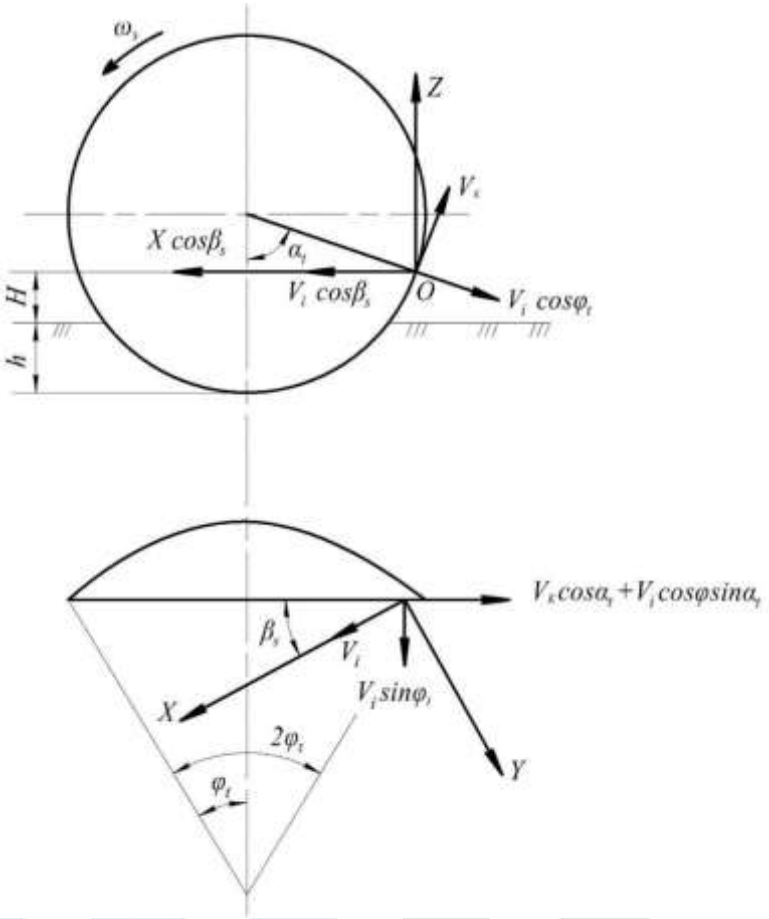


Figure 4. Schematic diagram for determining V_y and V_z

Based on the results of previously conducted studies

$$V_n^t = \left\{ -e^{2f(\varphi_0 - \arcsin(R_d/R_s))} \left[\frac{6fgR_s}{(1+4f^2)} \sin\varphi_0 \cos\alpha_t + 2gR_s\left(1 - \frac{4f^2}{1+2f}\right) \times \right.\right.$$

$$\left. \times \sin\varphi_0 \cos\alpha_t + V_i^2 \frac{R_s^2}{R_d^2} \cos^2\beta_s \left(\frac{\sin 2\varphi_0}{f} - \sin^2\varphi_0 \right) \right] +$$

$$+ \frac{6fg\sqrt{R_s^2 - R_d^2}}{1+4f^2} \cos\alpha_t + 2gR_d\left(\frac{1-2f^2}{1+4f^2}\right) +$$

$$\left. + \cos\alpha_T + V_i^2 \frac{R_s^2}{R_d^2} \cos^2\beta_s \left[\frac{2R_d\sqrt{R_s^2 - R_d^2}}{fR_s^2} - \left(\frac{R_d}{R_s}\right)^2 \right] \right\}^{\frac{1}{2}}; \qquad (5)$$

$$V_\kappa^t = V_i \cos\beta_s; \qquad (6)$$

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-11

$$\cos\varphi_t = \frac{\sqrt{R_s^2 - R_d^2}}{R_s}; \tag{7}$$

$$\sin\varphi_t = \frac{R_d}{R_s}. \tag{8}$$

Taking these into account, expressions (3) and (4) take the following form

$$V_y = \left\{ -e^{2f(\varphi_0 - \arcsin(R_d/R_s))} \left[\frac{6fgR_s}{(1+4f^2)} \sin\varphi_0 \cos\alpha_t + 2gR_s \left(\frac{1-2f^2}{1+4f^2} \right) \sin\varphi_0 \times \right. \right.$$

$$\times \cos\alpha + V_i^2 \frac{R_s^2}{R_d^2} \cos^2\beta_s \left(\frac{\sin 2\varphi_0}{f} - \sin^2\varphi_0 \right) \left. \right] + \frac{6fg\sqrt{R_s^2 - R_d^2}}{1+4f^2} \cos\alpha_t +$$

$$+ 2gR_d \left(\frac{1-2f^2}{1+4f^2} \right) \cos\alpha_t + V_i^2 \frac{R_s^2}{R_d^2} \cos^2\beta_s \left[\frac{2R_d\sqrt{R_s^2 - R_d^2}}{fR_s^2} - \left(\frac{R_d}{R_s} \right)^2 \right] \left. \right\}^{\frac{1}{2}} \times$$

$$\times \left(\frac{R_d}{R_s} \cdot \cos\beta_s + \frac{\sqrt{R_s^2 - R_d^2}}{R_s} \sin\alpha_t \sin\beta_s \right) + \frac{1}{2} V_i \sin 2\beta_s \cos\alpha_t; \tag{9}$$

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

VOLUME-5, ISSUE-11

$$V_Z = V_i \cos\beta \sin\alpha_t - \left\{ -e^{2f(\varphi_0 - \arcsin(R_d/R_s))} \left[\frac{6fgR_s}{(1+4f^2)} \sin\varphi_0 \cos\alpha_t + \right. \right.$$

$$+ 2gR_s \left(\frac{1-2f^2}{1+4f^2} \right) \sin\varphi_0 \cos\alpha_t + V_i^2 \frac{R_s^2}{R_d^2} \cos^2\beta_z \left(\frac{\sin 2\varphi_0}{f} - \sin^2\varphi_0 \right) \left. \right] +$$

$$+ \frac{6fg\sqrt{R_s^2 - R_d^2}}{1+4f^2} \cos\alpha_t + 2gR_d \left(\frac{1-2f^2}{1+4f^2} \right) \cos\alpha_t +$$

$$\left. + V_i^2 \frac{R_s^2}{R_d^2} \cos^2\beta_s \left[\frac{2R_d\sqrt{R_s^2 - R_d^2}}{fR_s^2} - \left(\frac{R_d}{R_s} \right)^2 \right] \right\}^{\frac{1}{2}} + \frac{\sqrt{R_s^2 - R_d^2}}{R_s} \cos\alpha_t . \qquad (10)$$

Taking expressions (9) and (10) into account, expression (1)takes the following form:

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-11

$$L=\frac{1}{g}\left\{\left\{-e^{2f(\varphi_0-\arcsin(R_d/R_s))}\left[\frac{6fgR_s}{(1+4f^2)}\sin\varphi_0\cos\alpha_t+2gR_s\left(\frac{1-2f^2}{1+4f^2}\right)+\right.\right.\right.$$

$$\left.+\sin\varphi_0\cos\alpha_t+V_i^2\frac{R_s^2}{R_d^2}\cos^2\beta_s\left(\frac{\sin 2\varphi_0}{f}-\sin^2\varphi_0\right)\right]+\frac{6fg\sqrt{R_s^2-R_d^2}}{1+2f}\cos\alpha_t+$$

$$+2gR_d\left(\frac{1-2f^2}{1+4f^2}\right)\cos\alpha_t+V_i^2\frac{R_s^2}{R_d^2}\cos^2\beta_s\left[\frac{2R_d\sqrt{R_s^2-R_d^2}}{fR_s^2}-\left(\frac{R_d}{R_s}\right)^2\right]\Bigg\}^{\frac{1}{2}}\times$$

$$\times\left(\frac{R_s^2}{R_d^2}\cos^2\beta+\frac{\sqrt{R_s^2-R_d^2}}{R_s}\sin\alpha_t\sin\beta_s\right)+\frac{1}{2}V_i\sin 2\beta_s\cos\alpha_t\Bigg\}\Big\{\Big\{V_i\sin 2\beta_s\cos\alpha_t-$$

$$-\left\{-e^{2f(\varphi_0-\arcsin(R_d/Rs))}\left[\frac{6fgR_s}{(1+4f^2)}\sin\varphi_0\cos\alpha_t+2gR_s\left(\frac{1-2f^2}{1+4f^2}\right)\sin\varphi_0\cos\alpha_t+\right.\right.$$

$$\left.+V_i^2\frac{R_s^2}{R_d^2}\cos^2\beta_s\left(\frac{\sin 2\varphi_0}{f}-\sin^2\varphi_0\right)\right]+\frac{6fg\sqrt{R_s^2-R_d^2}}{1+2f}\cos\alpha_t+2gR_d\left(\frac{1-2f^2}{1+4f^2}\right)\cos\alpha_t+$$

$$+V_i^2\frac{R_s^2}{R_d^2}\cos^2\beta_s\left[\frac{2R_d\sqrt{R_s^2-R_d^2}}{fR_s^2}-\left(\frac{R_d}{R_s}\right)^2\right]\Bigg\}^{\frac{1}{2}}\frac{\sqrt{R_s^2-R_d^2}}{R_s}\cos\alpha_t\Bigg\}+\Big\{\Big\{V_i\cos\beta_s\sin\alpha_t-$$

$$-\left\{-e^{2f(\varphi_0-\arcsin(R_d/R_s))}\left[\frac{6fgR_s}{(1+4f^2)}\sin\varphi_0\cos\alpha_t+2gR_s\left(\frac{1-2f^2}{1+4f^2}\right)\sin\varphi_0\cos\alpha_t+V_i^2\frac{R_s^2}{R_d^2}\cos^2\beta_s\times\right.\right.$$

$$\left.\times\left(\frac{\sin 2\varphi_0}{f}-\sin^2\varphi_0\right)\right]+\frac{6fg\sqrt{R_s^2-R_d^2}}{1+4f^2}\cos\alpha_t+2gR_d\left(\frac{1-2f^2}{1+4f^2}\right)\cos\alpha_t+V_i^2\frac{R_s^2}{R_d^2}\cos^2\beta_s\times$$

$$\left.\times\left[\frac{2R_d\sqrt{R_s^2-R_d^2}}{fR_s^2}-\left(\frac{R_d}{R_s}\right)^2\right]\Bigg\}^{\frac{1}{2}}\frac{\sqrt{R_s^2-R_d^2}}{R_s}\cos\alpha_t\right\}^2+2\left[R_d(1-\cos\alpha_t)+h_s\right]g\Bigg\}^{\frac{1}{2}}. \qquad (11)$$

Taking this into account, condition (1) takes the following

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-11

$$\frac{1}{g}\left\{\left\{-e^{2f(\varphi_0-\arcsin(R_d/R_s))}\left[\frac{6fgR_s}{(1+4f^2)}\sin\varphi_0\cos\alpha_t+2gR_s\left(\frac{1-2f^2}{1+4f^2}\right)+\right.\right.\right.$$

$$\left.+\sin\varphi_0\cos\alpha_t+V_i^2\frac{R_s^2}{R_d^2}\cos^2\beta_s\left(\frac{\sin 2\varphi_0}{f}-\sin^2\varphi_0\right)\right]+\frac{6fg\sqrt{R_s^2-R_d^2}}{1+2f}\cos\alpha_t+$$

$$+2gR_d\left(\frac{1-2f^2}{1+4f^2}\right)\cos\alpha_t+V_i^2\frac{R_s^2}{R_d^2}\cos^2\beta_s\left[\frac{2R_d\sqrt{R_s^2-R_d^2}}{fR_s^2}-\left(\frac{R_d}{R_s}\right)^2\right]\Bigg\}^{\frac{1}{2}}\times$$

$$\times\left(\frac{R_s^2}{R_d^2}\cos^2\beta+\frac{\sqrt{R_s^2-R_d^2}}{R_s}\sin\alpha_t\sin\beta_s\right)+\frac{1}{2}V_i\sin 2\beta_s\cos\alpha_t\Bigg\}\{\{V_i\sin 2\beta_s\cos\alpha_t-$$

$$-\{-e^{2f(\varphi_0-\arcsin(R_d/Rs))}\left[\frac{6fgR_s}{(1+4f^2)}\sin\varphi_0\cos\alpha_t+2gR_s\left(\frac{1-2f^2}{1+4f^2}\right)\sin\varphi_0\cos\alpha_t+\right.$$

$$\left.+V_i^2\frac{R_s^2}{R_d^2}\cos^2\beta_s\left(\frac{\sin 2\varphi_0}{f}-\sin^2\varphi_0\right)\right]+\frac{6fg\sqrt{R_s^2-R_d^2}}{1+2f}\cos\alpha_t+2gR_d\left(\frac{1-2f^2}{1+4f^2}\right)\cos\alpha_t+$$

$$+V_i^2\frac{R_s^2}{R_d^2}\cos^2\beta_s\left[\frac{2R_d\sqrt{R_s^2-R_d^2}}{fR_s^2}-\left(\frac{R_d}{R_s}\right)^2\right]\Bigg\}^{\frac{1}{2}}\frac{\sqrt{R_s^2-R_d^2}}{R_s}\cos\alpha_t\Bigg\}+\{\{V_i\cos\beta_s\sin\alpha_t-$$

$$-\{-e^{2f(\varphi_0-\arcsin(R_d/R_s))}\left[\frac{6fgR_s}{(1+4f^2)}\sin\varphi_0\cos\alpha_t+2gR_s\left(\frac{1-2f^2}{1+4f^2}\right)\sin\varphi_0\cos\alpha_t+V_i^2\frac{R_s^2}{R_d^2}\cos^2\beta_s\times\right.$$

$$\left.\times\left(\frac{\sin 2\varphi_0}{f}-\sin^2\varphi_0\right)\right]+\frac{6fg\sqrt{R_s^2-R_d^2}}{1+4f^2}\cos\alpha_t+2gR_d\left(\frac{1-2f^2}{1+4f^2}\right)\cos\alpha_t+V_i^2\frac{R_s^2}{R_d^2}\cos^2\beta_s\times$$

$$\left.\times\left[\frac{2R_d\sqrt{R_s^2-R_d^2}}{fR_s^2}-\left(\frac{R_d}{R_s}\right)^2\right]\Bigg\}^{\frac{1}{2}}\frac{\sqrt{R_s^2-R_d^2}}{R_s}\cos\alpha_t\right\}^2+2\left[R_d(1-\cos\alpha_t)+h_s\right]g\Bigg\}^{\frac{1}{2}}=B-R_d\sin\beta_s\sin\alpha_t. \quad (12)$$

Analysis of this expression shows that the quality and adequacy of burying the film edges are primarily ensured by the radius (diameter) of the spherical disc working organ, its curvature radius,

ISSN: 2582-4686 SJIF 2021-3.261,SJIF 2022-2.889, 2024-6.875 ResearchBib IF: 9.948 / 2024

THE MULTIDISCIPLINARY JOURNAL OF SCIENCE AND TECHNOLOGY

VOLUME-5, ISSUE-11

the installation angle relative to the direction of movement, the transverse distance between the disc working organs that form and cover the trenches where the film edges are laid, as well as by selecting the correct forward speed of the implement.

REFERENCES

1.Абдулхаев Х.Г. , Иргашев Ж.Г. Электрон ҳисоблаш машиналари учун яратилган дастурнинг расмий рўйхатдан ўтказилганлиги тўғрисидаги гувоҳнома. Ўзбекистон Республикаси Адлия вазирлиги № DGU 48843. “Қурилма дисклари билан ариқча ҳосил қилиш шартлари ва уларга таъсир кўрсатувчи омиллар” Талабнома рақами: DT 202502001 Ўзбекистон Республикасининг дастурий маҳсулотлар давлат реестри. 2025 йил 20 март.

2. Бойметов Р.И. , Абдулхаев Х.Ғ. , Иргашев Ж.Г. . “Қишлоқ хўжалик экинларини етиштиришда суғориш сувини тежайдиган технологияси” // Oriental renaissance: innovative, educational, natural and social sciences scientific journal. ISSN 2181-1784 VOLUME 2, ISSUE 1 Impact Factor: 5.423 January 2022. www.oriens.uz. – Б. 315-322.

3. Иргашев Ж.Г. “Ғўзани қора полиэтилен плёнка тўшалган эгатлардан суғориш самараси. // Ўзбекистон қишлоқ ва сув хўжалиги журнали. – Тошкент, 2023. – № 4. – Б.48-49.

4. Иргашев Ж.Г. “Эгатларга тўшалган плёнкада сув ўтказувчи тешик ҳосил қилувчи мослама параметрларига оид” // Агро илм – Ўзбекистон қишлоқ ва сув хўжалиги журнали. – Тошкент, 2025. – Махсус сон № 2. (109) – Б.251-252.

5. Абдулхаев Х.Ғ., Иргашев Ж.Г. “Ғўзанинг суғориладиган эгатларига қора полиэтилен плёнка тўшаш” // Ўзбекистон аграр фани хабарномаси. Илмий-амалий журнал. – Тошкент, 2025. – № 2. (21). – Б.10-12.

6. Абдулхаев Х.Ғ., Иргашев Ж.Г. “Ғўзанинг суғориш эгатларига қора полиэтилен плёнка тўшайдиган қурилма” // Юқори самарали қишлоқ хўжалиги машиналарини яратиш ва техника воситалардан фойдаланиш даражасини оширишнинг инновацион ечимлари” номли халқаро илмий-техник конференциядаги илмий мақолалар тўплами. – Гулбаҳор: ҚХМИТИ, 2022. – Б. 230-234.

7. Абдулхаев Х.Ғ., Иргашев Ж.Г. Плёнка тўшаб суғориладиган далларга қўйиладиган талаблар // Юқори самарали қишлоқ хўжалик машиналарини яратиш ва техника воситаларидан фойдаланиш даражасини оширишнинг инновацион ечимлари: Халқаро илмий-техник конференцияси. – Гулбаҳор: ҚХМИТИ, 2023. – Б.198-199.

8. Абдулхаев Х.Ғ., Иргашев Ж.Г. Плёнкани тупроқ билан кўмадиган сферик дискли иш органи диаметрини унинг иш кўрсаткичларига таъсири // “Ilg‘or muhandislik maktablarini rivojlantirishda fan, ta’lim va ishlab chiqarish integratsiyasi: muammolar va yechimlar” mavzusida respublika ilmiy va ilmiy-texnik anjuman materiallari to‘plami. – Namangan: NamDTU, 2025. – Б.330-332.